



- (51) International Patent Classification:
E05B 29/00 (2006.01) *E05B 21/06* (2006.01)
- (21) International Application Number:
PCT/FI2013/050733
- (22) International Filing Date:
4 July 2013 (04.07.2013)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20126160 7 November 2012 (07.11.2012) FI
- (71) Applicant: **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).
- (72) Inventor: **MALINEN, Perttu**; Visapuuntie 2, FI-80160 Joensuu (FI).
- (74) Agent: **BERGGREN OY AB**; P.O. Box 16, (Antinkatu 3 C), FI-00101 Helsinki (FI).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DISC TUMBLER CYLINDER LOCK AND KEY COMBINATION

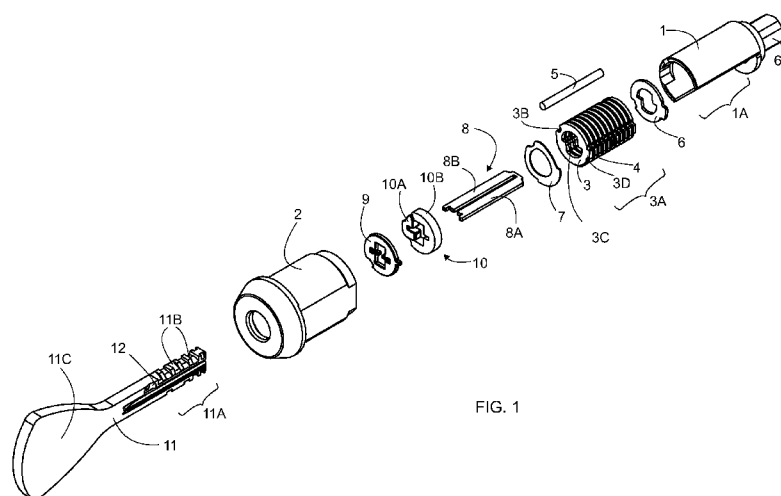


FIG. 1

(57) Abstract: The rotation limiter disc means (10) of a disc tumbler cylinder lock-key-combination are arranged to be rotated by a key (11), wherein the rotation limiting means have no pieces non-rotatably attached to the inner cylinder (1). The rotation limiter disc means (10) are composed of a frame piece (10B) and a limiter piece (10A). The frame piece (10B) is a circular disc having an opening (53) in the middle of the disc. The opening extends up to the border (52) of the disc widening towards the border, and to the section on the wider side of the opening is disposed a limiter piece (10A). On the inner surface (62) of the inner cylinder (1) is a recess (25) at the site of the limiter disc means (10). The key (11) has at least one bevel-edged cavity (12).

