



(43) International Publication Date
7 November 2013 (07.11.2013)

- (51) International Patent Classification:
B65D 83/02 (2006.01) *B65D 5/72* (2006.01)
B65D 85/10 (2006.01)
- (21) International Application Number:
PCT/EP2013/000510
- (22) International Filing Date:
21 February 2013 (21.02.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12003036.6 30 April 2012 (30.04.2012) EP
- (71) Applicant: **PHILIP MORRIS PRODUCTS S.A.**
[CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).
- (72) Inventors: **BRÜGGER, Kevin**; Kannenbaumstrasse 29,
CH-4616 Kappel (CH). **KRASIEV, Sergey**; Route Can-
tonale 21, CH-1025 Saint Sulpice (CH).
- (74) Agent: **HILGERS, Hans**; Grünecker, Kinkeldey, Stock-
mair & Schwanhäusser, Leopoldstrasse 4, 80802 München
(DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SLIDE AND SHELL CONTAINER WITH LEDGE

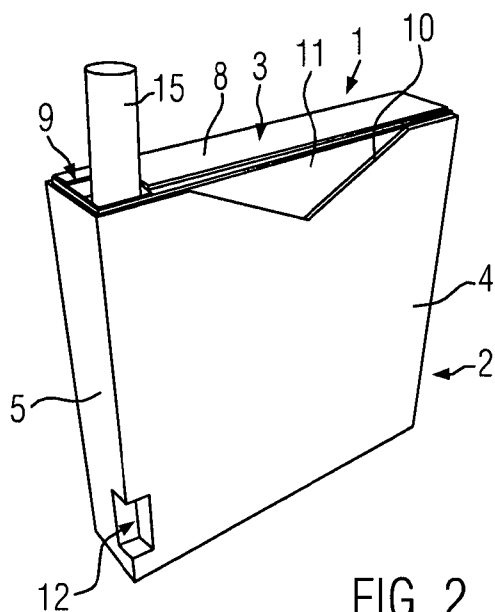

(57) Abstract: The present invention relates to a container for rod-shaped consumer items, wherein a top wall (8) of the container comprises an opening (9), and the container further comprises a ledge (12), which is arranged below the opening. The top wall (8) is adapted to be movable in the vertical direction relative to the ledge (12), in between a lower position and an upper position. The container comprises an inner slide (3) and an outer shell (2), wherein the slide is vertically movably arranged in the shell, wherein the shell (3) comprises the ledge (12), and the slide (2) comprises the top wall (8) with the opening, and wherein the ledge protrudes through a cut-out (19) into the slide.