

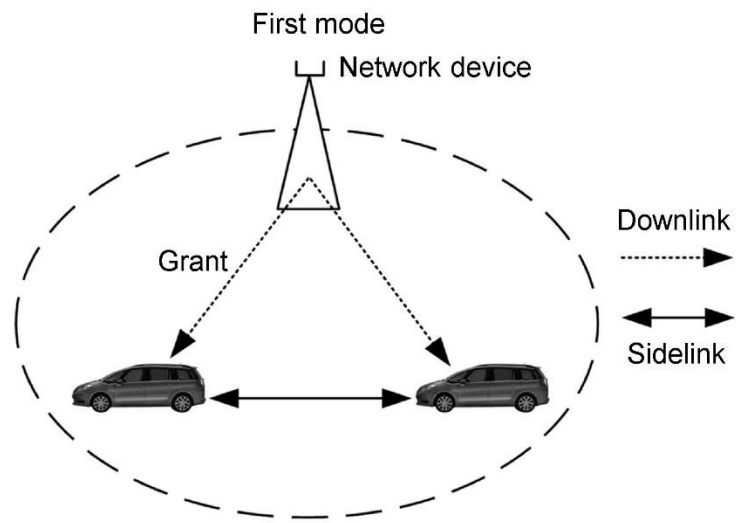


FIG. 1

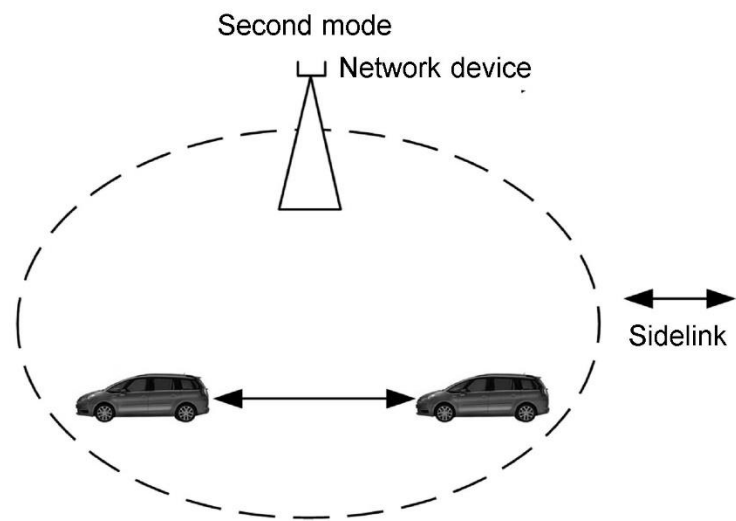


FIG. 2




FIG. 3

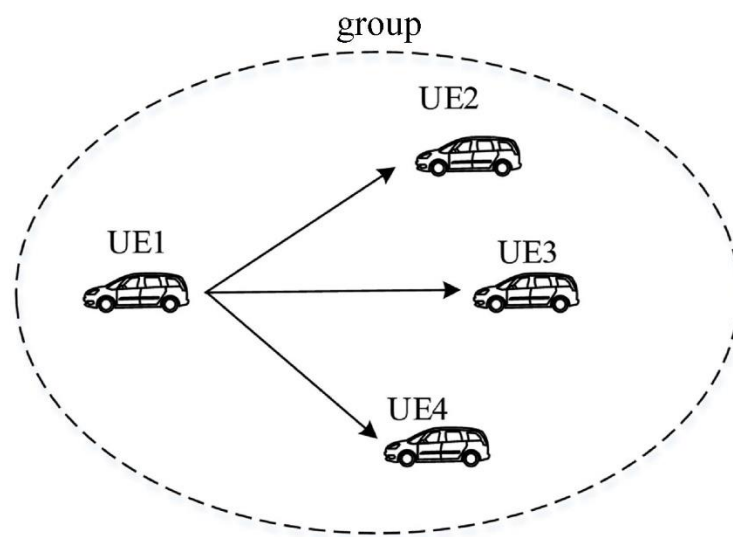


FIG. 4

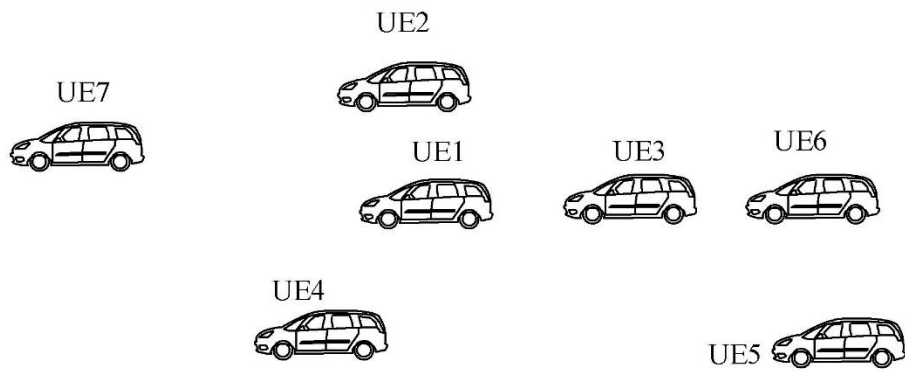


FIG. 5

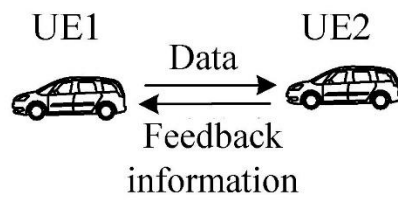


FIG. 6

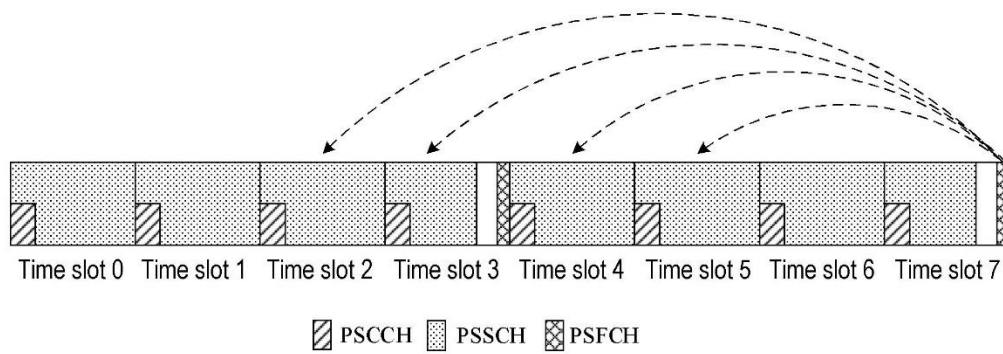


FIG. 7

Acquiring, by a first terminal device, first configuration information, where the first configuration information is used to determine a sidelink feedback configuration, or the first configuration information is used to determine a maximum number of sidelink feedback channels that can be simultaneously transmitted by the first terminal device

S101

FIG. 8

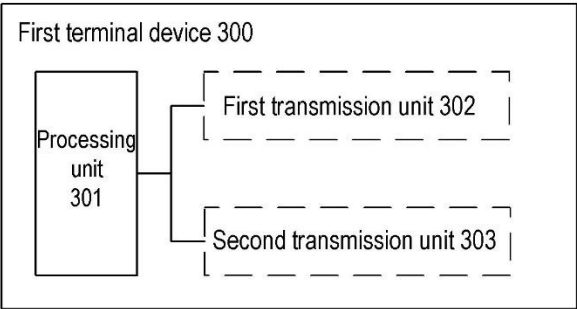


FIG. 9

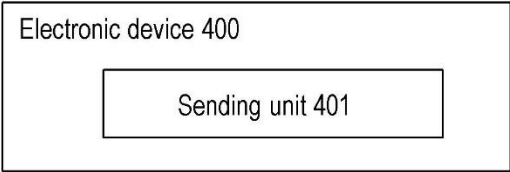


FIG. 10

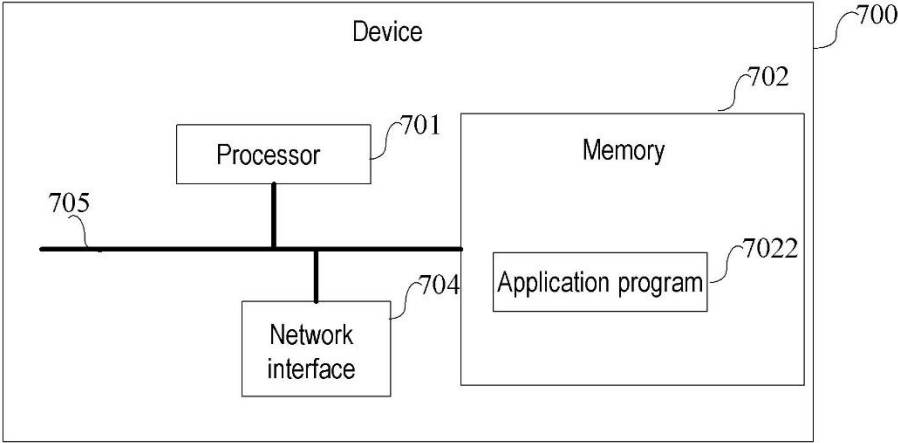


FIG. 11