

Fig.1

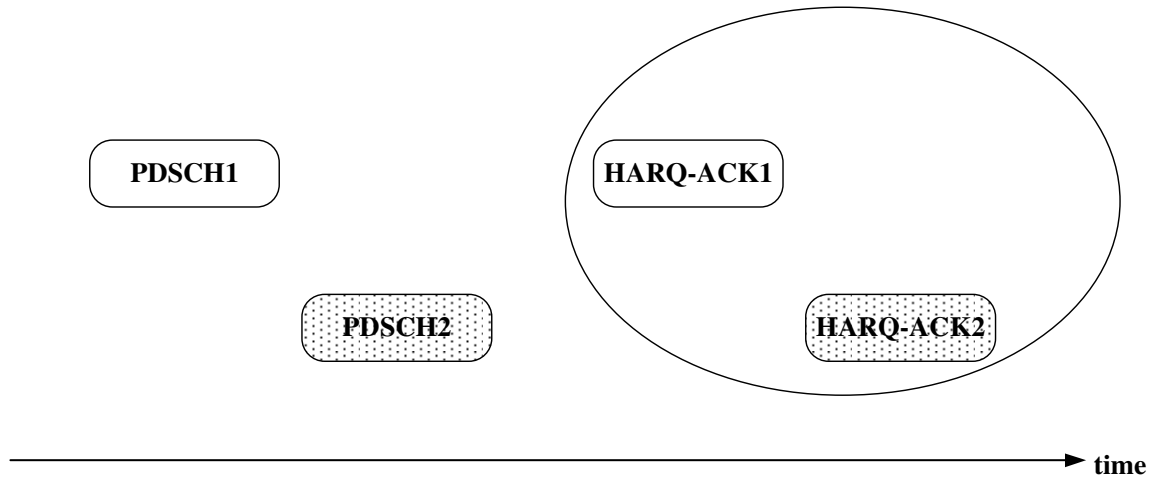


Fig.2

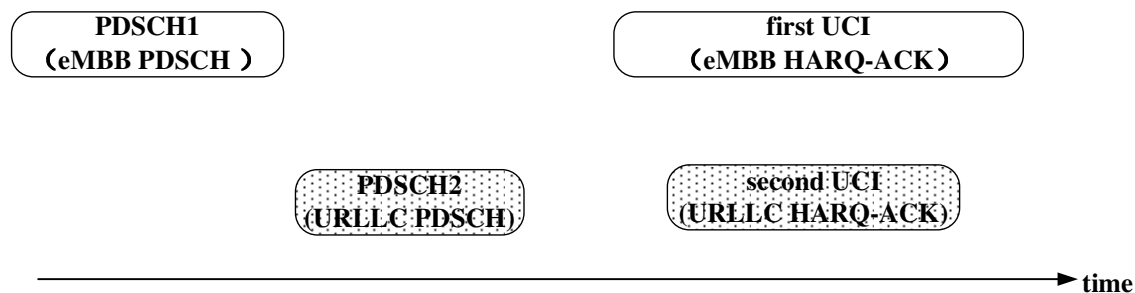


Fig.3

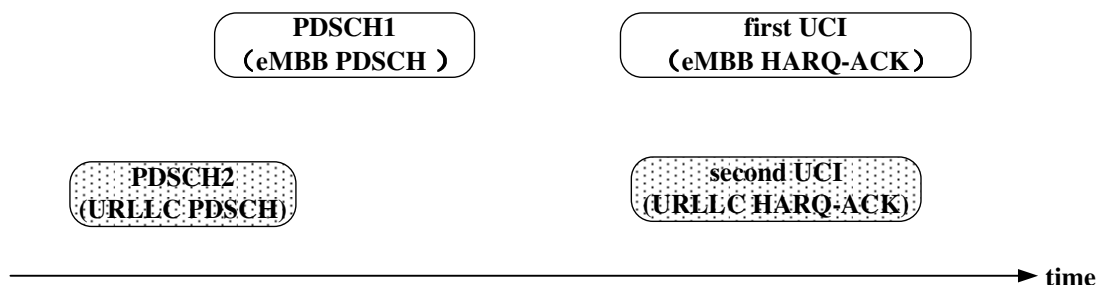


Fig.4

if a terminal determines or would transmit at least two PUCCHs which are overlapped, transmitting, by the terminal, the first UCI and the second UCI in a third PUCCH, wherein different code rates are used for the first UCI and the second UCI 51

Fig.5

if a terminal determines or would transmit at least two PUCCHs which are overlapped, receiving, by a base station, a first UCI and a second UCI transmitted by the terminal in a third PUCCH, the at least two PUCCHs comprising a first PUCCH and a second PUCCH, wherein different code rates are used for the first UCI and the second UCI 61

Fig.6

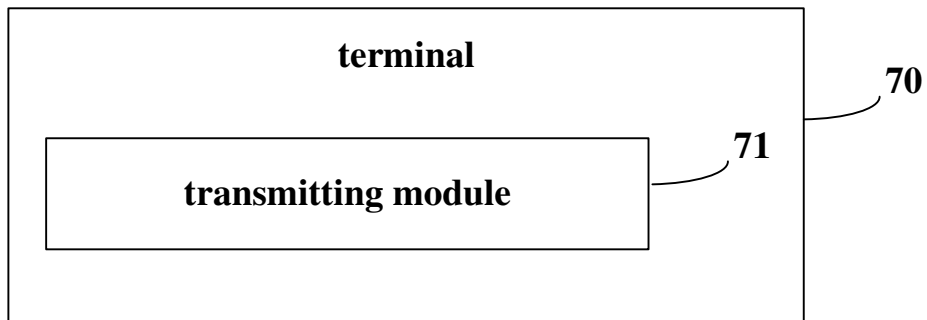


Fig.7

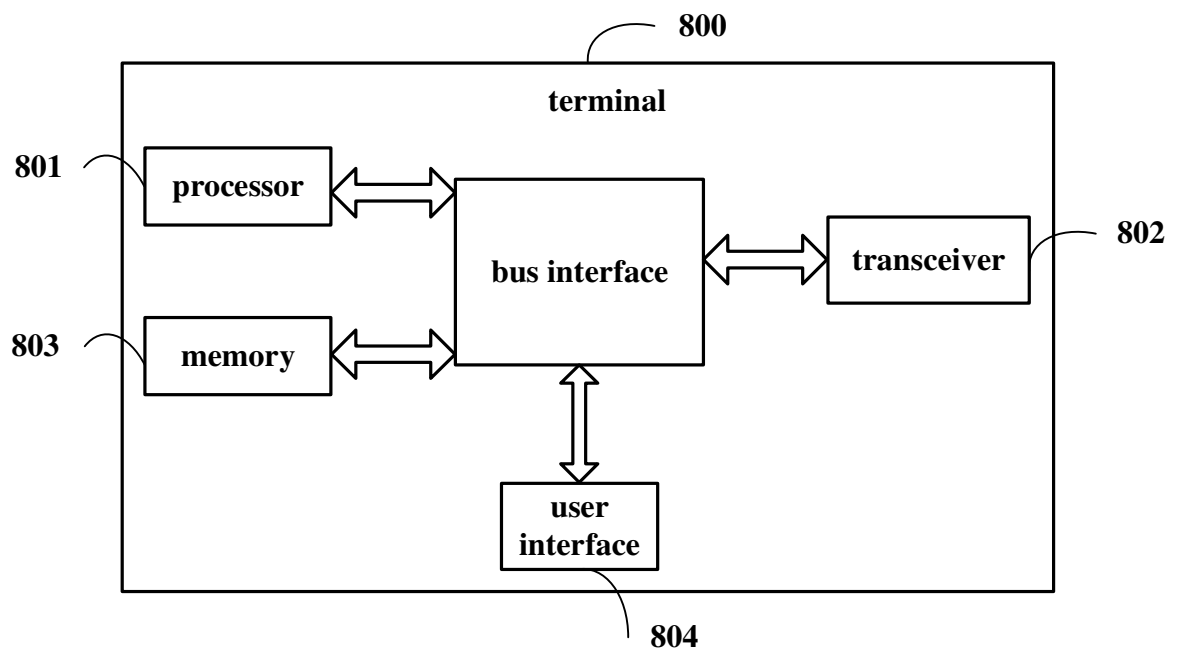


Fig.8

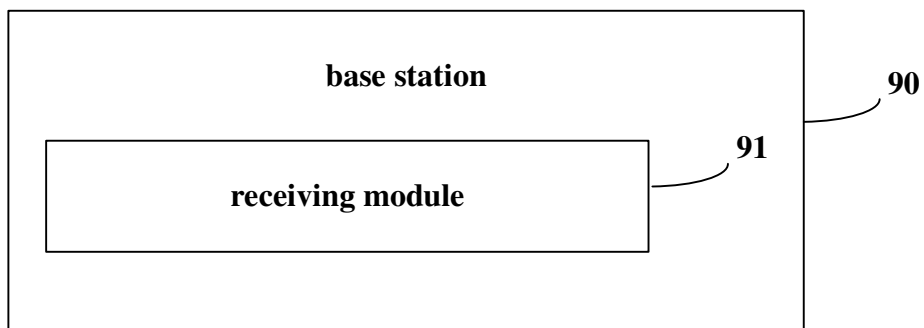


Fig.9

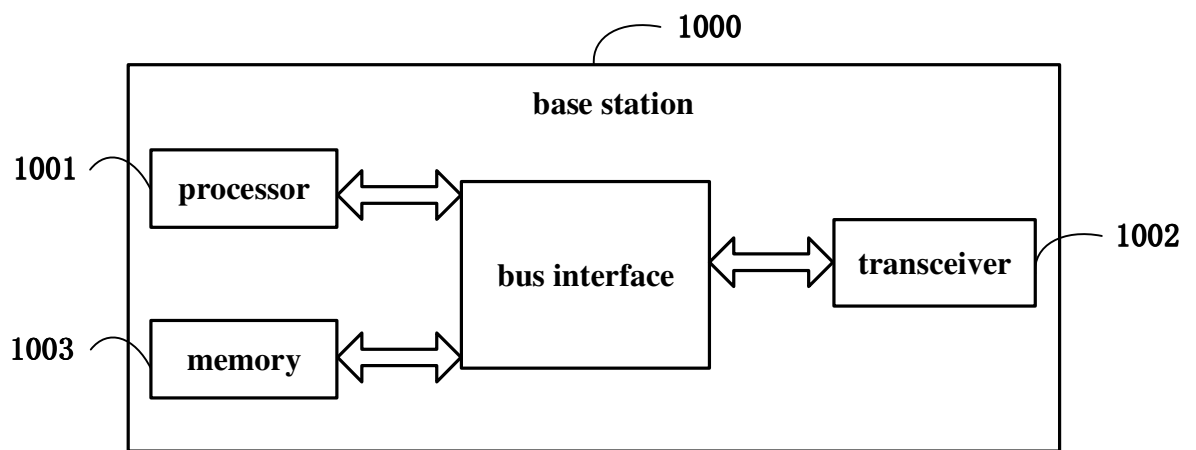


Fig.10