

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 January 2002 (17.01.2002)


PCT

(10) International Publication Number
WO 02/05272 A1

- (51) International Patent Classification⁷: **G11B 7/09** 6, NL-5656 AA Eindhoven (NL). KRISHNAN, Can-
niputhur, S., K., S.; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL).
- (21) International Application Number: **PCT/EP01/05632**
- (22) International Filing Date: 16 May 2001 (16.05.2001) (74) Agent: **DE JONG, Durk, J.**; Internationaal Octrooibureau
B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (national): CN, JP, KR, SG.
- (30) Priority Data: PCT/SG00/00088 23 June 2000 (23.06.2000) SG (84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRON-
ICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA
Eindhoven (NL).
- (72) Inventors: **YAK, Aik, S.**; Prof. Holstlaan 6, NL-5656
AA Eindhoven (NL). **CHIN, Wooi, L.**; Prof. Holstlaan
- Published:
— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: **DEVICE FOR RECORDING AND/OR REPRODUCING AN OPTICAL RECORD CARRIER**

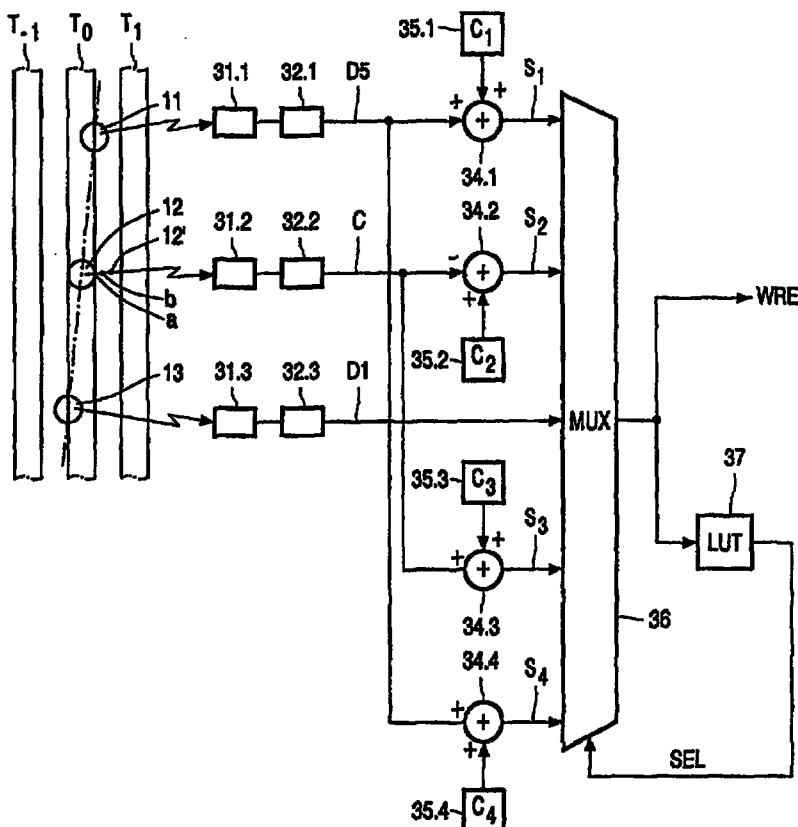

(57) Abstract: A device for recording and/or reproducing an optical record carrier (1), comprises an optical system for projecting a first, a second and a third optical beam at a first (11), a second (12) and a third spot (13) at the record carrier (1). The device further comprises detection elements primary position signals (D5, C, D1) which is indicative for an amount of radiation reflected by the record carrier at said those spots (11). The device further comprises signal processing means (34.1, ...34.4; 35.1,...35.4) for generating a plurality of secondary position signals (S1, S2, S3, S4) in response to the primary position signals (D5, C, D1). A selection element (36) selects one of the position signals (S1, S2, D1, S3, S4) as an output signal (WRE) in response to a selection signal (SEL). The selection signal (SEL) is derived from the output signal (WRE) of the selection element (36).

WO 02/05272 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.