



(51) International Patent Classification:
E01F 9/047 (2006.01)

(21) International Application Number:

PCT/MY2011/000009

(22) International Filing Date:

28 January 2011 (28.01.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PI2010000650 11 February 2010 (11.02.2010) MY

(71) Applicant (for all designated States except US): **JOHNSON & NICHOLSON (M) SDN BHD.** [MY/MY]; N°7 Wisma Johnson & Nicholson, Jalan 4/93, Taman Miharja, 55200 Kuala Lumpur (MY).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALAN CHEW, Hong Meng** [MY/MY]; C18-2 Abadi Villa, Taman Abadi Indah, 58100 Kuala Lumpur (MY). **CHEW, Joon Yip** [MY/MY]; C18-2 Abadi Villa, Taman Abadi Indah, 58100 Kuala Lumpur (MY).

(74) Agent: **LOK CHOON, Hong**; Suite 6.03, 6Th Floor, Wisma Mirama, Jalan Wisma Putra, 50460 Kuala Lumpur (MY).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEIGHT ADJUSTABLE SPEED BUMP

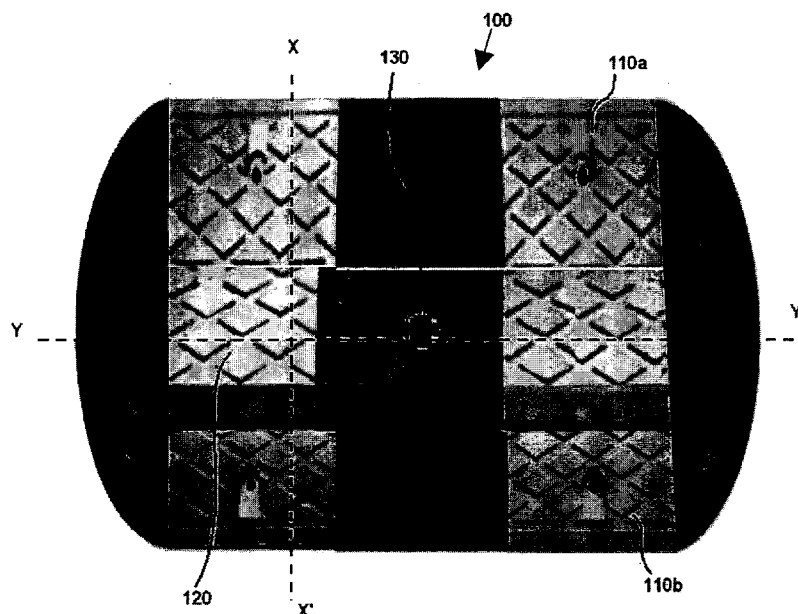


Fig. 1

(57) Abstract: The present invention relates to a height adjustable speed bump for controlling speed of vehicles when placed on roadways and for serving as a barrier when used for blocking restricted areas. The speed bump comprises a portable body (100) having a middle portion (120) and two side portions (110a, 110b). An elevation (290) of the body (100) is adjustable in dependence upon the usage as the speed bump or the barrier. Various arrangements are proposed for adjusting the elevation (290). A sensor is also provided on the body (100), for tracking the number of objects such as vehicles, passing over it. Methods of using the bump and barrier are thus proposed.

**Published:****(88) Date of publication of the international search report:**

15 December 2011

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*