



- (51) International Patent Classification:
H01L 49/00 (2006.01)
- (21) International Application Number:
PCT/SG2013/000150
- (22) International Filing Date:
17 April 2013 (17.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/637,020 23 April 2012 (23.04.2012) US
- (71) Applicant: NANYANG TECHNOLOGICAL UNIVERSITY [SG/SG]; 50 Nanyang Avenue, Singapore 639798 (SG).
- (72) Inventors: YOON, Soon Fatt; c/o Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798 (SG). XU, Dawei; c/o Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798 (SG). YEO, Chiew Yong; c/o Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798 (SG).
- (74) Agent: VIERING, JENTSCHURA & PARTNER LLP; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: APPARATUS AND METHOD FOR SEPARATING A STACKED ARRANGEMENT

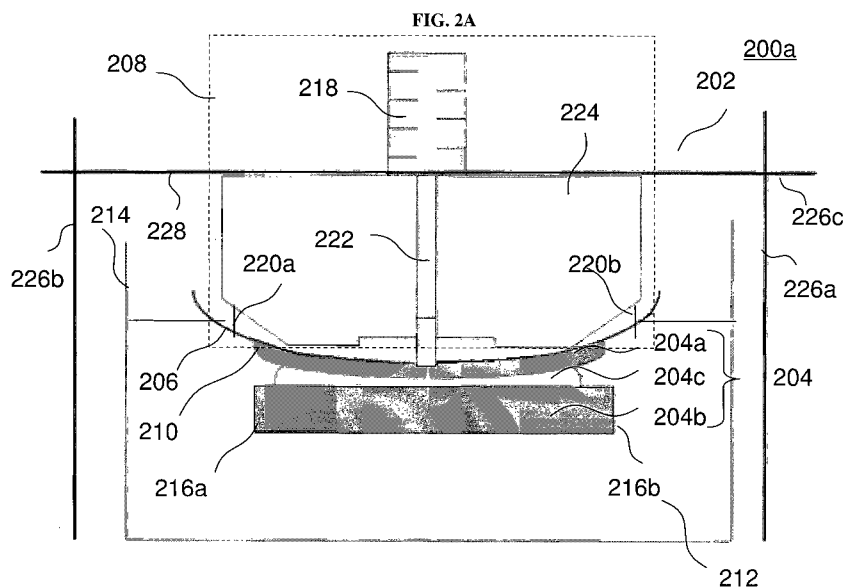

(57) Abstract: In various embodiments, an apparatus for separating a stacked arrangement including a first layer, a second layer and a release layer between the first layer and the second layer may be provided. The apparatus may include an attachment surface configured to suspend the stacked arrangement by attaching to the first layer. The apparatus may further include an actuating mechanism configured to form a curvature of the first layer by bending the attachment surface. The apparatus may also include a holder to hold an etchant for etching the release layer to separate the first layer from the second layer.