



(51) International Patent Classification:
B65D 5/38 (2006.01) **B65D 85/10** (2006.01)

(21) International Application Number:
PCT/EP2011/001455

(22) International Filing Date:
23 March 2011 (23.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10250570.8 25 March 2010 (25.03.2010) EP

(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).

(72) Inventors: **CHATELAIN, Lucas**; Eden Roc, 11, CH-1073 Savigny (CH). **BOURGOIN, Philippe**; Chemin du Crépon 12B, CH-1040 Echallens (CH). **NUETZI, Roger**; Länggasse 34, CH-4624 Harkingen (CH). **BARTH, Michael**; Bodenackerstrasse 8, CH-4410 Liestal (CH).

(74) Agent: **TAYLOR, Gillian, Claire**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SLIDE AND SHELL CONTAINER HAVING TAMPER EVIDENT SEAL

Figure 1

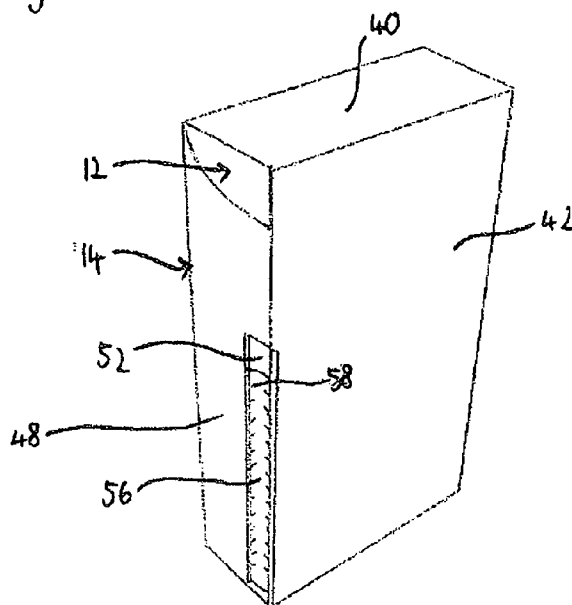

(57) Abstract: A slide and shell container (10) comprises an outer shell (14) and an inner slide (12) mounted within the outer shell. The outer shell (14) and the inner slide (12) are detachably connected to each other along one or more lines of weakness (54). Upon separation of the outer shell (14) and inner slide (12) along the one or more lines of weakness (54), the inner slide (12) becomes moveable within the outer shell (14) between a closed slide position and an open slide position. Preferably, the two or more lines of weakness (54) define an integral opening strip (56) which is separable from the container in order to separate the outer shell (14) and the inner slide (12).