


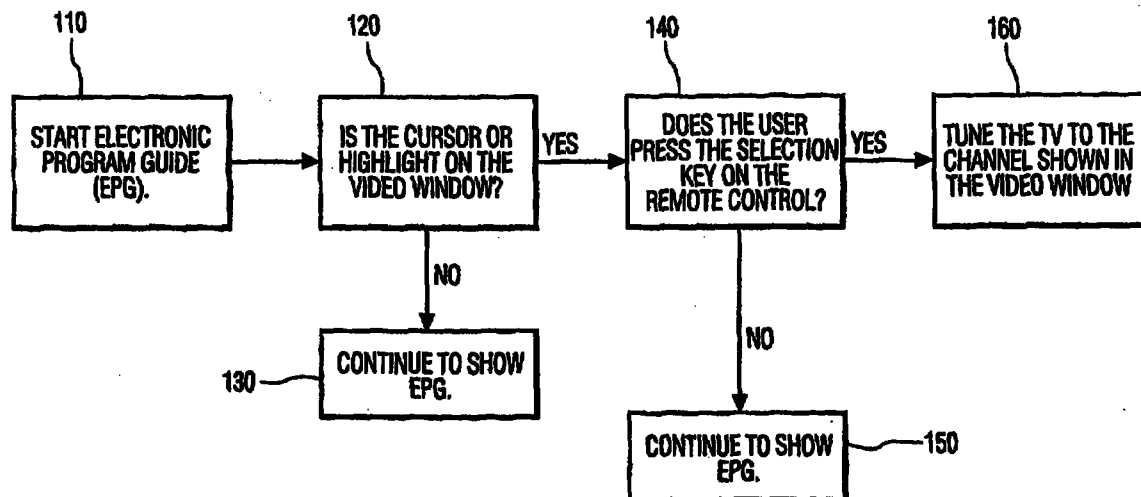

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 5/45	A1	(11) International Publication Number: WO 98/43419 (43) International Publication Date: 1 October 1998 (01.10.98)
(21) International Application Number: PCT/US97/22842 (22) International Filing Date: 15 December 1997 (15.12.97) (30) Priority Data: 60/042,706 21 March 1997 (21.03.97) US (71) Applicant (for all designated States except US): THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 10330 North Meridian Street, Indianapolis, IN 46290-1024 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): MORRISON, Hugh, Boyd [US/US]; 7454 Galloway Avenue, Indianapolis, IN 46250 (US). COMER, Robert, Skipworth [US/US]; 103 East 106th Street, Indianapolis, IN 46280 (US). WEHMEYER, Keith, Reynolds [US/US]; 6411 Columbia Circle, Fishers, IN 46038 (US). (74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation Inc., P.O. Box 5312, Princeton, NJ 08543 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: PICTURE IN AN ELECTRONIC PROGRAM GUIDE FOR A VIDEO PROCESSING SYSTEM

**(57) Abstract**

A video signal processing system and method provides a Picture-in-Guide (PiG) feature. An Electronic Program Guide (EPG) is displayed in a first image region of a display. The EPG comprises various selectable display areas ("News", "LANDS END"). In addition, a video image is shown in a second image region (210) of the display. The system includes user-selection means (325) for selecting the various display areas in the first image region and the second image region of the display. In response to the selection of the second image region of the display, a third image region appears on the display, replacing the first and the second image regions.