

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025042 A2

(51) International Patent Classification⁷:

E04B

(74) Agent: **BRYSON, Alan, C.**; Browning Bushman, P.C.,
5718 Westheimer, Suite 1800, Houston, TX 77057 (US).

(21) International Application Number:

PCT/US2003/029222

(22) International Filing Date:

15 September 2003 (15.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/410,369 13 September 2002 (13.09.2002) US

(71) Applicant (for all designated States except US): **DRIL-QUIP, INC.** [US/US]; 13550 Hempstead Highway, Houston, TX 77040 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: **REIMERT, Larry, E.** [US/US]; 6 Winner's Circle, Houston, TX 77024 (US).

[Continued on next page]

(54) Title: METHOD OF INSTALLING FLANGE ON TUBULAR BODY AT DESIRED ELEVATION

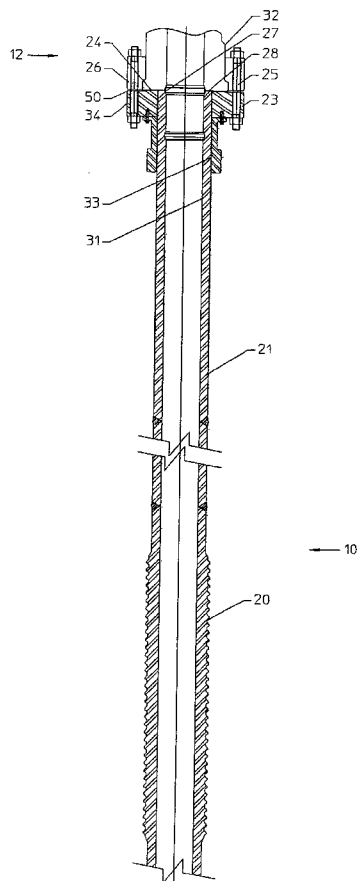

(57) Abstract: A method is disclosed of connecting first and second bodies in a mechanical assembly at a desired connection location. An elongate connection structure is provided on the first body. The first body is installed, extending at least to the desired connection location. The first body is axially reduced, to terminate around the desired axial connection location. A second body is connected relative to the desired connection location to the first body using the connection structure. Further subassemblies may be installed, and electrically insulated from other parts of the mechanical assembly to protect against corrosion.



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.