

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number
WO 03/064957 A1

(51) International Patent Classification⁷: **F41A 17/00**,
F41C 33/02

(21) International Application Number: PCT/US03/02625

(22) International Filing Date: 29 January 2003 (29.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/352,909 29 January 2002 (29.01.2002) US
60/352,910 29 January 2002 (29.01.2002) US

(71) Applicant and

(72) Inventor: **RASSIAS, John, N.** [US/US]; 7678 Cedarwood
Circle, Boca Raton, FL 33434 (US).

(74) Agents: **ZIESENHEIM, Frederick, B.** et al.; Webb
Ziesenheim Logsdon Orkin & Hanson, 700 Koppers
Building, 436 Seventh Avenue, Pittsburgh, PA 15219-1818
(US).


(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: HIGH SECURITY HOLSTER ASSEMBLY AND ENCLOSURE SYSTEM

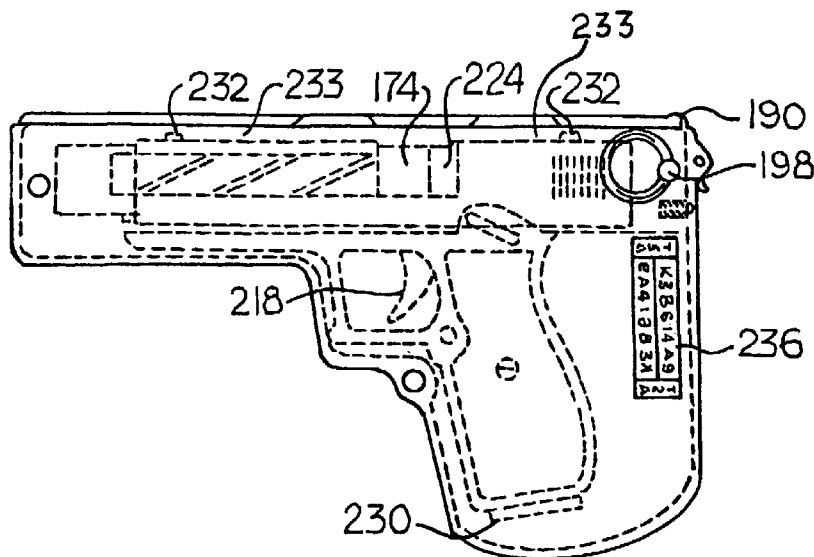

(57) **Abstract:** A holster assembly for a firearm includes a shroud (20, 92, 168) with a muzzle receiving space (31), a firearm holding member (100, 174, 246) and a bias activating assembly mounted in the shroud (20, 92, 168) for biasing the firearm into a stowed position against the holding member (100, 174, 246). A hood enclosure (166) is movable between open and closed positions. The hood enclosure (166) includes a pair of guide slots (188) within the shroud (20, 92, 168), a pivot pin (182) and a guide pin (186). The hood enclosure (166) may include an illumination device (238) mounted to the firearm, a hip mount platform (256) to mount a hip mount assembly (34), or a secondary stowage mount (270) to attach a magazine carrier (278), expandable baton carrier (266), etc.. The shroud (20, 92, 168) includes a detent (178) that receives a locking safety lever (146) of the firearm. An L-shaped slot (138, 106, 162) receives a projection from a handle portion (132), a take down button (88), a safety lever (158), or another side extending projection of the firearm.



WO 03/064957 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.