

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2024 年 2 月 29 日 (29.02.2024)



(10) 国际公布号
WO 2024/041616 A1

(51) 国际专利分类号:
H04W 4/80 (2018.01)

(21) 国际申请号: PCT/CN2023/114779

(22) 国际申请日: 2023 年 8 月 24 日 (24.08.2023)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202211028421.6 2022 年 8 月 25 日 (25.08.2022) CN

(71) 申请人: 无锡小天鹅电器有限公司(WUXI LITTLE SWAN ELECTRIC CO., LTD.) [CN/CN]; 中国江苏省无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。

(72) 发明人: 金明福(JIN, Mingfu); 中国江苏省无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。 苏忠城(SU, Zhongcheng); 中国江苏省无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。 薛晨曦(XUE, Chenxi); 中国江苏省

无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。 张怀洲(ZHANG, Huaizhou); 中国江苏省无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。 张劼(ZHANG, Jie); 中国江苏省无锡市国家高新技术产业开发区长江南路 18 号, Jiangsu 214028 (CN)。

(74) 代理人: 北京清亦华知识产权代理事务所(普通合伙)(TSINGYIHUA INTELLECTUAL PROPERTY LLC); 中国北京市海淀区阜成路 73 号裕惠大厦 B 座 806, Beijing 100142 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD,

(54) Title: NETWORK DISTRIBUTION METHOD AND APPARATUS FOR ELECTRICAL APPARATUS, AND COMPUTER-READABLE STORAGE MEDIUM

(54) 发明名称: 电器设备的配网方法和配网装置、计算机可读存储介质

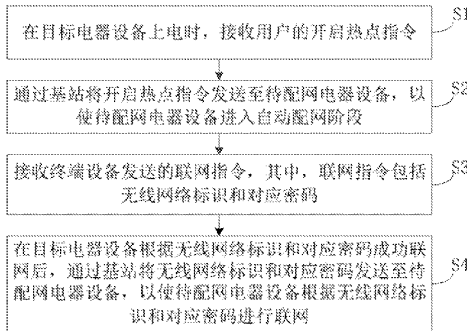


图 1

S1 When a target electrical apparatus is powered on, receive a hotspot enabling instruction from a user
S2 Send, via a base station, the hotspot enabling instruction to an electrical apparatus to be subjected to network distribution, so as to enable the electrical apparatus to be subjected to network distribution to enter an automatic network distribution phase
S3 Receive a network connection instruction sent by a terminal device, wherein the network connection instruction comprises a wireless network identifier and a corresponding password
S4 After the target electrical apparatus successfully connects to a network on the basis of the wireless network identifier and the corresponding password, send, via the base station, the wireless network identifier and the corresponding password to the electrical apparatus to be subjected to network distribution, such that the electrical apparatus to be subjected to network distribution connects to the network on the basis of the wireless network identifier and the corresponding password

(57) Abstract: A network distribution method and apparatus for an electrical apparatus, and a computer-readable storage medium. The method comprises: when a target electrical apparatus is powered on, receiving a hotspot enabling instruction from a user (S1); sending, via a base station, the hotspot enabling instruction to an electrical apparatus to be subjected to network distribution, so as to enable the electrical apparatus to be subjected to network distribution to enter an automatic network distribution phase (S2); receiving a network connection instruction sent by a terminal device, wherein the network connection instruction comprises a wireless network identifier and a corresponding password (S3); and after the target electrical apparatus successfully connects to a network on the basis of the wireless network identifier and the corresponding password, sending, via the base station, the wireless network identifier and the corresponding password to the electrical apparatus to be subjected to network distribution, such that the electrical apparatus to be subjected to network distribution connects to the network on the basis of the wireless network identifier and the corresponding password (S4).

[见续页]

SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明，要求每一种可提供的地区
保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ,
NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚
(AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR,
HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO,
PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN,
TD, TG)。

本国际公布:
— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 一种电器设备的配网方法和配网装置、计算机可读存储介质，其中，方法包括：在目标电器设备上电时，接收用户的开启热点指令(S1)；通过基站将开启热点指令发送至待配网电器设备，以使待配网电器设备进入自动配网阶段(S2)；接收终端设备发送的联网指令，其中，联网指令包括无线网络标识和对应密码(S3)；在目标电器设备根据无线网络标识和对应密码成功联网后，通过基站将无线网络标识和对应密码发送至待配网电器设备，以使待配网电器设备根据无线网络标识和对应密码进行联网(S4)。