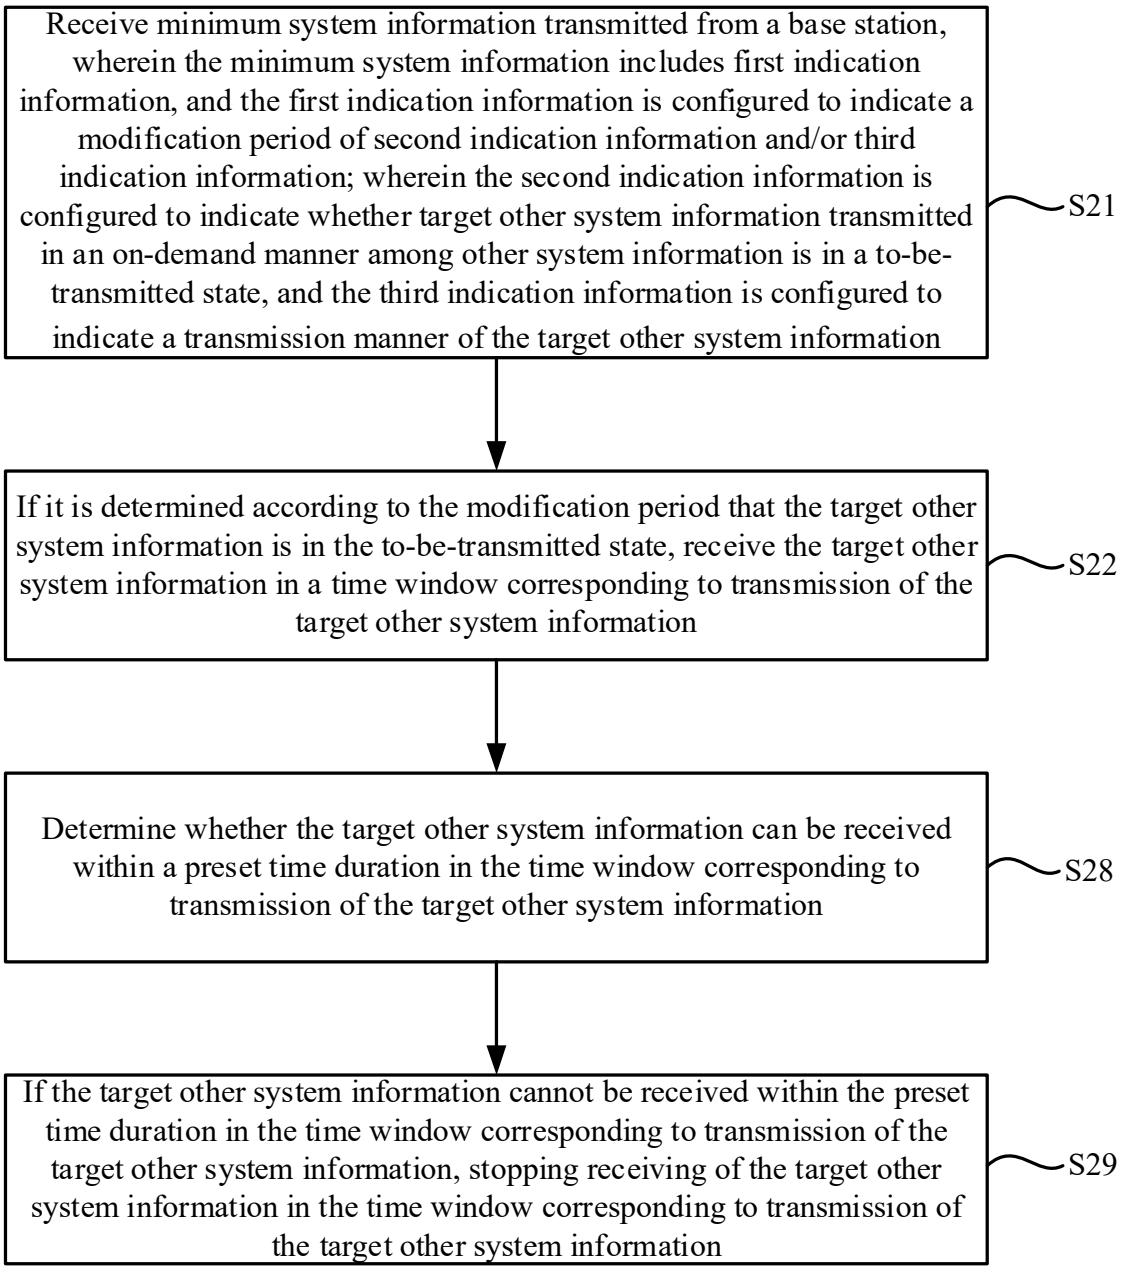

Receive minimum system information transmitted from a base station, wherein the minimum system information includes first indication information, and the first indication information is configured to indicate a modification period of second indication information and/or third indication information; wherein the second indication information is configured to indicate whether target other system information transmitted in an on-demand manner among other system information is in a to-be-transmitted state, and the third indication information is configured to indicate a transmission manner of the target other system information
S21
If it is determined according to the modification period that the target other system information is in the to-be-transmitted state, receive the target other system information in a time window corresponding to transmission of the target other system information
S22
Determine whether the target other system information can be received within a preset time duration in the time window corresponding to transmission of the target other system information
S28
If the target other system information cannot be received within the preset time duration in the time window corresponding to transmission of the target other system information, stopping receiving of the target other system information in the time window corresponding to transmission of the target other system information
S29

FIG. 5