

Description**BACKGROUND OF THE INVENTION**

5 (1) Field of the Invention

This invention relates to a polyether-ester amide and a transparent thermoplastic resin having a permanently antistatic property.

10 (2) Description of the Related Art

A polyether-ester amide synthesized from an amide-forming component, a poly(alkylene oxide) glycol component and a dicarboxylic acid component is widely used industrially as a thermoplastic elastic molding material. This polyether-ester amide is disclosed, for example, in U.S. Patent No. 3,044,987 and U.S. Patent
15 No. 3,455,734. This polyether-ester amide is crystalline and is not a polymer having a good transparency.

Polycarbonates and polymethacrylates are known as transparent resins. However, the technique of destaticizing polycarbonates has not been established. The technique of destaticizing polymethacrylates is known but is not widely used because the treatment is very expensive.

A resin comprising a rubbery polymer and a matrix resin, in which the refractive indexes of rubbery
20 polymer and matrix resin substantially agree, for example, a methyl methacrylate/butadiene/styrene copolymer (MBS resin) or a methyl methacrylate/acrylonitrile/butadiene/styrene copolymer (MABS resin), is widely used in various fields as a resin having an excellent impact resistance and transparency. Resins of this type have excellent mechanical strengths and optical characteristics but they have a poor antistatic property. Therefore, utilization of these resins for IC carrier cases and OA device covers in which prevention
25 of static is desired, and for various dust-proof articles and parts is difficult.

As a process for destaticizing a transparent resin, a process is known in which a hydrophilic rubbery polymer formed by copolymerising a conjugated diene and/or an alkyl ester of acrylic acid with a vinyl monomer having an alkylene oxide group is graft-polymerized with a vinyl monomer, the graft chain having
30 substantially the same refractive index as that of the polymer (see, for example, Japanese Unexamined Patent Publication No. 55-36,237). Although a practical antistatic effect can be attained according to this process, the process still has a problem in that since a special hydrophilic rubbery polymer is used, preparation is complicated, and the obtained resin has poor mechanical characteristics such as impact resistance and elastic modulus.

35 **SUMMARY OF THE INVENTION**




It is a primary object of the present invention to provide a polyether-ester amide having an excellent transparency that is not degraded with the lapse of time or by heat ageing, and excellent mechanical strengths.

40 Another object of the present invention is to provide an antistatic thermoplastic resin composition having a high permanent antistatic effect, a high impact resistance and a high transparency.

In accordance with one aspect of the present invention, there is provided a transparent polyether-ester amide having a relative viscosity, when measured in a 0.5 % solution of o-chlorophenol at 25°C, of 1.1 to 3.5 and which is formed by copolymerizing (a) an aminocarboxylic acid having at least 6 carbon atoms, a
45 lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which is synthesized from a diamine and a dicarboxylic acid, (b) at least one diol compound selected from compounds represented by the following formulae (I) through (III):

50

55

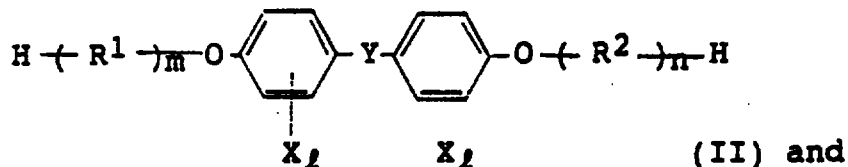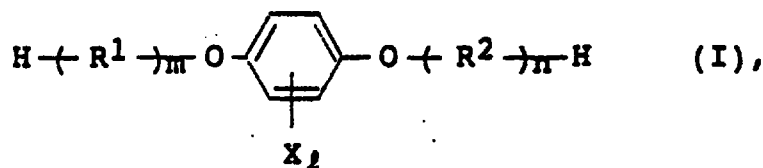

wherein R^1 and R^2 independently stand for at least one of an ethylene oxide group and a propylene oxide group, Y stands for a covalent bond, an alkylene group having 1 to 6 carbon atoms, an alkylidene group having 1 to 6 carbon atoms, a cycloalkylidene group having 7 to 17 carbon atoms, an arylalkylidene group having 7 to 17 carbon atoms, O, SO, SO_2 , CO, S, CF_2 , $\text{C}(\text{CF}_3)_2$ or NH, X stands for an alkyl group having 1 to 6 carbon atoms, a halogen, a sulfonic acid or a salt thereof, l is 0 or an integer of from 1 to 4, and m and n stand for an integer of from 1 to 15,

(c) at least one diol compound selected from a poly(alkyleneoxide)glycol having a number average molecular weight of at least 200 and a diol represented by the following general formula (IV):



wherein R^3 stands for an alkylene, alkylidene, cycloalkylidene or arylalkylidene group having 2 to 16 carbon atoms,

and (d) a dicarboxylic acid having 4 to 20 carbon atoms, wherein the content of the polyether-ester units is 10 to 90%, by weight, based on the weight of the polyether-ester amide.

In accordance with another aspect of the present invention, there is provided a transparent thermoplastic resin composition comprising (A) 1 to 40% by weight of the above-mentioned transparent polyether-ester amide, and (B) 99 to 1%, such as 99 to 60%, by weight of a graft copolymerization product formed by graft-polymerizing (a) 1 to 80 parts by weight of a rubbery polymer with (b) 99 to 20 parts by weight of a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected from a methacrylic acid ester and acrylic acid ester, and 0 to 60% by weight of a vinyl cyanide monomer, wherein the difference of the refractive index between the components (A) and (B) is not larger than 0.02.


DESCRIPTION OF THE PREFERRED EMBODIMENTS

The component (a) of the polyether-ester amide (A) is a polyamide-forming component of the polyether-ester amide, which is selected from an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms and a salt having at least 6 carbon atoms, which is synthesized from a diamine and a dicarboxylic acid.



As the aminocarboxylic acid, there can be mentioned ω -aminocaproic acid, ω -aminoenanthic acid, ω -aminocaprylic acid, ω -aminopelargonic acid, ω -aminocapric acid, 11-aminoundecanoic acid and 12-aminododecanoic acid. As the lactam, there can be mentioned caprolactam, ϵ -enantholactam, caprylolactam and laurilactam. As the diamine, there can be mentioned hexamethylene-diamine. As the dicarboxylic acid, there can be mentioned adipic acid, sebacic acid, decanedicarboxylic acid and isophthalic acid. As the diamine/dicarboxylic acid salt, there can be mentioned hexamethylene-diamine adipate, hexamethylene-diamine sebacate, hexamethylene-diamine decanedicarboxylate and hexamethylene-diamine isophthalate. Caprolactam, 11-aminoundecanoic acid, 12-aminododecanoic acid and hexamethylene-diamine adipate are especially preferred as the component (a) of the polyether-ester amide.

The above-mentioned component (a), that is, an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which is synthesized from a diamine and a dicarboxylic acid, is used in an amount such that the content is 10 to 90% by weight, preferably 20 to 80% by weight, based on the weight of the polyether-ester amide. If the content of the component (a) is lower than 10% by weight, the mechanical properties of the polyether-ester amide are not satisfactory and if the content of the component (a) exceeds 90% by weight, the transparency of the polyether-ester amide is poor.

The diol compound (b) used for the preparation of the polyether-ester amide (A) of the present invention is selected from compounds represented by the following formulae (I) through (III):



X_2

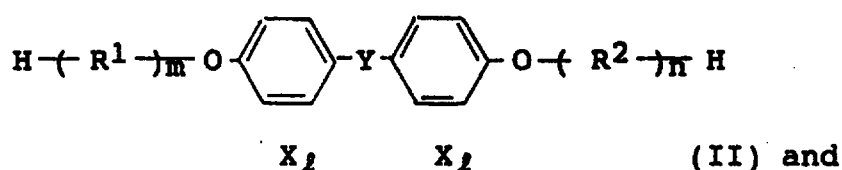

wherein R^1 and R^2 independently stand for at least one of an ethylene oxide group and a propylene oxide group, Y stands for a covalent bond, an alkylene group having 1 to 6 carbon atoms, an alkylidene group having 1 to 6 carbon atoms, a cycloalkylidene group having 7 to 17 carbon atoms, an arylalkylidene group having 7 to 17 carbon atoms, O, SO, SO_2 , CO, S, CF_2 , $\text{C}(\text{CF}_3)_2$ or NH, X stands for hydrogen, an alkyl group having 1 to 6 carbon atoms, a halogen, a sulfonic acid or a salt thereof, ℓ is 0 or an integer of from 1 to 4, and m and n stand for an integer of from 1 to 15.

In the compounds represented by the general formulae (I) through (III), in view of the polymerizability, preferably at least one of R^1 and R^2 is an ethylene oxide group. Furthermore, if m and n stand for an integer of from 1 to 15, a good antistatic property and a good transparency are attained, and if m and n stand for an integer of from 1 to 5, an especially high transparency is attained. From the viewpoint of the polymerizability and transparency, compounds represented by the general formula (II) are preferred.

As specific examples of the diol compound (b), there can be mentioned an ethylene oxide and/or propylene oxide adduct of bisphenol A, an ethylene oxide and/or propylene oxide adduct of 2,2-bis(4,4'-hydroxycyclohexyl)propane, an ethylene oxide and/or propylene oxide adduct of tetrabromobisphenol A, an ethylene oxide and/or propylene oxide adduct of dimethylbisphenol A, an ethylene oxide and/or propylene oxide adduct of tetramethylbisphenol A, an ethylene oxide and/or propylene oxide adduct of 2,2-bis(sodium 4,4'-hydroxyphenyl-3,3'-sulfonate)-propane, an ethylene oxide and/or propylene oxide adduct of bisphenol S, an ethylene oxide and/or propylene oxide adduct of dimethylbisphenol S, an ethylene oxide and/or propylene oxide adduct of tetramethylbisphenol S, an ethylene oxide and/or propylene oxide adduct of 4,4'-(hydroxy)-bisphenyl, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)sulfide, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)sulfoxide, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)difluoromethane, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)hexafluoropropane, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)ether, an ethylene oxide and/or propylene oxide adduct of bis(4-hydroxyphenyl)amine, an ethylene oxide and/or propylene oxide adduct of 2,2-bis(4-hydroxyphenyl)ethane, an ethylene oxide and/or propylene oxide adduct of 1,1-bis(4-hydroxyphenyl)cyclohexane, an ethylene oxide and/or propylene oxide adduct of 4,4'-dihydroxybenzophenone, an ethylene oxide and/or propylene oxide adduct of hydroquinone, an ethylene oxide and/or propylene oxide adduct of 1,4-dihydroxycyclohexane, an ethylene oxide and/or propylene oxide adduct of sodium 1,4-dihydroxybenzene-sulfonate, an ethylene oxide and/or propylene oxide adduct of dihydroxynaphthalene, and block copolymers thereof.

An ethylene oxide adduct of hydroquinone, an ethylene oxide adduct of bisphenol A, an ethylene oxide adduct of bisphenol S, an ethylene oxide adduct of dihydroxyphthalene and block copolymers thereof are preferred as the diol compound, and in view of the polymerizability and from the economical viewpoint, an ethylene oxide adduct of bisphenol A and a block copolymer thereof are especially preferred.

These diol compounds (b) can be used singly or in the form of a mixture of two or more thereof. The copolymerization ratio of the diol compound (b) is not particularly critical, but in view of the transparency, antistatic effect and tensile characteristics, preferably the content of the diol compound (b) is 0.1 to 60% by weight based on the polyether-ester units.

The diol compound (c) used for the preparation of the polyether-ester amide (A) of the present invention is a poly(alkylene oxide)glycol and/or a diol compound represented by the formula (IV):



wherein R^3 stands for an alkylene, alkylidene, cycloalkylidene or arylalkylidene group having 2 to 16 carbon atoms.

As specific examples of the diol compound (c), there can be mentioned ethylene glycol, 1,3-propanediol, 1,2-propanediol, 1,4-butanediol, 1,6-hexanediol, 1,10-decanediol, neopentyl glycol, 1,2-cyclohexanediol, 1,3-cyclohexanediol, 1,4-cyclohexanediol, 1,4-cyclohexanedimethanol, 1,3-cyclohexanedimethanol, p-xylylene glycol, m-xylylene glycol, polyethyleneglycol, poly(1,2-propylene oxide)glycol, poly(1,3-propylene oxide)glycol, poly(tetramethylene oxide)glycol, poly(hexamethylene oxide)glycol, ethylene oxide/propylene oxide block or random copolymers, and ethylene oxide/tetrahydrofuran block or random copolymers. Among them, poly(alkylene oxide)glycols such as polyethyleneglycol, poly(propylene oxide)glycol and poly(tetramethylene oxide)glycol, p-xylylene glycol and 1,4-cyclohexanedimethanol are preferably used. Polyethylene glycol and poly(propylene oxide)glycol are especially preferred because the resulting polyether-ester amide has excellent hydrophilic property and antistatic effect. From the viewpoint of the polymerizability and antistatic effect, use of polyethylene-glycol is particularly especially preferred. Moreover, poly(alkylene oxide)glycols having number average molecular weight of 200 to 6,000, especially 200 to 4,000, are preferred because of the high transparency and excellent antistatic effect obtained therefrom. If the number average molecular weight is lower than 200, the mechanical properties of the obtained polyether-ester amide are not satisfactory, and if the number average molecular weight exceeds 4,000, the transparency of the polyether-ester amide is poor.

As the dicarboxylic acid (d) having 4 to 20 carbon atoms, which forms polyether-ester amide units together with the diol components (b) and (c), there can be mentioned aromatic dicarboxylic acids such as terephthalic acid, isophthalic acid, phthalic acid, naphthalene-2,6-dicarboxylic acid, naphthalene-2,7-dicarboxylic acid, diphenyl-4,4'-dicarboxylic acid, diphenoxyethanedicarboxylic acid and sodium 3-sulfoisophthalate; alicyclic dicarboxylic acids such as 1,4-cyclohexanedicarboxylic acid, 1,2-cyclohexanedicarboxylic acid and dicyclohexyl-4,4'-dicarboxylic acid; and aliphatic dicarboxylic acids such as succinic acid, oxalic acid, adipic acid, sebacic acid, dodecanedioic acid (decanedicarboxylic acid) and dodecane dicarboxylic acid. In view of the polymerizability, hue, transparency and physical properties, terephthalic acid, isophthalic acid, 1,4-cyclohexanedicarboxylic acid, sebacic acid, adipic acid and decanedicarboxylic acid are preferably used.

The diol compound (b) and the diol compound (c) are reacted with the dicarboxylic acid (d) at a molar ratio of 1/1, but these components are supplied at a charge molar ratio of 1/1 or the charge molar ratio is appropriately changed from 1/1 according to the kind of the dicarboxylic acid used. The content of the polyether-ester derived from the components (b), (c) and (d) is 10 to 90% by weight, preferably 20 to 80% by weight, especially preferably 30 to 70% by weight, based on the polyether-ester amide. If the content of the polyether-ester is lower than 10% by weight, the transparency of the polyether-ester amide is not satisfactory, and if the content of the polyether-ester exceeds 90% by weight, the mechanical properties of the polyether-ester amide are poor.

By appropriately selecting the polymerization components and composition, a transparent polyether-ester amide having a low crystallinity can be obtained.

The polymerization process for the preparation of the polyether-ester amide of the present invention is not particularly critical. For example, there can be adopted (1) a process in which the component (a), that is, an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which is synthesized from a diamine and a dicarboxylic acid, is reacted with the dicarboxylic acid (d) to form a polyamide prepolymer having carboxylic acid terminal groups. The average molecular weight of this polyamide prepolymer can be changed in a broad range, but an average molecular weight of 300 to 15,000, especially 500 to 5,000, is preferred, and the so-formed polyamide

prepolymer is reacted with the diol compound (b) and the diol compound (c) under vacuum; (2) a process in which the above-mentioned components (a), (b), (c) and (d) are charged in a reactor, they are reacted at a high temperature under a high pressure in the presence or absence of water to form an carboxylic acid-terminated polyamide prepolymer and reaction is further advanced under normal pressure or under vacuum, and (3) a process in which the components (a), (b), (c) and (d) are charged in a reactor, the mixture is heated and stirred in an N₂ current to form a transparent homogeneous liquid mixture, and reaction is advanced under vacuum. The term "under vacuum" as used herein denotes that the reaction is carried out under a pressure lower than about 15 mmHg (2000 Pa), preferably lower than 5 mmHg (666.7 Pa), especially preferably lower than 1 mmHg (133.3 Pa).

In the polymerization reaction for formation of the polyether-ester amide, there are preferably used titanium catalysts such as tetraalkyl titanates, for example, tetrabutyl titanate, and titanium metal salts of oxalic acid, for example, potassium titanium oxalate; tin catalysts such as dibutyltin oxide, dibutyltin laurate and monobutyltin oxide; zirconium tetraalkoxide catalysts such as zirconium tetrabutoxide and zirconium isopropoxide; hafnium tetraalkoxide catalysts such as hafnium tetraethoxide; lead catalysts such as lead acetate; germanium catalysts such as germanium oxide; and mixtures of the foregoing catalysts with antimony catalysts such as antimony trioxide, but the kind of the catalyst is not particularly critical.

If the hue is changed according to the polymerization conditions, the polyether-ester amide can be stabilized by incorporation of a small amount of a phosphorus compound, for example, trimethyl phosphate.

A polyfunctional compound such as trimesic acid, glycerol or pentaerythritol may be incorporated in the polymerization reaction mixture, so long as gelation does not occur. This polyfunctional compound can be utilized as a viscosity increaser.

The time required for the polycondensation is 30 minutes to 10 hours from the point of initiation of reduction of the pressure, and the polymerization time can be adjusted to an appropriated time of 1 to 5 hours by controlling the polymerization conditions. The polymerization time depends mainly on the kind and copolymerization ratio of the poly(alkylene oxide)glycol, but the polymerization time must be long enough to increase the polymerization degree to a level suitable for a molding elastomer material intended in the present invention.

The polymerization degree of the polyether-ester amide is such that the relative viscosity (η_r) measured in a 0.5% solution in o-chlorophenol at 25°C is 1.1 to 3.5, preferably 1.5 to 2.5. If the polymerization degree is outside this range, the mechanical properties and moldability are not satisfactory.

Heat-resistant and weathering stabilizers such as antioxidants, thermal decomposition-preventing agents, and ultraviolet absorbers can be incorporated in the polyether-ester amide of the present invention before or after the polymerization. Agents for modifying the properties of the product, such as a hydrolysis-resisting modifier, a colorant, an electrically conducting agent, a flame retardant, reinforcer, a filler, a lubricant, a nucleating agent, a release agent, a plasticizer, an adhesive assistant, and a tackifier, may be incorporated according to the intended use.

The antistatic effect can be enhanced by incorporating a metal salt of a sulfonic acid or an anionic, cationic surface active agent.

The polyether-ester amide of the present invention can be formed into an elastic shaped article by any shaping method adopted for thermoplastic plastics and rubbers. For example, there can be mentioned an injection molding method, an extrusion shaping method, a compression molding method, a blow molding method, a calendaring method and a coating method. The so-obtained polyether-ester amide shaped article has a good transparency, and the transparency can be further improved by appropriately adjusting the copolymerization ratio or shaping conditions.

The polyether-ester amide of the present invention can be used as an elastomer as it is. Furthermore, the polyether-ester amide may be mixed with various resins and used in the form of resin compositions. The kind of the resin to be mixed is not particularly critical. For example, there can be mentioned styrene resins such as ABS resins, AES resins, AAS resins, MBS resins, impact-resistant polystyrene, polystyrene and styrene/acrylonitrile copolymers, and polymethyl methacrylate, polycarbonates, polyamides, polyethylene terephthalate, polybutylene terephthalate, polyacetal, polyvinyl chloride, polyethylene, polypropylene and polyphenylene-ether resins.

Preferably, the polyether-ester amide of the present invention is blended with a graft copolymerization product (B) formed by graft-polymerizing (a) a rubbery polymer with (b) the specified monomer mixture. A rubbery polymer having a glass transition temperature lower than 0°C is preferably used as the rubbery polymer (a) as the constituent of the graft copolymerization product (B). More specifically, there can be mentioned diene type rubbers such as polybutadiene, polystyrene-butadiene, polyacrylonitrile-butadiene and polybutyl acrylate-butadiene, acrylic rubbers such as polyisoprene, polychloroprene polybutyl acrylate and an ethylene/propylene/diene monomer terpolymer. The rubbery polymer (a) is selected so that the

difference of the refractive index between the polyether-ester amide (A) and the graft copolymerization product (B) is not larger than 0.02, preferably not larger than 0.01, especially preferably not larger than 0.005. If the difference of the refractive index therebetween exceeds 0.02, the transparency of the resulting composition is not satisfactory.

- 5 The monomer mixture (b) to be grafted onto the rubbery polymer (a) comprises 100 to 40% by weight of an aromatic vinyl monomer and a methacrylic acid ester and/or an acrylic acid ester, and 0 to 60% by weight of a vinyl cyanide monomer.

As the methacrylic or acrylic acid ester monomer as the constituent (b) of the graft copolymerization product (B), there can be mentioned methyl, ethyl, propyl, n-butyl and i-butyl esters of acrylic acid and methacrylic acid. As the aromatic vinyl monomer, there can be mentioned styrene, α -methylstyrene, vinyltoluene, and p-t-butylstyrene. The proportion of the methacrylic and/or acrylic acid ester to the aromatic vinyl monomer is preferably from 99:1 to 10:90, by weight.

As the vinyl cyanide monomer, there can be mentioned acrylonitrile and methacrylonitrile.

- Furthermore, at least one other copolymerizable monoethylenically unsaturated monomer, e.g., maleimide monomers such as maleimide, N-methylmaleimide, N-ethylmaleimide, and N-phenylmaleimide, and vinyl monomers such as N-vinylpyrrolidone can be copolymerized according to need.

The monomers of the monomer mixture (b) are preferably selected so that the difference of the refractive index between the rubbery polymer (a) and the polymer obtained by polymerizing alone the vinyl monomer mixture (b) is not larger than 0.02, especially not larger than 0.01, particularly especially not larger than 0.005.

The refractive index of the matrix resin composed solely of the monomer mixture can be calculated by a theoretical formula or by measuring the refractive index of a polymer formed by polymerizing alone the monomer mixture having the composition of the matrix resin.

- The graft copolymerization product (B) is obtained by graft-polymerizing 1 to 80 parts by weight, preferably 10 to 70 parts by weight, of the rubbery polymer (a) with 99 to 20 parts by weight, preferably 90 to 30 parts by weight, of the monomer mixture (b) comprising 100 to 40% by weight of the aromatic vinyl monomer and the methacrylic and/or acrylic acid ester monomer, and 0 to 60% by weight of the vinyl cyanide monomer according to a known polymerization process, for example, a process in which the monomer mixture is emulsion-graft-polymerized in the presence of a latex of the rubbery polymer while continuously feeding a polymerization initiator and an emulsifier.

If the amount of the rubbery polymer in the graft copolymerization product is smaller than 1 part by weight, the obtained composition has a poor impact resistance. If the amount of the rubbery polymer exceeds 80 parts by weight, the dispersion state of the rubbery polymer is bad and the transparency and impact resistance are not satisfactory.

- The graft copolymerisation product (B) may be in the form of a copolymerization product obtained by copolymerising a part of the above-mentioned monomer mixture, optionally together with other monoethylenically unsaturated monomer copolymerizable with the monomer mixture, for example, a maleimide monomer such as maleimide, N-methylmaleimide, N-ethylmaleimide or N-phenylmaleimide, or N-vinylpyrrolidone.

As pointed out hereinbefore, the difference of the refractive index between the polyether-ester amide (A) and the graft copolymerization product (B) is not larger than 0.02, preferably not larger than 0.01, especially preferably not larger than 0.005. If the difference of the refractive index exceeds 0.02, the transparency of the composition is not satisfactory.

- The composition of the present invention comprising the polyether-ester amide (A) and the rubbery polymer (B) may further comprise (C) a modified vinyl polymer containing at least one member selected from the group consisting of a carboxyl group, an epoxy group, an amino group and a substituted amino group. This polymer (C) is obtained by homopolymerizing one monoethylenically unsaturated monomer or copolymerizing at least two monoethylenically unsaturated monomers, and has at least one member selected from the group consisting of a carboxyl group, an epoxy group, an amino group and a substituted amino group in the molecule. This polymer is hereinafter referred to as "modified vinyl polymer". The carboxyl group may be an anhydrous carboxyl group. The content of the carboxyl, epoxy, amino or substituted amino group may be very low, or the amount of the carboxyl group, epoxy group, amino group or substituted amino group may be large, so long as the performances thereof as the resin are satisfactory.


If the modified vinyl polymer (C) contains at least one of the carboxyl, epoxy, amino or substituted amino group on the average in one molecule, the modified vinyl polymer (C) can improve the compatibility between the components (A) and (B) while maintaining the transparency and antistatic effects at high levels.

If the sum of the carboxyl, epoxy, amino and substituted amino groups contained in the modified vinyl monomer (C) is 5×10^{-7} to 0.5 mole per 100 g of the total resin composition, the compatibility between the

components (A) and (B) is greatly improved and the stress at break is increased, and interlaminar separation does not occur.

The process for introducing the carboxyl group into the modified vinyl polymer (C) is not particularly critical and, for example, there can be adopted (1) a process in which a monoethylenically unsaturated monomer containing a carboxyl group or an anhydrous carboxyl group, such as acrylic acid, methacrylic acid, maleic acid, monoethyl maleate, maleic anhydride, phthalic acid or itaconic acid, is copolymerized with another monoethylenically unsaturated monomer, (2) a process in which monoethylenically unsaturated monomers are copolymerized in the presence of a polymerization initiator having a carboxyl group, such as γ,γ' -azobis(γ -cyanovaleric acid), α,α' -azobis(α -cyanoethyl-p-benzoic acid) or succinic acid peroxide, and/or a polymerization degree-adjusting agent having a carboxyl group, such as thioglycolic acid, α -mercaptopropionic acid, β -mercaptopropionic acid, α -mercaptoisobutyric acid, 2-, 3- or 4-mercaptobenzoic acid, and (3) a process in which a homopolymer or copolymer of a methacrylic or acrylic acid ester such as methyl methacrylate or butyl acrylate is saponified with an alkali.

The process for introducing an epoxy group in the modified vinyl polymer (C) is not particularly critical and, for example, there can be adopted a process in which a compound represented by the following general formula (V):



wherein R stands for a hydrogen atom, a lower alkyl group having 1 to 6 carbon atoms, or a lower alkyl group having 1 to 6 carbon atoms, substituted with a glycidyl ester group, such as glycidyl acrylate, glycidyl methacrylate, glycidyl ethacrylate or glycidyl itaconate, is copolymerized with another monoethylenically unsaturated monomer.

The process for introducing an amino or substituted amino group into the modified vinyl monomer (C) is not particularly critical, and for example, there can be adopted (1) a process in which a monoethylenically unsaturated monomer having at least one functional group selected from the group consisting of amino and substituted amino groups represented by the following formula (VI):



wherein R^3 stands for a hydrogen atom, a methyl group or an ethyl group, and R^4 stands for a hydrogen atom, an alkyl group having 1 to 12 carbon atoms, an alkanoyl group having 2 to 12 carbon atoms, a phenyl or cycloalkyl group having 6 to 12 carbon atoms or a derivative thereof,

is copolymerized with another monoethylenically unsaturated monomer, and (2) a process in which a monoethylenically unsaturated monomer is homopolymerized or monoethylenically unsaturated monomers are copolymerized in the presence of a chain transfer agent and/or an initiator, which has at least one functional group selected from the group consisting of amino and substituted amino groups represented by the above-mentioned general formula (VI) and mineral acid salts thereof.

As specific examples of the monoethylenically unsaturated monomer having at least one functional group selected from the above-mentioned amino and substituted amino groups, there can be mentioned alkyl ester derivatives of acrylic acid and methacrylic acid, such as aminoethyl acrylate, propylaminoethyl acrylate, methylaminoethyl methacrylate, ethylaminopropyl methacrylate, phenylaminoethyl methacrylate and cyclohexylaminoethyl methacrylate; vinylamine derivatives such as N-vinyldiethylamine and N-acetylvinyl amine; allylamine derivatives such as allylamine, methallylamine and N-methylallylamine; methacrylamide and acrylamide derivatives such as acrylamide, methacrylamide and N-methylacrylamide; and aminostyrene derivatives such as p-amino-styrene.

As specific examples of the chain transfer agent having the above-mentioned functional group, there can be mentioned mercaptomethylamine, β -mercaptomethylamine, γ -mercaptopropylamine, N-(β -mercaptoethyl)-N-methylamine, N-(β -mercaptoethyl)-N-ethylamine, N-(β -mercaptoethyl)-N-phenylamine, N-(β -mercaptoethyl)-N-cyclohexylamine, bis-(4-aminophenyl)disulfide, bis-(2-aminophenyl)disulfide, bis-(3-aminophenyl)disulfide, p-mercaptoaniline, o-mercaptoaniline, m-mercaptoaniline, and hydrochlorides thereof.

As specific examples of the initiator having the above-mentioned functional group, there can be mentioned α,α' -azobis(γ -amino- α,γ -dimethylvaleronitrile), α,α' -azobis(γ -methylamino- α,γ -dimethylvaleronitrile), α,α' -azobis(γ -ethylamino- α,γ -dimethylvaleronitrile), α,α' -azobis(γ -propylamino- α,γ -dimethylvaleronitrile), α,α' -azobis(γ -diethylamino- α,γ -dimethylvaleronitrile), α,α' -azobis(γ -dimethylamino- α -dimethylvaleronitrile), α,α' -azobis(γ -dipropylamino- α,γ -dimethylvaleronitrile) and p-aminobenzoyl peroxide.

The monoethylenically unsaturated monomer to be used for formation of the modified vinyl polymer (C) is not particularly critical. For example, there can be mentioned aromatic vinyl monomers such as styrene, α -methylstyrene and vinyltoluene; vinyl cyanide monomers such as acrylonitrile and methacrylonitrile; methacrylic and acrylic acid ester monomers such as methyl methacrylate, ethyl methacrylate, methyl acrylate and butyl acrylate; α - β -unsaturated carboxylic acids and anhydrides thereof such as methacrylic acid, acrylic acid, maleic acid and maleic anhydride; maleimide monomers such as maleimide, N-methylmaleimide and N-phenylmaleimide; olefin monomers such as ethylene and propylene; and vinyl monomers such as vinyl chloride, vinyl acetate and butadiene. These monomers are appropriately chosen according to the object and are used alone or in the form of a mixture of two or more thereof. In view of the mechanical properties of the obtained resin composition, preferably an aromatic vinyl monomer such as styrene, a methacrylic or acrylic acid ester monomer such as methyl methacrylate, a vinyl cyanide monomer such as acrylonitrile or a maleimide monomer such as N-phenylmaleimide is used.

If necessary, a rubbery polymer such as polybutadiene, an acrylonitrile/butadiene copolymer (NBR), a styrene/butadiene copolymer (SBR), polybutyl acrylate or an ethylene/propylene/diene rubber (EPDM) can be used in combination with the above-mentioned monoethylenically unsaturated monomer.

The process for the preparation of the modified vinyl polymer (C) is not particularly critical, and ordinary processes such as a bulk polymerization process, a solution polymerization process, a suspension polymerization process, an emulsion polymerization process and a bulk/suspension polymerization process can be adopted.

Furthermore, a polymer obtained by grafting at least one member selected from the above-mentioned carboxyl, epoxy, amino and substituted amino groups to the graft copolymerization product (B) may be included in the composition of the present invention.

In the production of the modified vinyl polymer (C), the monoethylenically unsaturated monomer is selected so that the difference of the refractive index of the modified vinyl polymer (C) from those of the polyether-ester amide (A) and the graft copolymerization product (B) is not larger than 0.02, preferably not larger than 0.01, especially preferably not larger than 0.005. If this difference of the refractive index exceeds 0.02, the transparency of the resulting resin composition becomes poor.

The composition of the present invention, which comprises the polyether-ester amide (A), the rubbery polymer (B) and optionally comprising the optional modified vinyl polymer (C), may further comprise less than 98% by weight, based on the total composition, of (D) a copolymer derived from a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected from a methacrylic acid ester and an acrylic acid ester, 0 to 60% by weight of a vinyl cyanide monomer and 0 to 60% by weight of other copolymerizable monoethylenically unsaturated monomer.

The copolymer (D) may be derived either from the same monomer mixture as the monomer mixture (b) used for the preparation of the graft copolymerization product (B), or from part of the same monomer mixture. As the aromatic vinyl monomer, the methacrylic acid ester, the acrylic acid ester the vinyl cyanide monomer, and the other copolymerizable monoethylenically unsaturated monomer, there can be mentioned those which are listed with regard to the monomer mixture (b) for the graft copolymerization product (B).

The monomers used for the preparation of the copolymer (D) are preferably selected so that the difference of the refractive index among the components (A), (B), (D) and, when present, (C), is not larger than 0.02, especially not larger than 0.01, particularly especially not larger than 0.005. The amount of the copolymer (D) may be appropriately varied depending upon the intended product. The weight ratio of component (B)/component (D) may be in the range 2/98 to 99/1.

The above-mentioned polymers (A), (B), (C) and (D) may be mixed to form a resin composition comprising 1 to 40% by weight, preferably 3 to 30% by weight, of the polyether-ester amide (A), 1 to 99%, such as 1 to 95%, or 60-99%, by weight, preferably 2 to 96% by weight, of the graft copolymerization product (B), 0 to 98% by weight, preferably 1 to 95% by weight, of the modified vinyl polymer (C) containing a carboxyl, epoxy, amino or substituted amino group, and 0 to 98% by weight, preferably 1 to 95% by weight, of the copolymer (D).

If the amount of the polyether-resin amide (A) is smaller than 1% by weight, the antistatic property of the resin composition is not satisfactory and if the amount of the polyether-resin amide (A) exceeds 40% by weight, the resin composition becomes too soft and the mechanical properties become poor.

If the amount of the graft copolymerization product (B) is smaller than 1% by weight, the impact resistance of the resin composition is not satisfactory and if the amount of the graft copolymer or graft copolymer composition (B) exceeds 99% by weight, the antistatic property becomes poor.

The process for the preparation of the resin composition of the present invention is not particularly critical. For example, the intended resin composition can be obtained by kneading the polyether-ester amide (A) with the graft copolymerization product (B) optionally together with the modified vinyl polymer (C) and the copolymer (D) by a Banbury mixer, a roll, an extruder or the like.

The antistatic effect can be further enhanced by adding an antistatic agent, for example, a metal salt of sulfonic acid or an anionic, cationic or non-ionic surface active agent, so long as the transparency of the resin composition is satisfactory. If necessary, a stabilizer such as an antioxidant or an ultraviolet absorber, a pigment, a dye, a lubricant, a plasticizer, and the like can be added.

Moreover, the compatibility between the components (A) and (B) can be further improved by an addition of a metal salt of sulfonic acid, a tertiary amine or a phosphorus compound.

The present invention will now be described in detail with reference to the following examples. In the examples, all of "%" and "parts" are by weight unless otherwise indicated.

Example 1

A reaction vessel equipped with helical ribbon stirring vanes was charged with 45 parts of caprolactam, 1.43 parts of 2,2'-bis(4- β -hydroxyethoxyphenyl)propane ("Newpol BPE-20" a trade name of a commercial product supplied by Sanyo Chem. Ind.), 43.56 parts of polyethylene glycol having a number average molecular weight of 600 (PEG 600), 13.29 parts of terephthalic acid, 0.20 part of an antioxidant ("Irganox 1098") and 0.1 part of mono-n-butylmonohydroxytin oxide. The inner atmosphere was substituted with N₂ and the mixture was heated and stirred at 260°C for 60 minutes to obtain a transparent homogenous solution. The pressure was reduced according to a predetermined program and a polymerization pressure lower than 0.5 mmHg (66.7Pa) was produced.

Under this polymerization condition, reaction was carried out for 3 hours and 40 minutes. At this point, the stirring torque was 8.0 kg·m at 11 rpm. The polymer was extruded in the form of gut on a cooling belt and pelletized. The relative viscosity of the obtained polyether-ester amide had a relative viscosity (η_r) or 1.98 (as measured in o-chlorophenol at 25°C at a polymer concentration of 0.5%). The copolymerization composition determined by the NMR analysis was as follows.

Residue of caprolactam: 39.3%

Residue of 2,2'-bis(4- β -hydroxyethoxyphenyl)propane: 1.4%

Residue of PEG: 45.4%

Residue of terephthalic acid: 13.9%

Various test pieces were formed from this polyether-ester amide by injection molding, and the mechanical properties were measured according to the ASTM standards.

For determination of the transparency, a test piece was allowed to stand at a temperature of 23°C and a relative humidity of 50% for 1 day, and the total luminous transmittance and haze were measured by a direct-reading haze meter (supplied by Toyo Seiki K.K.). Furthermore, the test piece was allowed to stand at a temperature of 23°C and a relative humidity of 50% for 100 days, and the total luminous transmittance and haze were measured. The test piece used had a diameter of 40 mm and a thickness of 2 mm. The tensile strength at break and the Shore hardness were measured according to the JIS K-7113 and the ASTM D-2240, respectively. The results are as follows.

Tensile elastic modulus: 810 kg/cm²

Tensile strength at break: 370 kg/cm²

Tensile elongation at break: 1120%

Shore hardness: 40D

Total luminous transmittance: 87%

Haze: 4.1%

Examples 2 to 5 and Comparative Examples 1 to 4

The procedures of Example 1 were repeated in the same manner except that the copolymerization composition was changed as shown in Table 1. The characteristics of the obtained polymers were evaluated.

The results are shown in Table 1.

Table 1

	Example No.					Comparative Example No.			
	1	2	3	4	5	1	2	3	4
Copolymerization composition									
Caprolactam (parts)	45	45	30	55	70	45	5*	95	45
BPE-20 (parts)	1.43	3.57	0.72	2.14	3.57	-*	0.36	1.43	1.43
PEG-600 (parts)	43.56	41.10	56.71	34.52	20.55	45.21	77.67	2.47	(PEG100)* 23.04
Terephthalic acid (parts)	13.04	13.46	16.38	10.86	7.66	12.76	22.11	1.44	39.78
Polymerization conditions									
Polymerization time (hr.mm)	3:40	4:00	4:55	3:15	2:50	3:30	8:00	2:10	8:00
Torque (kg.m)	8	8	8	8	8	8	1	8	3
Relative viscosity (η_r)	1.98	1.95	2.04	1.91	1.90	1.98	1.31	2.76	1.52
Mechanical properties									
Tensile elastic modulus (kg.cm ²)	810	750	500	1390	4700	870	28	7700	120
Tensile strength at break (kg.cm ²)	370	390	>200	580	260	350	70	160	145
Tensile elongation at break (kg.cm ²)	1120	1180	>1200	810	360	880	>1200	210	>1200
Shore hardness	40D	33D	26D	49D	65D	42D	10A	>100D	31A

Table 1 (continued)

	Example No.				Comparative Example No.			
	1	2	3	4	5	1	2	3
Transparency								
Just after molding								
Total luminous transmittance (%)	87	88	88	86	81	82	88	22
Haze (%)	4.1	3.9	4.0	4.7	7.2	6.2	4.0	90
After standing for 100 days								
Total luminous transmittance (%)	86	88	87	86	78	71	88	<10
Haze (%)	4.5	4.0	4.1	4.8	7.5	15	4.1	>90

Note: Each asterisk (*) indicates the value outside the scope of the present invention

The following can be seen from the results shown in Table 1.

Each of the polyether-ester amides of the present invention (Examples 1 through 5) has excellent mechanical properties represented by the tensile characteristics and has a high light transmittance. Furthermore, the light transmittance varies only to a minor extent with the lapse of time and an excellent transparency is kept.

Where the diol compound (b) is not contained in the copolymerization composition of the polyether-ester amide (Comparative Example 1), the transparency decreases with the lapse of time and, therefore, the polymer is not preferred. If the content of the polyether-ester unit is lower than 10% by weight (Comparative Example 3), the mechanical properties are poor, and if the content of the polyether-ester units exceeds 90% by weight (Comparative Example 2), the transparency is poor.

If the number average molecular weight of the poly(alkylene oxide)glycol is lower than 200 (Comparative Example 4), the polymerization reaction time is long and satisfactory mechanical properties cannot be obtained.

10 Example 6

The same reaction vessel as used in Example 1 was charged with 40 parts of caprolactam, 6.04 parts of 1,4-(β -hydroxyethoxy)benzene, 44.25 parts of polyethylene glycol having a number average molecular weight of 1,000, 13.20 parts of terephthalic acid and 0.20 part of "Irganox 1098" (a trade name of a commercial product). The inner atmosphere was substituted with N_2 and the mixture was heated and stirred at 260°C for 60 minutes to form a transparent homogeneous solution. The pressure was reduced to 500 mmHg (66667Pa) according to a predetermined program to remove water from the gas phase in the reaction vessel. Then, 0.1 part of zirconium tetrabutoxide was added, and the pressure was further reduced according to the predetermined program to produce a polymerization pressure lower than 0.5 mmHg (66.7Pa).

When reaction was conducted under this polymerization condition for 2 hours and 45 minutes, the stirring torque was 8.0 kg·m at 11 rpm. The polymer was pelletized in the same manner as described in Example 1.

The relative viscosity η_r of the polyether-ester amide was 2.04 as measured in the same manner as described in Example 1, and the copolymerization composition determined by the NMR analysis was as follows.

Residue of caprolactam: 34.2%
Residue of 1,4-bis(β -hydroxyethoxy)benzene: 5.9%
Residue of PEG: 46.4%
Residue of terephthalic acid: 13.5%

This polyether-ester amide was evaluated in the same manner as described in Example 1. The following results were obtained.

Tensile elastic modulus: 710 kg/cm²
Tensile strength at break: 360 kg/cm²
Tensile elongation at break: 1080%
Shore hardness: 38D
Total luminous transmittance: 88%
Haze: 3.6%

40 Example 7

A polyether-ester amide was obtained by conducting polymerization in the same manner as described in Example 6 by using 40 parts of caprolactam, 6.56 parts of 2,6-bis(β -hydroxyethoxy)naphthalene, 37.74 parts of polyethylene glycol having a number average molecular weight of 400 and 21.33 parts of terephthalic acid.

The relative viscosity η_r of the polyether-ester amide was 2.01, and the copolymerization composition determined by the NMR analysis was as follows.

Residue of caprolactam: 34.4%
Residue of 2,6-bis(β -hydroxyethoxy)naphthalene: 6.4%
Residue of PEG: 37.9%
Residue of terephthalic acid: 21.3%

The characteristics of this polymer were evaluated in the same manner as described in Example 1. The following results were obtained.

Tensile elastic modulus: 680 kg/cm²
Tensile strength at break: 310 kg/cm²
Tensile elongation at break: 970%
Shore hardness: 33D

Total luminous transmittance: 90%

Haze: 3.2%

Example 8

5

The same reaction vessel as used in Example 1 was charged with 40 parts of 12-aminododecanoic acid, 7.16 parts of BPE-20, 44.25 parts of polyethylene glycol having a number average molecular weight of 1,000, 11.67 parts of terephthalic acid, 0.20 part of "Irganox 1098" and 0.01 part of antimony trioxide. The inner atmosphere was substituted with N₂ and the mixture was heated and stirred at 260 °C for 60 minutes to obtain a transparent homogeneous solution. The pressure was reduced to 300 mmHg (40000Pa) according to a predetermined program to remove water from the gas phase in the reaction vessel. Then, 0.09 part of zirconium tetrabutoxide was added and the pressure was further reduced according to the predetermined program to produce a polymerization condition of a pressure lower than 0.5 mmHg (66.7Pa).

10

When reaction was carried out under this condition for 2 hours and 15 minutes, the stirring torque was 11 kg·m at 11 rpm. The polymer was pelletized in the same manner as described in Example 1.

15

The relative viscosity η_r of the obtained polyether-ester amide, measured in the same manner as described Example 1, was 2.06, and the copolymerization composition determined by the NMR analysis was as follows.

Residue of 12-aminododecanoic acid: 39.7%

20

Residue of 2,2-(4- β -hydroxyphenyl)propane: 6.6%

Residue of PEG: 42.6%

Residue of terephthalic acid: 11.1%

The characteristics of this polyether-ester amide were evaluated in the same manner as described in Example 1. The results are as follows.

25

Tensile elastic modulus: 750 kg/cm²

Tensile strength at break: 360 kg/cm²

Tensile elongation at break: 750%

Shore hardness: 35D

Total luminous transmittance: 88%

30

Haze: 3.3%

Example 9

35

The same reaction vessel as used in Example 1 was charged with 45 parts of caprolactam, 3.0 parts of BPE-20, 43.1 parts of polyethylene glycol having a number average molecular weight of 600, 13.1 parts of adipic acid, 0.20 part of "Irganox 1098" and 0.01 part of antimony trioxide. The inner atmosphere was substituted with N₂ and the mixture was heated and stirred at 260 °C for 60 minutes to obtain a transparent homogeneous solution. According to a predetermined program, the pressure was reduced to 300 mmHg (4000Pa) to remove water from the gas phase in the reaction vessel. Then, 0.09 part of zirconium tetrabutoxide was added and the pressure was further reduced according to the predetermined program to produce a polymerization condition of a pressure lower than 0.5 mmHg (66.7Pa).

40

When reaction was carried out under this condition for 3 hours and 10 minutes, the stirring torque was 8.0 kg·m at 11 rpm. The polymer was pelletized in the same manner as described in Example 1.

45

The relative viscosity η_r of the obtained polyether-ester amide, measured in the same manner as described in Example 1, was 1.98, and the copolymerization composition determined by the NMR analysis was as follows.

Residue of caprolactam: 35.3%

Residue of 2,2-bis(4- β -hydroxyethoxyphenyl)propane: 3.2%

Residue of PEG: 47.3%

50

Residue of adipic acid: 14.2%

The characteristics of this polyether-ester amide were evaluated in the same manner as described in Example 1. The results are as follows.

55

Tensile elastic modulus: 730 kg/cm²

Tensile strength at break: 340 kg/cm²

Tensile elongation at break: 1010%

Shore hardness: 38D

Total luminous transmittance: 86%

Haze: 5.1%

The resin composition of the present invention will now be described in the following examples. The final resin composition was molded into test pieces by injection molding, and the physical properties were measured according to the following test methods.

5 Izod impact strength:

The Izod impact strength was determined according to ASTM D-256-56A.

Tensile strength:

10

The tensile strength was determined according to ASTM D-638.

Flexural elastic modulus:

15

The flexural elastic modulus was determined according to ASTM D-790.

Volume resistivity:

20

A disk having a thickness of 2 mm and a diameter of 40 mm was prepared and the measurement was conducted in an atmosphere maintained at room temperature (23°C) and a relative humidity of 50%. A super-insulation resistance meter (Model SM-10E supplied by Toa Denpa Kogyo K.K.) was used for the measurement.

Light transmittance:

25

The same as in Examples 1 through 9.

Refractive index:

30

A test piece having a thickness of 1 mm and a size of 7.5 mm x 2.5 mm was prepared. The refractive index was measured at 20°C by using D-ray of sodium in an Abbe refractometer (supplied by ERMA Kogaku K.K.).

Adhesion stress at break:

35

A tensile test piece was prepared according to ASTM D-638. A chloroform solution containing 10% of the same thermoplastic resin composition as that of the test piece was prepared. Two test pieces prepared in the same manner as described above were bonded together by using the above solution as an adhesive so that a rectangular edge face having a size of 3 mm x 12.7 mm of one test piece was placed in contact with and adhered to the major surface of the other test piece in such a manner that the axis of the one test piece was vertical to the major surface of the other test piece. The bonded assembly was allowed to stand at 23°C for 24 hours. Then, pulling was effected at a distortion speed of 5 mm/min in the direction perpendicular to the bonded face, and the stress at break was measured.

45

Appearance:

The test piece was observed with the naked eye and the appearance was evaluated according to the following standards.

50

- A : very good appearance
- B : good appearance
- C : bad appearance with impaired surface

Referential Example

55

(1) Preparation of Polyether-ester Amide (A)

A-1

A reaction vessel equipped with helical ribbon stirring vanes was charged with 45 parts of ε-

caprolactam, 45.21 parts of polyethylene glycol having a number average molecular weight of 600, 1.43 parts of BPE-20 (ethylene oxide adduct of bisphenol A supplied by Sanyo Chem. Ind.), 13.51 parts of terephthalic acid, 0.2 part of "Irganox 1098", 0.09 part of a mono-n-butylmonohydroxytin oxide catalyst, and 0.01 part of an antimony trioxide. The inner atmosphere was substituted with nitrogen and the mixture was heated and stirred at 260 °C for 60 minutes to form a transparent homogeneous solution. Polymerization was carried out at 260 °C under a pressure lower than 0.5 mmHg (66.7Pa) for 4 hours to obtain a viscous transparent polymer. The polymer was extruded in the form of a gut on a cooling belt and pelletized to obtain a pelletized polyether-ester amide (A-1). The polyether-ester amide was allowed to stand at room temperature for 200 days, and it was found that the transparent state was maintained without growth of a crystal.

A-2

A polyether-ester amide (A-2) was prepared in the same manner as described above by using 40 parts of ϵ -caprolactam, 48.67 parts of polyethylene glycol having a number average molecular weight of 1,000, 3.57 parts of BPE-20 and 10.11 parts of terephthalic acid. When the transparency of this polyether-ester amide was confirmed in the same manner as described above with respect to the polyether-ester amide (A-1), it was found that the transparent state was maintained.

A-3

A polyether-ester amide (A-3) was prepared under the same conditions as described above by using 45 parts of ϵ -caprolactam, 46.48 parts of polyethylene glycol having a number average molecular weight of 600 and 12.03 parts of adipic acid. When the transparency of this polyether-ester amide was confirmed in the same manner as described above with respect to the polyether-ester amide (A-1), it was found that crystallization was advanced and the transparency was drastically reduced.

A-4

A reaction vessel equipped with helical ribbon stirring vanes was charged with 9.2 parts of a preliminarily prepared salt (nylon 6-I salt) of hexamethylene-diamine and isophthalic acid (IPA), 32 parts of ϵ -caprolactam, 49.3 parts of polyethylene glycol having a number average molecular weight of 600, 13.9 parts of IPA, 0.2 part of "Irganox 1098" and 0.1 part of an antimony trioxide (SbO) catalyst, and the atmosphere was substituted with nitrogen and the mixture was heated and stirred at 240 °C for 60 minutes to form a transparent homogeneous solution. Polymerization was carried out at 260 °C under a pressure lower than 0.5 mmHg (66.7Pa) for 5 hours to obtain a viscous transparent polymer. The polymer was extruded in the form of a gut on a cooling belt and pelletized to obtain a pelletized polyether-ester amide (A-4). This polyether-ester amide was allowed to stand at room temperature for 200 days, and it was found that the transparency state was maintained without formation of a crystal.

A-5

A reaction vessel equipped with helical ribbon stirring vanes was charged with 47 parts of ϵ -caprolactam, 41.1 parts of polyethylene glycol having a number average molecular weight of 600, 2.15 parts of BPE-20 (ethylene oxide adduct of bisphenol A supplied by Sanyo Chem. Ind.), 13.3 parts of terephthalic acid, 0.3 part of "Irganox 1098" and 0.01 part of antimony trioxide. The inner atmosphere was substituted with N₂ and the mixture was heated and stirred at 260 °C for 60 minutes to form a transparent homogeneous solution. According to a predetermined program, the pressure was reduced to 300 mmHg (4000Pa) to remove water in the gas phase in the reaction vessel, and 0.09 part of zirconium tetrabutoxide was added. Then, the pressure was further reduced according to the predetermined program and polymerization was carried out at 260 °C under a pressure lower than 0.5 mmHg (66.7Pa) for 3 hours to obtain a viscous transparent polymer. The polymer was extruded in the form of a gut on a cooling belt and pelletized to prepare a pelletized polyether-ester amide (A-5). Even after this polyether-ester amide was allowed to stand at room temperature for 200 days, the transparent state was maintained without growth of a crystal.

(2) Preparation of Graft Copolymerization product (B)

B-1

In the presence of 40 parts (as the solid) of a polybutadiene latex (average rubber particle diameter = 0.25 μ m, gel content = 80%), 60 parts of a monomer mixture comprising 72% of methyl methacrylate, 24% of styrene and 4% of acrylonitrile was emulsion-polymerized. The obtained graft copolymer latex was coagulated by sulfuric acid, neutralized with sodium hydroxide, washed, filtered and dried to obtain a powdery graft copolymerization product (B-1).

B-2

In the presence of 50 parts (as the solid) of a styrene/butadiene copolymer latex (styrene

copolymerization ratio = 30%, rubber particle diameter = 0.25 μm , gel content = 78%), 50 parts of a monomer mixture comprising 52% of methyl methacrylate and 48% of styrene was emulsion-polymerized, and the post treatments were carried out in the same manner as described above with respect to (B-1), whereby a powdery graft copolymerization product (B-2) was prepared.

B-3

In the presence of 90 parts (as the solid) of the polybutadiene latex used for the production of (B-1), 10 parts of a monomer mixture comprising 72% of methyl methacrylate, 24% of styrene and 4% of acrylonitrile was emulsion-polymerized, and the post treatments were carried out in the same manner as described above with respect to (B-1), whereby a powdery graft copolymerization product (B-3) was prepared.

(3) Preparation of Modified Vinyl Polymer (C)

C-1

A modified vinyl polymer (C-1) was prepared by suspension-polymerizing 63 parts of methyl methacrylate, 23 parts of styrene, 4 parts of acrylonitrile and 5 parts of methacrylic acid.

C-2

A modified vinyl polymer (C-2) was prepared by suspension-polymerizing 72 parts of methyl methacrylate, 25 parts of styrene and 3 parts of glycidyl methacrylate.

C-3

A modified vinyl polymer (C-3) was prepared by emulsion-polymerizing 67 parts of methyl methacrylate, 24 parts of styrene, 4 parts of acrylonitrile and 5 parts of acrylamide.

C-4

A modified vinyl polymer (C-4) was prepared by suspension-polymerizing 72 parts of methyl methacrylate, 25 parts of styrene and 3 parts of aminoethyl acrylate.

(4) Copolymer (D)

D-1

A copolymer (D-1) was prepared by copolymerizing 72 parts of methyl methacrylate with 24 parts of styrene and 4 parts of acrylonitrile.

D-2

A copolymer (D-2) was prepared by copolymerizing 52 parts of methyl methacrylate with 48 parts of styrene.

Examples 10 to 17

The polyether-ester amide (A), graft copolymerization product (B), modified vinyl polymer (C) and copolymer (D) prepared in the Referential Example, which had refractive indexes shown in Table 3, were mixed at a mixing ratio shown in Table 2, and the mixture was melt-kneaded and extruded at a resin temperature of 200 °C by a vented extruder having a diameter of 40 mm, to form a pellet. A test piece was prepared from the pellet at a cylinder temperature of 230 °C and a mold temperature of 60 °C by an injection molding machine, and the physical properties thereof were measured.

The volume resistivity was measured by using a disk having a thickness of 2 mm under the following conditions.

(1) Just after molding, the disk was washed with an aqueous solution of a detergent ("Mama-Lemon" supplied by Lion Corp.) and washed with distilled water. Water was removed from the surface and the disk was allowed to stand at a temperature of 23 °C and a relative humidity of 50% for 24 hours. Then, the volume resistivity was measured.

(2) After molding, the disk was allowed to stand at a temperature of 23 °C and a relative humidity of 50% for 200 days, and the disk was washed with an aqueous solution of the detergent ("Mama-Lemon") and washed with distilled water. Water was removed from the surface and the disk was allowed to stand at a temperature of 23 °C and a relative humidity of 50% for 24 hours. The measurement was then carried out.

The measurement results are shown in Table 4.

Comparative Examples 5 to 12

The polyether-ester amide (A), graft copolymerization product (B), modified vinyl polymer (C), and copolymer (D) prepared in the Referential Example were mixed at a ratio shown in Table 2. The physical properties were measured in the same manner as described in Example 10. The measurement results are shown in Table 4.

Table 2
Resin Composition

		Polyether-ester amide (A)		Graft copolymerization product (B)		Modified vinyl polymer (C)		Copolymer (D)		PC-S
		(parts)	(parts)	(parts)	(parts)	(parts)	(parts)	(parts)	(parts)	
Example	10	A-1	15	B-1	25	-	-	D-1	60	-
	11	A-1	15	B-1	25	C-1	5	D-1	55	0.5
	12	A-1	30	B-1	15	C-1	10	D-1	45	(DBS)0.1
	13	A-2	10	B-1	25	C-1	5	D-1	60	1.0
	14	A-1	15	B-1	10	C-2	5	D-1	70	-
	15	A-1	15	B-1	80	C-1	5	-	-	-
	16	A-1	15	B-1	25	C-1	5	D-1	55	-
	17	A-1	15	B-1	85	-	-	-	-	-
Comparative Example	5	A-1	0.5*	B-1	25	-	-	D-1	74.5	-
	6	A-1	55*	B-1	20	C-1	10	D-1	15	-
	7	A-1	15	B-3*	20	-	-	D-1	65	-
	8	A-2	15	B-2*	25	-	-	D-2*	60	-
	9	A-3*	15	B-1	25	-	-	D-1	60	-
	10	A-1	15	B-1*	25	-	-	D-2*	60	-
	11	A-1	15	-*	-	-	-	D-1	85	-
	12	A-4*	15	B-1	30	-	-	D-1	55	-

Note: PC-S: Electrostripper (antistatic agent supplied by Kao Corp.)

DBS: Sodium dodecylbenzene-sulfonate (surfactant supplied by Kao Corp.)

Each asterisk (*) indicates the value outside the scope of claim in the present application.

Table 3

Refractive Indexes ($n_D^{20^\circ\text{C}}$) of Polymers

20°C n_D of polymer (A)	20°C n_D of polymer (B)	20°C n_D of rubbery polymer (a)	Rubber	20°C n_D of polymer of monomer mix- ture (b) alone	20°C n_D of polymer (C)	20°C n_D of polymer (D)
A-1 1.517	B-1 1.517	1.516	PBD	1.518	C-1 1.517	D-1 1.518
A-2 1.511	B-2 1.540	1.540	SBR	1.541	C-2 1.516	D-2 1.541
A-3 1.515	B-3 1.516	1.516	PBD	1.518	C-3 1.519	
A-4 1.519					C-4 1.518	
A-5 1.519						

Table 4
Physical Properties

	Transparency		Tensile properties		Flexural modulus	1/2" (12.7mm) Izod impact strength (notched)	Volume resistivity		Stress at break	Appearance
	Total luminous transmittance (%)	Haze (%)	Yield stress (kg/cm ²)	Elongation at break (%)			Just after molding (Ω-cm)	After 200 days standing (Ω-cm)		
Example 10	87	5.7	440	52	21400	9	4 x 10 ¹¹	3 x 10 ¹¹	31	A
"	87	4.5	430	87	22000	15	7 x 10 ¹⁰	5 x 10 ¹⁰	95	A
"	82	7.4	370	111	19200	30	8 x 10 ⁹	4 x 10 ⁹	60	B
"	75	8.8	460	59	23100	12	5 x 10 ¹¹	4 x 10 ¹¹	105	A
"	87	4.2	480	42	23500	7	7 x 10 ¹¹	5 x 10 ¹⁰	92	A
"	83	7.4	360	116	17200	29	2 x 10 ¹¹	1 x 10 ¹⁰	51	A
"	87	4.0	440	93	22100	16	5 x 10 ¹¹	3 x 10 ¹¹	102	A
"	78	8.5	310	81	16800	15	6 x 10 ¹¹	5 x 10 ¹¹	23	A

Table 4 (Continued)
Physical Properties

Comparative Example	Transparency		Tensile properties		Flexural modulus	Izod impact strength (notched)	Volume resistivity		Stress at break	Appearance
	Total luminous transmittance (%)	Haze (%)	Yield stress (kg/cm ²)	Elongation at break (%)			Just after molding	After 200 days standing		
5	88	3.8	460	42	23000	12	1 x 10 ¹⁶	1 x 10 ¹⁵	115	A
6	81	8.6	210	>200	7900	Not broken	5 x 10 ⁸	4 x 10 ⁸	18	A
7	79	9.6	380	31	21800	4	9 x 10 ¹¹	7 x 10 ¹¹	25	C+1
8	39	73	420	50	21800	8	4 x 10 ¹¹	2 x 10 ¹¹	29	A
9	35	78	420	49	21600	7	1 x 10 ¹¹	1 x 10 ¹¹	30	A
10	43	50	430	50	21700	7	4 x 10 ¹¹	3 x 10 ¹¹	30	A
11	87	4.0	490	12	24100	2	9 x 10 ¹¹	9 x 10 ¹¹	36	A
12	84	16	380	97	19800	10	2 x 10 ¹¹	1 x 10 ¹¹	31	B

*1: Fish eye occurred

The following can be seen from the results shown in Table 4.

Each of the resin compositions of the present invention (Examples 10 through 17) has an excellent transparency and mechanical properties represented by the impact strength and a low volume resistivity. Furthermore, the resistance value is changed only to a slight extent by surface washing or with the lapse of time, and an excellent permanent antistatic effect is exerted. Moreover, the appearance of the molded

article is excellent.

Namely, the resin composition of the present invention has excellent mechanical properties, permanent antistatic effect and transparency in combination and provides a molded article having a very good appearance.

5 The resin composition of the present invention additionally comprising the modified vinyl polymer (C) has a high stress at break and interlaminar separation is not caused, and a molded product prepared from the resin composition is excellent.

10 If the content of the polyether-ester amide (A) is lower than 1% by weight (Comparative Example 5), the antistatic effect (resistivity) is poor, and if the content of the polyether-ester amide (A) exceeds 40% by weight, the tensile yield stress and flexural modulus are poor.

15 If the graft copolymerization product (B) used contains the rubbery polymer in an amount exceeding 80 parts by weight (Comparative Example 7), the dispersibility of the product (B) is poor and the appearance of the molded article is impaired. Where the polyether-ester amide (A) not including the diol compound (b) copolymerized is used and where the difference of the refractive index among the polyether-ester amide (A), graft copolymerization product (D) and copolymer (D) exceeds 0.02 (Comparative Examples 8 through 10 and 12), the transparency is drastically degraded.

Where the graft copolymerization product (B) is not contained (Comparative Example 11), the impact resistance is poor.

20 Examples 18 through 26

25 The polyether-ester amide (A), graft copolymerization product (B), modified vinyl polymer (C) and copolymer (D) prepared in the Referential Example, which had refractive indexes shown in Table 3, were mixed at a ratio shown in Table 5, and the mixture was melt-kneaded and extruded at a resin temperature of 200 °C by a vented extruder having a diameter of 40 mm to prepare a pellet. The pellet was molded into a test piece at a cylinder temperature of 230 °C and a mold temperature of 60 °C by an extrusion molding machine. The physical properties were measured. The results are shown in Table 6.

30 Comparative Examples 13 to 20

35 The polyether-ester amide (A), graft copolymerization product (B), modified vinyl copolymer (C) and copolymer (D) prepared in the Referential Example, which had refractive indexes shown in Table 3, were mixed at a ratio shown in Table 5. The physical properties were measured in the same manner as described in Example 18. The results are shown in Table 6.

Table 5

Resin Composition

	Polyether-ester amide (A)	Graft copoly- merization product (B)	Modified vinyl polymer (C)	Copolymer (D)	Antistatic agent					
	(parts)	(parts)	(parts)	(parts)	(parts)					
Example 18	A-5	15	B-1	25	C-1	6	D-1	54	-	-
" 19	A-5	15	B-1	25	C-1	6	D-1	54	PC-S	0.5
" 20	A-5	30	B-1	15	C-2	15	D-1	40	-	-
" 21	A-2	10	B-1	25	C-2	4	D-1	61	HES	0.5
" 22	A-2	15	B-1	10	C-2	6	D-1	69	-	-
" 23	A-5	15	B-1	79	C-1	6	-	-	-	-
" 24	A-2	10	B-1	25	C-2	4	D-1	61	-	-
" 25	A-5	5	B-1	25	C-1	3	D-1	67	-	-
" 26	A-5	15	B-1	25	-	-	D-1	60	-	-
Comparative Example 13	A-5	0.5*	B-1	25	C-1	6	D-1	68.5	-	-
" 14	A-5	50*	B-1	20	C-1	20	D-1	10	-	-
" 15	A-5	15	-*	-*	C-1	6	D-1	60	-	-
" 16	A-3*	15	B-1	25	C-1	6	D-1	54	-	-
" 17	A-5	15	B-2	25	C-1*	6	D-2*	54	-	-
" 18	A-5	15	B-2*	25	C-1*	6	D-1	54	-	-
" 19	A-5	15	B-1	25	C-1*	6	D-2*	54	-	-
" 20	A-5	15	B-3*	15	C-1	6	D-1	64	-	-

Note: PC-S: Electrostripper (antistatic agent supplied by Kao Corp.)

HES: N,N-dihydroxyethylstearylamine

Each asterisk (*) indicates the value outside the scope of claim in the present invention.

Table 6
Physical Properties

Example	Transparency		Tensile properties		Flexural modulus	1/2" (12.7 mm) Izod impact strength (notched)	Volume resistivity		Stress at break	Appearance
	Total luminous transmittance (%)	Haze (%)	Yield stress (kg/cm ²)	Elongation at break (%)			Just after molding	After 200 days standing		
	(%)	(%)	(kg/cm ²)	(%)	(kg/cm ²)	(kg.cm/cm)	(Ω.cm)	(Ω.cm)	(kg/cm ²)	
18	88	4	440	46	22100	15	6 x 10 ¹¹	4 x 10 ¹¹	91	A
19	87	5	430	43	22000	13	8 x 10 ¹⁰	5 x 10 ¹⁰	87	A
20	82	7	370	96	19000	26	9 x 10 ⁹	8 x 10 ⁹	56	B
21	76	7	460	57	22400	12	9 x 10 ¹¹	8 x 10 ¹¹	101	A
22	78	6	480	38	23300	7	7 x 10 ¹¹	6 x 10 ¹¹	85	A
23	81	6	360	103	17500	27	4 x 10 ¹¹	1 x 10 ¹¹	50	A
24	77	6	460	59	22500	12	7 x 10 ¹²	6 x 10 ¹²	102	A
25	89	3	470	62	22800	9	3 x 10 ¹⁴	1 x 10 ¹⁴	110	A
26	86	6	440	46	21500	8	7 x 10 ¹¹	5 x 10 ¹¹	30	A

Table 6 (Continued)

Physical Properties

	Transparency	Tensile properties		Flexural modulus	1/2" Izod impact strength (notched)	Volume resistivity		Stress at break	Appearance
						Just after molding	After 200 days standing		
	Total luminous transmittance (%)	Haze (%)	Yield stress (kg/cm ²)	Elongation at break (%)		(Ω -cm)	(Ω -cm)	(kg/cm ²)	
Comparative Example 13	88	3	460	37	23100	12	2 x 10 ¹⁶	4 x 10 ¹⁵	A
" 14	79	11	230	>200	7900	Not broken	1 x 10 ⁹	9 x 10 ⁸	B
" 15	88	3	490	8	24200	3	9 x 10 ¹¹	8 x 10 ¹¹	A
" 16	45	51	430	45	22000	14	5 x 10 ¹¹	4 x 10 ¹¹	A
" 17	37	80	430	40	22100	13	5 x 10 ¹¹	4 x 10 ¹¹	A
" 18	42	62	440	41	22000	13	6 x 10 ¹¹	4 x 10 ¹¹	A
" 19	37	77	440	36	22000	12	6 x 10 ¹¹	4 x 10 ¹¹	A
" 20	78	20	400	26	22300	4	9 x 10 ¹¹	8 x 10 ¹¹	C

From the results shown in Table 6, the following can be seen.

Each of the resin compositions of the present invention (Examples 18 through 26) has an excellent transparency and mechanical properties represented by the impact strength and a low volume resistivity. Furthermore, the resistance value is changed only to a slight extent by surface washing or with the lapse of time and an excellent permanent antistatic effect is exerted.

Namely, the resin composition of the present invention has excellent mechanical properties, permanent antistatic effect and transparency in combination.

Where the content of the polyether-ester amide (A) is lower than 1% by weight (Comparative Example 14, the antistatic effect (resistivity) is poor, and if the content of the polyether-ester amide (A) exceeds 40% by weight, the tensile yield stress and flexural modulus are inferior.

Where the graft copolymerization product (B) is not contained (Comparative Example 16), the impact resistance is poor. Where the polyether-ester amide (A) not containing the diol compound (b) copolymerized as the polyether-ester component is used and where the difference of the refractive index among the polyether-ester amide (A), the graft copolymerization product (B) and the copolymer (D) exceeds 0.02 (Comparative Examples 17 through 20), the transparency is drastically degraded. Where the graft copolymerization product (B) contains the rubbery polymer in an amount exceeding 80 parts (Comparative Example 20), the dispersibility of the graft copolymerization product (B) is poor and the appearance of the molded article is impaired.




Claims

Claims for the following Contracting States : GB, DE, FR, NL, IT, BE

1. A transparent polyether-ester amide having a relative viscosity, when measured in a 0.5% solution in o-chlorophenol at 25°C, of 1.1 to 3.5 and which is formed by copolymerizing:


(a) an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which salt is synthesized from a diamine and a dicarboxylic acid,

(b) at least one diol compound selected from compounds represented by the following formulae (I) through (III):

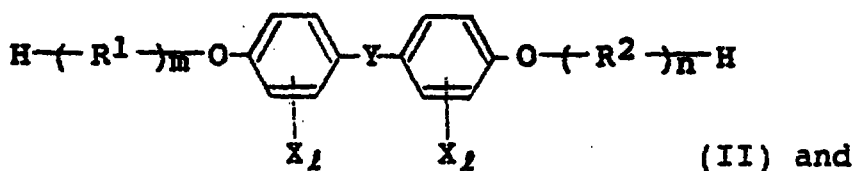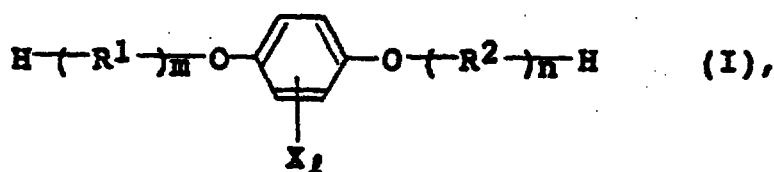

wherein R¹ and R² independently stand for at least one of an ethylene oxide group and a propylene oxide group, Y stands for a covalent bond, an alkylene group having 1 to 6 carbon atoms, an alkylidene group having 1 to 6 carbon atoms, a cycloalkylidene group having 7 to 17 carbon atoms, an arylalkylidene group having 7 to 17 carbon atoms, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ or NH, X stands for an alkyl group having 1 to 6 carbon atoms, a halogen, a sulfonic acid or a salt thereof, l is 0 or an integer of from 1 to 4, and m and n stand for an integer of from 1 to 15,

(c) at least one diol compound selected from a poly(alkyleneoxide)glycol having a number average molecular weight of at least 200 and a diol represented by the following general formula (IV):



wherein R³ stands for an alkylene, alkylidene, cycloalkylidene or arylalkylidene group having 2 to 16 carbon atoms, and

(d) a dicarboxylic acid having 4 to 20 carbon atoms,

wherein the content of the polyether-ester units is 10 to 90% by weight based on the weight of the



Namely, the resin composition of the present invention has excellent mechanical properties, permanent antistatic effect and transparency in combination.

Where the content of the polyether-ester amide (A) is lower than 1% by weight (Comparative Example 14, the antistatic effect (resistivity) is poor, and if the content of the polyether-ester amide (A) exceeds 40% by weight, the tensile yield stress and flexural modulus are inferior.

Where the graft copolymerization product (B) is not contained (Comparative Example 16), the impact resistance is poor. Where the polyether-ester amide (A) not containing the diol compound (b) copolymerized as the polyether-ester component is used and where the difference of the refractive index among the polyether-ester amide (A), the graft copolymerization product (B) and the copolymer (D) exceeds 0.02 (Comparative Examples 17 through 20), the transparency is drastically degraded. Where the graft copolymerization product (B) contains the rubbery polymer in an amount exceeding 80 parts (Comparative Example 20), the dispersibility of the graft copolymerization product (B) is poor and the appearance of the molded article is impaired.




Claims

Claims for the following Contracting States : GB, DE, FR, NL, IT, BE

1. A transparent polyether-ester amide having a relative viscosity, when measured in a 0.5% solution in o-chlorophenol at 25 °C, of 1.1 to 3.5 and which is formed by copolymerizing:


(a) an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which salt is synthesized from a diamine and a dicarboxylic acid,

(b) at least one diol compound selected from compounds represented by the following formulae (I) through (III):

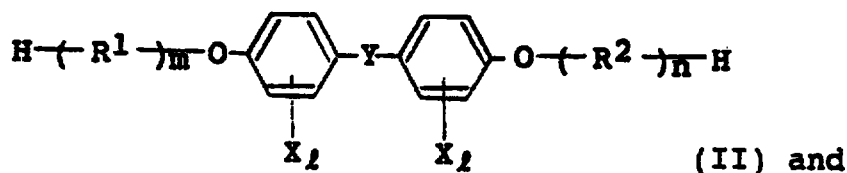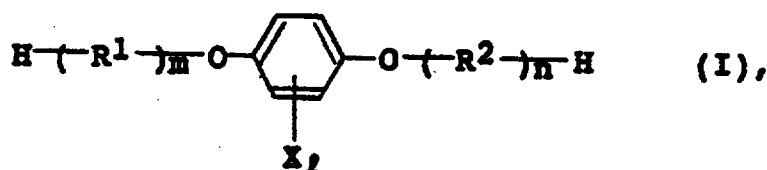

wherein R¹ and R² independently stand for at least one of an ethylene oxide group and a propylene oxide group, Y stands for a covalent bond, an alkylene group having 1 to 6 carbon atoms, an alkylidene group having 1 to 6 carbon atoms, a cycloalkylidene group having 7 to 17 carbon atoms, an arylalkylidene group having 7 to 17 carbon atoms, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ or NH, X stands for an alkyl group having 1 to 6 carbon atoms, a halogen, a sulfonic acid or a salt thereof, l is 0 or an integer of from 1 to 4, and m and n stand for an integer of from 1 to 15,

(c) at least one diol compound selected from a poly(alkyleneoxide)glycol having a number average molecular weight of at least 200 and a diol represented by the following general formula (IV):



wherein R³ stands for an alkylene, alkylidene, cycloalkylidene or arylalkylidene group having 2 to 16 carbon atoms, and


(d) a dicarboxylic acid having 4 to 20 carbon atoms,

wherein the content of the polyether-ester units is 10 to 90% by weight based on the weight of the



polyether-ester amide.

2. A transparent polyether-ester amide as set forth in claim 1, wherein the component (a) is ϵ -caprolactam.
- 5 3. A transparent polyether-ester amide as set forth in claim 1 or 2, wherein in the diol compound (b) represented by the formulae (I), (II) and (III), at least one of R^1 and R^2 is an ethylene oxide group.
4. A transparent polyether-ester amide as set forth in claim 1, 2 or 3, wherein in the diol compound (b) represented by the formulae (I), (II) and (III), m and n stand for an integer of from 1 to 5.
- 10 5. A transparent polyether-ester amide as set forth in claim 1, wherein the diol (b) is a compound represented by the formula (II), in which Y is a $C(CH_3)_2$ group, t is 0 and each of R^1 and R^2 is an ethylene oxide group.
- 15 6. A transparent polyether-ester amide as set forth in any preceding claim, wherein the diol (c) is a poly(alkylene oxide)glycol.
7. A transparent polyether-ester amide as set forth in claim 6, wherein the number average molecular weight of the poly(alkylene oxide)glycol is 200 to 6,000.
- 20 8. A transparent polyether-ester amide as set forth in any preceding claim, wherein the dicarboxylic acid (d) is at least one member selected from the group consisting of terephthalic acid, isophthalic acid, 1,4-cyclohexanedicarboxylic acid, sebacic acid, adipic acid, dodecanedioic acid and dodecanedicarboxylic acid.
- 25 9. A transparent polyether-ester amide as set forth in any preceding claim, wherein the content of the polyamide units is 10 to 80% by weight based on the weight of the polyether-ester amide.
10. A transparent thermoplastic resin composition comprising:
 - 30 (A) 1 to 40% by weight of a transparent polyether-ester amide according to any preceding claim; and
 - (B) 99 to 1% by weight of a graft copolymerization product formed by graft-polymerizing (a) 1 to 80 parts by weight of a rubbery polymer with (b) 99 to 20 parts by weight of a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected
 - 35 from a methacrylic acid ester and an acrylic acid ester and 0 to 60% by weight of a vinyl cyanide monomer,
 - wherein the difference between the refractive indexes of the respective components (A) and (B) is not larger than 0.02.
- 40 11. A transparent thermoplastic resin composition as set forth in claim 10, which further comprises (C) up to 98% by weight, based on the total thermoplastic resin composition, of a modified vinyl polymer which is other than a graft copolymerization product (B) and contains at least one functional group selected from carboxyl, epoxy and optionally substituted amino groups of the formula



- 45
- 50 wherein R^3 is hydrogen, methyl or ethyl and R^4 is C_{1-12} alkyl, C_{2-12} alkanoyl, phenyl or C_6-12 cycloalkyl and derivatives thereof, wherein each of the differences between the respective refractive indexes of the respective components (A) and (B), (A) and (C), and (B) and (C) is not larger than 0.02.
- 55 12. A transparent thermoplastic resin composition as set forth in claim 10 or 11, wherein the difference between the refractive indexes of the respective components (A) and (B) is smaller than 0.01.



13. A transparent thermoplastic resin composition as set forth in claim 11, wherein each of the differences between the respective refractive indexes of the respective components (A) and (B), (A) and (C), and (B) and (C) is smaller than 0.01.

14. A transparent thermoplastic resin composition as set forth in claim 11 or 13, wherein the modified vinyl polymer (C) contains functional groups selected from carboxyl, epoxy, amino and substituted amino groups, which groups are present in an amount of 5×10^{-7} to 0.5 mole per 100 g of the total thermoplastic resin composition.

15. A transparent thermoplastic resin composition as set forth in any one of claims 10 to 14, which further comprises (D) up to 98% by weight, based on the total thermoplastic resin composition, of a copolymer derived from a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected from a methacrylic acid ester and an acrylic acid ester, 0 to 60% by weight of a vinyl cyanide monomer and 0 to 60% by weight of another copolymerizable mon-
oethylenically unsaturated monomer;

wherein each of the differences between any of the refractive indexes of the respective components (A), (B) and (D) is not larger than 0.02.

16. A transparent thermoplastic resin composition is set forth in any one of claims 10 to 15, which further comprises (C) less than 98% by weight, based on the total thermoplastic resin composition of a modified vinyl polymer as defined in claim 11, and (D) less than 98% by weight, based on the total thermoplastic resin composition, of a copolymer as defined in claim 16;

wherein each of the differences between any of the respective indexes of the respective components (A), (B), (C) and (D) is not larger than 0.02.




17. A transparent thermoplastic resin composition as set forth in claim 15 or 16, wherein the component (B)/component (D) weight ratio is in the range of from 2/98 to 99/1.

Claims for the following Contracting State : ES

1. A process for preparing a transparent polyether-ester amide, having a relative viscosity, when measured in a 0.5% solution in o-chlorophenol at 25°C, of 1.1 to 3.5, which process comprises copolymerizing:

(a) an aminocarboxylic acid having at least 6 carbon atoms, a lactam having at least 6 carbon atoms or a salt having at least 6 carbon atoms, which salt is synthesized from a diamine and a dicarboxylic acid,

(b) at least one diol compound selected from compounds represented by the following formulae (I) through (III):

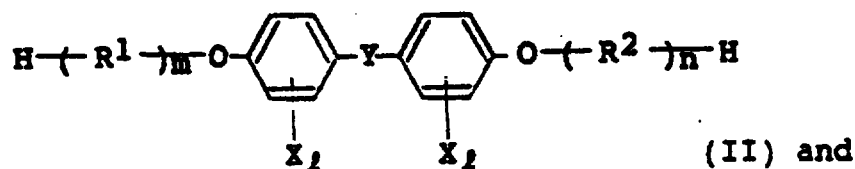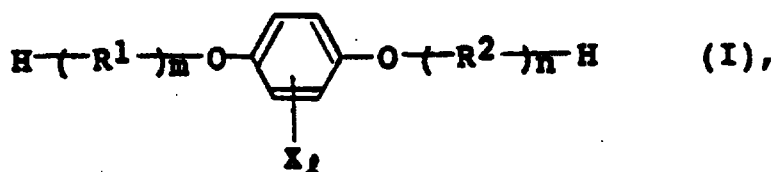


wherein R¹ and R² independently stand for at least one of an ethylene oxide group and a



propylene oxide group, Y stands for a covalent bond, an alkylene group having 1 to 6 carbon atoms, an alkylidene group having 1 to 6 carbon atoms, a cycloalkylidene group having 7 to 17 carbon atoms, an arylalkylidene group having 7 to 17 carbon atoms, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ or NH, X stands for an alkyl group having 1 to 6 carbon atoms, a halogen, a sulfonic acid or a salt thereof, *l* is 0 or an integer of from 1 to 4, and *m* and *n* stand for an integer of from 1 to 15,

(c) at least one diol compound selected from a poly(alkyleneoxide)glycol having a number average molecular weight of at least 200, and a diol represented by the following general formula (IV):




wherein R³ stands for an alkylene, alkylidene, cycloalkylidene or arylalkylidene group having 2 to 16 carbon atoms, and

(d) a dicarboxylic acid having 4 to 20 carbon atoms,

wherein the content of the polyether-ester units is 10 to 90% by weight based on the weight of the polyether-ester amide.

2. A process as set forth in claim 1, wherein the component (a) is ϵ -caprolactam.
3. A process as set forth in claim 1 or 2, wherein in the diol compound (b) represented by the formulae (I), (II) and (III), at least one of R¹ and R² is an ethylene oxide group.
4. A process as set forth in claim 1, 2 or 3, wherein in the diol compound (b) represented by the formulae (I), (II) and (III), *m* and *n* stand for an integer of from 1 to 5.
5. A process as set forth in claim 1, wherein the diol (b) is a compound represented by the formula (II), in which Y is a C(CH₃)₂ group, *l* is 0 and each of R¹ and R² is an ethylene amide group.
6. A process as set forth in any preceding claim, wherein the diol (c) is a poly(alkylene oxide)glycol.
7. A process as set forth in claim 6, wherein the number average molecular weight of the poly(alkylene oxide)glycol is 200 to 6,000.
8. A process as set forth in any preceding claim, wherein the dicarboxylic acid (d) is at least one of terephthalic acid, isophthalic acid, 1,4-cyclohexane-dicarboxylic acid, sebacic acid, adipic acid, dodecanedioic acid and dodecanedicarboxylic acid.
9. A process as set forth in any preceding claim, wherein the content of the polyamide units is 10 to 80% by weight based on the weight of the polyether-ester amide.
10. A process for preparing a transparent thermoplastic resin composition, which process comprises admixing:
 - (A) 1 to 40% by weight of a transparent polyether-ester amide according to any preceding claim; and
 - (B) 99 to 1% by weight of a graft copolymerization product formed by graft-polymerizing (a) 1 to 80 parts by weight of a rubbery polymer with (b) 99 to 20 parts by weight of a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected from a methacrylic acid ester and an acrylic acid ester and 0 to 60% by weight of a vinyl cyanide monomer,
 wherein the difference between the refractive indexes of the respective components (A) and (B) is not larger than 0.02.
11. A process as set forth in claim 10, which further comprises (C) up to 98% by weight, based on the total thermoplastic resin composition, of a modified vinyl polymer which is other than a graft copolymerization product (B) and contains at least one functional group selected from carboxyl, epoxy and optionally substituted amino groups of the formula



wherein R^3 is hydrogen, methyl or ethyl and R^4 is hydrogen, C_{1-12} alkyl, C_{2-12} alkanoyl, phenyl or C_{6-12} cycloalkyl and derivatives thereof, wherein each of the differences between the respective refractive indexes of the respective components (A) and (B), (A) and (C), and (B) and (C) is not larger than 0.02.

12. A process as set forth in claim 10 or 11, wherein the difference between the refractive indexes of the respective components (A) and (B) is smaller than 0.01.

13. A process as set forth in claim 11, wherein each of the differences between the respective refractive indexes of the respective components (A) and (B), (A) and (C), and (B) and (C) is smaller than 0.01.

14. A process as set forth in claim 11 or 13, wherein the modified vinyl polymer (C) contains functional groups selected from carboxyl, epoxy, amino and substituted amino groups, which groups are present in an amount of 5×10^{-7} to 0.5 mole per 100 g of the total thermoplastic resin composition.

15. A process as set forth in any one of claims 10 to 14, which further comprises (D) up to 98% by weight, based on the total thermoplastic resin composition, of a copolymer derived from a monomer mixture comprising 100 to 40% by weight of an aromatic vinyl monomer and at least one monomer selected from a methacrylic acid ester and an acrylic acid ester, 0 to 60% by weight of a vinyl cyanide monomer and 0 to 60% by weight of another copolymerizable monoethylenically unsaturated monomer; wherein each of the differences between any of the refractive indexes of the respective components (A), (B) and (D) is not larger than 0.02.

16. A process as set forth in any one of claims 10 to 15, which further comprises (C) less than 98% by weight, based on the total thermoplastic resin composition of a modified vinyl polymer as defined in claim 11, and (D) less than 98% by weight, based on the total thermoplastic resin composition, of a copolymer as defined in claim 16; wherein each of the differences between any of the respective indexes of the respective components (A), (B), (C) and (D) is not larger than 0.02.

17. A process as set forth in claim 15 or 16, wherein the component (B)/component (D) weight ratio is in the range of from 2/98 to 99/1.

18. A process for preparing a transparent thermoplastic resin composition, which process comprises:
 (i) copolymerizing each of the said components (a), (b), (c) and (d), given and defined in claim 1 to produce a transparent polyether-ester (A), and
 (ii) admixing with the said polyether-ester amide (A), 99 to 1% by weight of a graft copolymerization product (B), given and defined in claim 10, and optionally
 (iii) admixing with (A) and (B) a component (C), given and defined in, and present in an amount defined in, claim 11, and/or a component (D), given and defined in, and present in an amount defined in, claim 15.




Patentansprüche

Patentansprüche für folgende Vertragsstaaten : GB, DE, FR, NL, IT, BE

1. Transparentes Polyetheresteramid, das eine in einer 0,5%igen Lösung in o-Chlorphenol bei 25°C gemessene relative Viskosität von 1,1 bis 3,5 aufweist und das durch Copolymerisation von:

(a) einer Aminocarbonsäure mit mindestens 6 Kohlenstoffatomen, einem Lactam mit mindestens 6 Kohlenstoffatomen oder einem Salz mit mindestens 6 Kohlenstoffatomen, wobei dieses Salz aus einem Diamin und einer Dicarbonsäure synthetisiert wird,

(b) mindestens einer Diolverbindung, die aus Verbindungen ausgewählt ist, die durch die folgenden Formeln (I) bis (III) dargestellt werden:

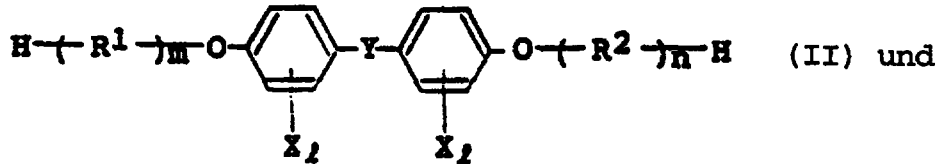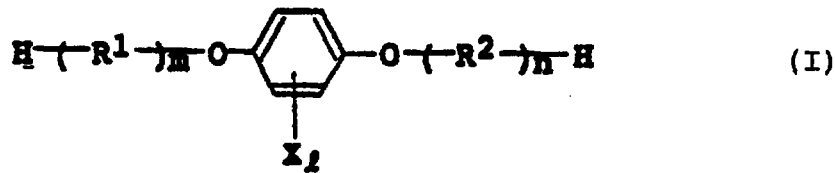

in denen R¹ und R² unabhängig voneinander eine Ethylenoxidgruppe oder eine Propylenoxidgruppe darstellen, Y eine Kovalenzbindung, eine Alkylengruppe mit 1 bis 6 Kohlenstoffatomen, eine Alkylidengruppe mit 1 bis 6 Kohlenstoffatomen, eine Cycloalkylidengruppe mit 7 bis 17 Kohlenstoffatomen, eine Arylalkylidengruppe mit 7 bis 17 Kohlenstoffatomen, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ oder NH ist, X eine Alkylgruppe mit 1 bis 6 Kohlenstoffatomen, ein Halogenatom, eine Sulfonsäure oder ein Salz davon ist, l 0 oder eine ganze Zahl von 1 bis 4 ist, und m und n eine ganze Zahl von 1 bis 15 sind,

(c) mindestens einer Diolverbindung, die aus einem Poly(alkylenoxid)glycol mit einem Zahlenmittel des Molekulargewichts von mindestens 200 und mindestens einem Diol ausgewählt ist, das durch folgende allgemeine Formel (IV) dargestellt wird:



worin R³ eine Alkyl-, Alkyliden-, Cycloalkyliden- oder Arylalkylidengruppe mit 2 bis 16 Kohlenstoffatomen ist, und

(d) einer Dicarbonsäure hergestellt wird, die 4 bis 20 Kohlenstoffatome aufweist, wobei der Gehalt an Polyetherestereinheiten auf der Basis des Gewichtes des Polyetheresteramids 10 bis 90 Gew.-% beträgt.

2. Transparentes Polyetheresteramid nach Anspruch 1, wobei die Komponente (a) ε-Caprolactam ist.

3. Transparentes Polyetheresteramid nach Anspruch 1 oder 2, wobei in der durch die Formeln (I), (II) und (III) dargestellten Diolverbindung (b) mindestens einer der Reste R¹ und R² eine Ethylenoxidgruppe ist.

4. Transparentes Polyetheresteramid nach Anspruch 1, 2 oder 3, worin in der durch die Formeln (I), (II) und (III) dargestellten Diolverbindung (b) m und n eine ganze Zahl von 1 bis 5 sind.

5. Transparentes Polyetheresteramid nach Anspruch 1, wobei das Diol (b) eine Verbindung ist, die durch die Formel (II) dargestellt wird, worin Y eine C(CH₃)₂-Gruppe ist, l 0 ist und jedes R¹ und R² eine Ethylenoxidgruppe ist.

6. Transparentes Polyetheresteramid nach einem der vorstehenden Ansprüche, wobei das Diol (c) ein Poly(alkylenoxid)glycol ist.

7. Transparentes Polyetheresteramid nach Anspruch 6, wobei das Zahlenmittel des Molekulargewichts im Poly(alkylenoxid)glycol 200 bis 6.000 beträgt.

8. Transparentes Polyetheresteramid nach einem der vorstehenden Ansprüche, wobei die Dicarbonsäure (d) mindestens eine Verbindung ist, die aus der Gruppe ausgewählt ist, die aus Terephthalsäure, Isophthalsäure, 1,4-Cyclohexandicarbonsäure, Sebacinsäure, Adipinsäure, Dodecandionsäure und Do-



decandicarbonsäure besteht.

9. Transparentes Polyetheresteramid nach einem der vorstehenden Ansprüche, wobei der Gehalt der Polyamideinheiten auf der Basis des Gewichtes des Polyetheresteramids 10 bis 80 Gew.-% beträgt.


10. Transparente thermoplastische Harzzusammensetzung, welche umfaßt:

(A) 1 bis 40 Gew.-% eines transparenten Polyetheresteramids nach einem der vorstehenden Ansprüche, und

(B) 99 bis 1 Gew.-% eines Pfcopolymerisationsproduktes, das durch Pfcopolymerisation von (a) 1 bis 80 Gewichtsteilen eines gummiartigen Polymers mit (b) 99 bis 20 Gewichtsteilen einer Monomermischung hergestellt wird, die 100 bis 40 Gew.-% eines aromatischen Vinylmonomers und mindestens eines Monomers, das aus Methacrylsäureester und Acrylsäureester ausgewählt ist, und 0 bis 60 Gew.-% eines Vinylcyanidmonomers umfaßt,

wobei der Unterschied zwischen den Brechungsindizes der entsprechenden Verbindungen (A) und (B) nicht größer als 0,02 ist.

11. Transparente thermoplastische Harzzusammensetzung nach Anspruch 10, die außerdem (C) auf der Basis der gesamten thermoplastischen Harzzusammensetzung bis zu 98 Gew.-% eines modifizierten Vinylpolymers umfaßt, das vom Pfcopolymerisationsprodukt (B) verschieden ist und mindestens eine funktionelle Gruppe enthält, die aus Carboxyl-, Epoxy- und gegebenenfalls substituierten Aminogruppen der Formel ausgewählt ist



worin R^3 Wasserstoff, Methyl oder Ethyl ist und R^4 C_1 - 12 -Alkyl, C_2 - 12 -Alkanoyl, Phenyl oder C_6 - 12 -Cycloalkyl und Derivate davon ist, wobei jeder Unterschied zwischen den entsprechenden Brechungsindizes der entsprechenden Komponenten (A) und (B), (A) und (C), und (B) und (C) nicht größer als 0,02 ist.

12. Transparente thermoplastische Harzzusammensetzung nach Anspruch 10 oder 11, wobei der Unterschied zwischen den Brechungsindizes der entsprechenden Komponenten (A) und (B) geringer als 0,01 ist.

13. Transparente thermoplastische Harzzusammensetzung nach Anspruch 11, wobei jeder Unterschied zwischen den entsprechenden Brechungsindizes der entsprechenden Komponenten (A) und (B), (A) und (C), und (B) und (C) geringer als 0,01 ist.

14. Transparente thermoplastische Harzzusammensetzung nach Anspruch 11 oder 13, wobei das modifizierte Vinylpolymer (C) funktionelle Gruppen enthält, die aus Carboxyl-, Epoxy-, Amino- und substituierten Aminogruppen ausgewählt sind, wobei diese Gruppen in einer Menge von 5×10^{-7} bis 0,5 Mol pro 100 g der gesamten thermoplastischen Harzzusammensetzung vorhanden sind.

15. Transparente thermoplastische Harzzusammensetzung nach einem der Ansprüche 10 bis 14, die außerdem (D) auf der Basis der gesamten thermoplastischen Harzzusammensetzung bis zu 98 Gew.-% eines Copolymers umfaßt, das von einer Monomermischung stammt, die 100 bis 40 Gew.-% eines aromatischen Vinylmonomers und mindestens eines Monomers, das aus Methacrylsäureester und Acrylsäureester ausgewählt ist, 0 bis 60 Gew.-% eines Vinylcyanidmonomers und 0 bis 60 Gew.-% eines weiteren copolymerisierbaren monoethylenisch ungesättigten Monomers umfaßt; wobei jeder Unterschied zwischen jedem der Brechungsindizes der entsprechenden Komponenten (A), (B) und (D) nicht größer als 0,02 ist.

16. Transparente thermoplastische Harzzusammensetzung nach einem der Ansprüche 10 bis 15, die außerdem (C) auf der Basis der gesamten thermoplastischen Harzzusammensetzung weniger als 98 Gew.-% eines modifizierten Vinylpolymers nach Anspruch 11 und (D) auf der Basis der gesamten



thermoplastischen Harzzusammensetzung weniger als 98 Gew.-% eines Copolymers nach Anspruch 16 umfaßt;

wobei jeder Unterschied zwischen jedem der entsprechenden Indices der entsprechenden Komponenten (A), (B), (C) und (D) nicht größer als 0,02 ist.




17. Transparente thermoplastische Harzzusammensetzung nach Anspruch 15 oder 16, wobei das Gewichtsverhältnis von Komponente (B)/Komponente (D) im Bereich von 2/98 bis 99/1 liegt.

Patentansprüche für folgenden Vertragsstaat : ES

1. Verfahren zur Herstellung eines transparenten Polyetheresteramids mit einer in einer 0,5%igen Lösung in o-Chlorphenol bei 25 °C gemessenen relativen Viskosität von 1,1 bis 3,5, wobei dieses Verfahren die Copolymerisation umfaßt:

(a) einer Aminocarbonsäure mit mindestens 6 Kohlenstoffatomen, eines Lactams mit mindestens 6 Kohlenstoffatomen oder eines Salzes mit mindestens 6 Kohlenstoffatomen, wobei dieses Salz aus einem Diamin und einer Dicarbonsäure synthetisiert wird,

(b) mindestens einer Diolverbindung, die aus Verbindungen ausgewählt ist, die durch die folgenden Formeln (I) bis (III) dargestellt werden:

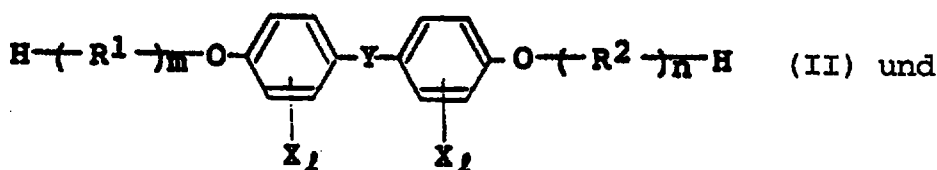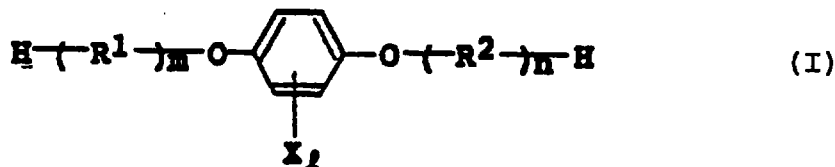

worin R¹ und R² unabhängig voneinander eine Ethylenoxidgruppe oder eine Propylenoxidgruppe darstellen, Y eine Kovalenzbindung, eine Alkylengruppe mit 1 bis 6 Kohlenstoffatomen, eine Alkylidengruppe mit 1 bis 6 Kohlenstoffatomen, eine Cycloalkylidengruppe mit 7 bis 17 Kohlenstoffatomen, eine Arylalkylidengruppe mit 7 bis 17 Kohlenstoffatomen, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ oder NH ist, X eine Alkylgruppe mit 1 bis 6 Kohlenstoffatomen, ein Halogenatom, Sulfonsäure oder ein Salz davon ist, t 0 oder eine ganze Zahl von 1 bis 4 ist, und m und n eine ganze Zahl von 1 bis 15 sind,

(c) mindestens einer Diolverbindung, die aus einem Poly(alkylenoxid)glycol mit einem Zahlenmittel des Molekulargewichts von mindestens 200 und einem Diol ausgewählt ist, das durch folgende allgemeine Formel (IV) dargestellt wird:



in der R³ eine Alkyl-, Alkyliden-, Cycloalkyliden- oder Arylalkylidengruppe mit 2 bis 16 Kohlenstoffatomen ist, und


(d) einer Dicarbonsäure mit 4 bis 20 Kohlenstoffatomen,

wobei der Gehalt der Polyetherestereinheiten auf der Basis des Gewichtes des Polyetheresteramids 10 bis 90 Gew.-% beträgt.

2. Verfahren nach Anspruch 1, wobei die Komponente (a) ε-Caprolactam ist.



3. Verfahren nach Anspruch 1 oder 2, wobei in der durch die Formeln (I), (II) und (III) dargestellten Diolverbindung (b) mindestens einer der Reste R^1 und R^2 eine Ethylenoxidgruppe ist.
4. Verfahren nach Anspruch 1, 2 oder 3, worin in der durch die Formeln (I), (II) und (III) dargestellten Diolverbindung (b) m und n eine ganze Zahl von 1 bis 5 sind.
5. Verfahren nach Anspruch 1, wobei das Diol (b) eine Verbindung ist, die durch die Formel (II) dargestellt wird, worin Y eine $C(CH_3)_2$ -Gruppe ist, λ 0 ist und jedes R^1 und R^2 eine Ethylenamidgruppe ist.
6. Verfahren nach einem der vorstehenden Ansprüche, wobei das Diol (c) ein Poly(alkylenoxid)glycol ist.
7. Verfahren nach Anspruch 6, wobei das Zahlenmittel des Molekulargewichts des Poly(alkylenoxid)-glycols 200 bis 6.000 beträgt.
8. Verfahren nach einem der vorstehenden Ansprüche, wobei die Dicarbonsäure (d) mindestens eine der Verbindungen Terephthalsäure, Isophthalsäure, 1,4-Cyclohexandicarbonsäure, Sebacinsäure, Adipinsäure, Dodecandionsäure und Dodecandicarbonsäure ist.
9. Verfahren nach einem der vorstehenden Ansprüche, wobei der Gehalt der Polyamideinheiten auf der Basis des Gewichtes des Polyetheresteramids 10 bis 80 Gew.-% beträgt.
10. Verfahren zur Herstellung einer transparenten thermoplastischen Harzzusammensetzung, wobei dieses Verfahren das Mischen umfaßt:
 - (A) 1 bis 40 Gew.-% eines transparenten Polyetheresteramids nach einem der vorstehenden Ansprüche, und
 - (B) 99 bis 1 Gew.-% eines Ppropfcopolymerisationsproduktes, das durch Ppropfpolymerisation von (a) 1 bis 80 Gewichtsteilen eines gummiartigen Polymers mit (b) 99 bis 20 Gewichtsteilen einer Monomermischung hergestellt wird, die 100 bis 40 Gew.-% eines aromatischen Vinylmonomers und mindestens eines Monomers, das aus Methacrylsäureester und Acrylsäureester ausgewählt ist, und 0 bis 60 Gew.-% eines Vinylcyanidmonomers umfaßt,
 wobei der Unterschied zwischen den Brechungsindizes der entsprechenden Komponenten (A) und (B) nicht mehr als 0,02 beträgt.
11. Verfahren nach Anspruch 10, das außerdem (C) auf der Basis der gesamten thermoplastischen Harzzusammensetzung bis zu 98 Gew.-% eines modifizierten Vinylpolymers umfaßt, das vom Ppropfcopolymerisationsprodukt (B) verschieden ist, und das mindestens eine funktionelle Gruppe enthält, die aus Carboxyl-, Epoxy- und gegebenenfalls substituierten Aminogruppen der Formel ausgewählt ist:



- worin R^3 Wasserstoff, Methyl oder Ethyl ist und R^4 Wasserstoff, C_{1-12} -Alkyl, C_{2-12} -Alkanoyl, Phenyl oder C_{6-12} -Cycloalkyl und Derivate davon ist, wobei jeder Unterschied zwischen den entsprechenden Brechungsindizes der entsprechenden Komponenten (A) und (B), (A) und (C), und (B) und (C) nicht mehr als 0,02 beträgt.
12. Verfahren nach Anspruch 10 oder 11, wobei der Unterschied zwischen den Brechungsindizes der entsprechenden Komponenten (A) und (B) kleiner als 0,01 ist.
13. Verfahren nach Anspruch 11, wobei jeder der Unterschiede zwischen den entsprechenden Brechungsindizes der entsprechenden Komponenten (A) und (B), (A) und (C), und (B) und (C) kleiner als 0,01 ist.
14. Verfahren nach Anspruch 11 oder 13, wobei das modifizierte Vinylpolymer (C) funktionelle Gruppen enthält, die aus Carboxyl-, Epoxy-, Amino- und substituierten Aminogruppen ausgewählt sind, wobei diese Gruppen in einer Menge von 5×10^{-7} bis 0,5 Mol pro 100 g der gesamten thermoplastischen






Harzzusammensetzung vorhanden sind.

- 5 15. Verfahren nach einem der Ansprüche 10 bis 14, das außerdem (D) auf der Basis der gesamten thermoplastischen Harzzusammensetzung bis zu 98 Gew.-% eines Copolymers umfaßt, das von einer Monomermischung stammt, die 100 bis 40 Gew.-% eines aromatischen Vinylmonomers und mindestens eines Monomers, das aus Methacrylsäureester und Acrylsäureester ausgewählt ist, 0 bis 60 Gew.-% eines Vinylcyanidmonomers und 0 bis 60 Gew.-% eines weiteren copolymerisierbaren monoethylenisch ungesättigten Monomers umfaßt;
10 worin jeder Unterschied zwischen jedem der Brechungsindices der entsprechenden Komponenten (A), (B) und (D) nicht größer als 0,02 ist.
- 15 16. Verfahren nach einem der Ansprüche 10 bis 15, das außerdem (C) auf der Basis der gesamten thermoplastischen Harzzusammensetzung weniger als 98 Gew.-% eines modifizierten Vinylpolymers nach Anspruch 11 und (D) auf der Basis der gesamten thermoplastischen Harzzusammensetzung weniger als 98 Gew.-% eines Copolymers nach Anspruch 16 umfaßt;
wobei jeder Unterschied zwischen jedem der entsprechenden Indices der entsprechenden Komponenten (A), (B), (C) und (D) nicht größer als 0,02 ist.
- 20 17. Verfahren nach Anspruch 15 oder 16, wobei das Gewichtsverhältnis der Komponente (B)/Komponente (D) im Bereich von 2/98 bis 99/1 liegt.
- 25 18. Verfahren zur Herstellung einer transparenten thermoplastischen Harzzusammensetzung, wobei dieses Verfahren umfaßt:
(i) Copolymerisation jeder der Komponenten (a), (b), (c) und (d), die in Anspruch 1 angegeben und definiert sind, wodurch ein transparenter Polyetherester (A) hergestellt wird, und
(ii) Vermischen von 99 bis 1 Gew.-% eines Pfropfcopolymerisationsproduktes (B), das in Anspruch 10 angegeben und definiert ist, mit dem Polyetheresteramid (A), und gegebenenfalls
(iii) Vermischen einer Komponente (C) mit (A) und (B), die in Anspruch 11 angegeben und definiert und in der dort definierten Menge vorhanden ist, und/oder einer Komponente (D), die in Anspruch 15 angegeben und definiert und in der dort definierten Menge vorhanden ist.
- 30

Revendications

Revendications pour les Etats contractants suivants : GB, DE, FR, NL, IT, BE

- 35 1. Polyéther-ester-amide transparent ayant une viscosité relative, mesurée en solution à 0,5% dans l'o-chlorophénol à 25 °C, de 1,1 à 3,5, et formé par copolymérisation:
(a) d'un acide aminocarboxylique comportant au moins 6 atomes de carbone, d'un lactame comportant au moins 6 atomes de carbone ou d'un sel comportant au moins 6 atomes de carbone, ce sel étant synthétisé à partir d'une diamine et d'un acide dicarboxylique,
40 (b) d'au moins un composé diol choisi parmi les composés représentés par les formules (I) à (III) suivantes:
- 45
- 50
- 55

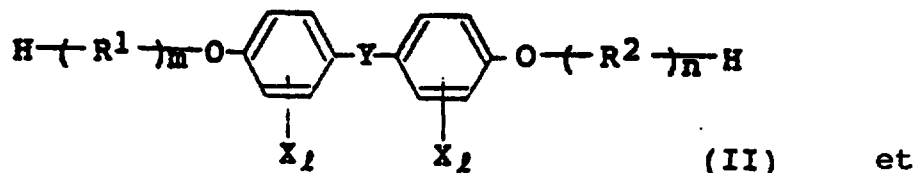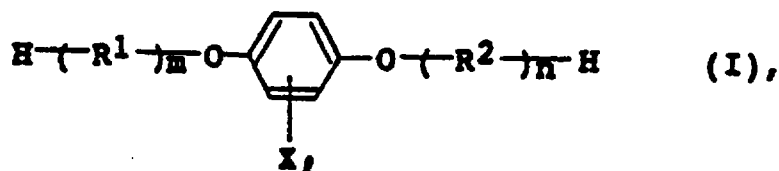

dans lesquelles R¹ et R² désignent indépendamment au moins un groupe oxyde d'éthylène et un groupe oxyde de propylène, Y désigne une liaison covalente, un groupe alkylène comportant 1 à 6 atomes de carbone, un groupe alkylidène comportant 1 à 6 atomes de carbone, un groupe cycloalkylidène comportant 7 à 17 atomes de carbone, un groupe arylalkylidène comportant 7 à 17 atomes de carbone, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ ou NH, X désigne un groupe alkyle comportant 1 à 6 atomes de carbone, un atome d'halogène, un acide sulfonique ou un de ses sels, l est nul ou est un nombre entier de 1 à 4, et m et n désignent un nombre entier de 1 à 15, (c) d'au moins un composé diol choisi parmi un poly(oxyalkylène)glycol, ayant une masse moléculaire moyenne en nombre d'au moins 200, et un diol représenté par la formule générale (IV) suivante:



dans laquelle R³ désigne un groupe alkylène, alkylidène, cycloalkylidène ou arylalkylidène comportant 2 à 16 atomes de carbone, et

(d) d'un acide dicarboxylique comportant 4 à 20 atomes de carbone,

dans lequel la teneur en motifs polyéther-ester est de 10 à 90% en poids, rapportée au poids du polyéther-ester-amide.

2. Polyéther-ester-amide transparent selon la revendication 1, dans lequel le constituant (a) est l'ε-caprolactame.
3. Polyéther-ester-amide transparent selon la revendication 1 ou 2, dans lequel, dans le composé diol (b) représenté par les formules (I), (II) et (III), l'un au moins des radicaux R¹ et R² est un groupe oxyde d'éthylène.
4. Polyéther-ester-amide transparent selon la revendication 1, 2 ou 3, dans lequel, dans le composé diol (b) représenté par les formules (I), (II) et (III), m et n désignent un nombre entier de 1 à 5.
5. Polyéther-ester-amide transparent selon la revendication 1, dans lequel le diol (b) est un composé représenté par la formule (II), dans laquelle Y est un groupe C(CH₃)₂, l est nul et chacun des radicaux R¹ et R² est un groupe oxyde d'éthylène.
6. Polyéther-ester-amide transparent selon l'une quelconque des revendications précédentes, dans lequel le diol (c) est un poly(oxyalkylène)glycol.
7. Polyéther-ester-amide transparent selon la revendication 6, dans lequel la masse moléculaire moyenne en nombre du poly(oxyalkylène)glycol est de 200 à 6 000.
8. Polyéther-ester-amide transparent selon l'une quelconque des revendications précédentes, dans lequel l'acide dicarboxylique (d) est au moins un composé du groupe constitué par l'acide téréphtalique,



l'acide isophthalique, l'acide 1,4-cyclohexane-dicarboxylique, l'acide sébacique, l'acide adipique, l'acide dodécane-dioïque et l'acide dodécane-dicarboxylique.

9. Polyéther-ester-amide transparent selon l'une quelconque des revendications précédentes, dans lequel la teneur en motifs polyamide est de 10 à 80% en poids, rapportée au poids du polyéther-ester-amide.


10. Composition de résine thermoplastique transparente, comprenant:

(A) 1 à 40% en poids d'une polyéther-ester-amide selon l'une quelconque des revendications précédentes; et

(B) 99 à 1% en poids d'un produit de copolymérisation greffé formé par polymérisation par greffage (a) de 1 à 80 parties en poids d'un polymère caoutchouteux avec (b) 99 à 20 parties en poids d'un mélange de monomères comprenant 100 à 40% en poids d'un monomère vinylique aromatique et d'au moins un monomère choisi parmi un ester d'acide méthacrylique et un ester d'acide acrylique, et 0 à 60% en poids d'un monomère cyanure de vinyle,

dans laquelle la différence entre les indices de réfraction des constituants (A) et (B) respectifs ne dépasse pas 0,02.

11. Composition de résine thermoplastique transparente selon la revendication 10, qui comprend aussi (C) jusqu'à 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un polymère vinylique modifié, qui est différent d'un produit de copolymérisation par greffage (B) et qui contient au moins un groupe fonctionnel choisi parmi les groupes carboxyle, époxy et amino éventuellement substitués de formule



dans laquelle R³ est un atome d'hydrogène ou un groupe méthyle ou éthyle, et R⁴ est un groupe alkyle en C₁-C₁₂, alcanoyle en C₂-C₁₂, phényle ou cycloalkyle en C₆-C₁₂ et des dérivés de ceux-ci, dans laquelle chacune des différences entre les indices de réfraction respectifs des constituants (A) et (B), (A) et (C) et (B) et (C) respectifs ne dépasse pas 0,02.

12. Composition de résine thermoplastique transparente selon la revendication 10 ou 11, dans laquelle la différence entre les indices de réfraction des constituants (A) et (B) respectifs est inférieure à 0,01.

13. Composition de résine thermoplastique transparente selon la revendication 11, dans laquelle chacune des différences entre les indices de réfraction respectifs des constituants (A) et (B), (A) et (C) et (B) et (C) respectifs est inférieure à 0,01.

14. Composition de résine thermoplastique transparente selon la revendication 11 ou 13, dans laquelle le polymère vinylique modifié (C) contient des groupes fonctionnels choisis parmi les groupes carboxyle, époxy, amino et amino substitués, ces groupes étant présents à raison de 5 x 10⁻⁷ à 0,5 mole pour 100 g de la composition totale de résine thermoplastique.

15. Composition de résine thermoplastique transparente selon l'une quelconque des revendications 10 à 14, qui comprend aussi (D) jusqu'à 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un copolymère dérivé d'un mélange de monomères comprenant 100 à 40% en poids d'un monomère vinylique aromatique et d'au moins un monomère choisi parmi un ester d'acide méthacrylique et un ester d'acide acrylique, 0 à 60% en poids d'un monomère cyanure de vinyle, et 0 à 60% en poids d'un autre monomère copolymérisable à insaturation monoéthylénique;

dans laquelle chacune des différences entre tous les indices de réfraction, quels qu'ils soient, des constituants (A), (B) et (D) respectifs ne dépasse pas 0,02.

16. Composition de résine thermoplastique transparente selon l'une quelconque des revendications 10 à 15, qui comprend aussi (C) moins de 98% en poids, par rapport à la composition totale de résine



thermoplastique, d'un polymère vinylique modifié, tel que défini dans la revendication 11, et (D) moins de 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un copolymère, tel que défini dans la revendication 16;




dans laquelle chacune des différences entre tous les indices de réfraction, quels qu'ils soient, des constituants (A), (B), (C) et (D) respectifs ne dépasse pas 0,02.

17. Composition de résine thermoplastique transparente selon la revendication 15 ou 18, dans laquelle le rapport pondéral entre le constituant (B) et le constituant (D) se situe dans la gamme de 2/98 à 99/1.

10 Revendications pour l'Etat contractant suivant : ES

1. Procédé de préparation d'un polyéther-ester-amide transparent ayant une viscosité relative, mesurée en solution à 0,5% dans l'o-chlorophénol à 25°C, de 1,1 à 3,5, ce procédé comprenant la copolymérisation:

- (a) d'un acide aminocarboxylique comportant au moins 6 atomes de carbone, d'un lactame comportant au moins 6 atomes de carbone ou d'un sel comportant au moins 6 atomes de carbone, ce sel étant synthétisé à partir d'une diamine et d'un acide dicarboxylique,
(b) d'au moins un composé diol choisi parmi les composés représentés par les formules (I) à (III) suivantes:

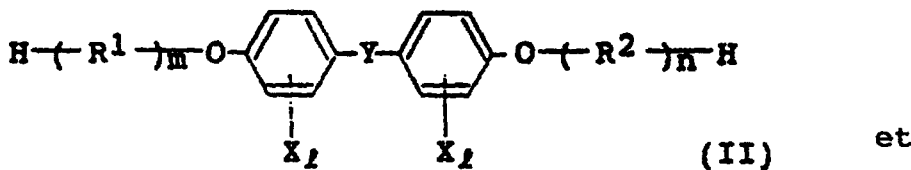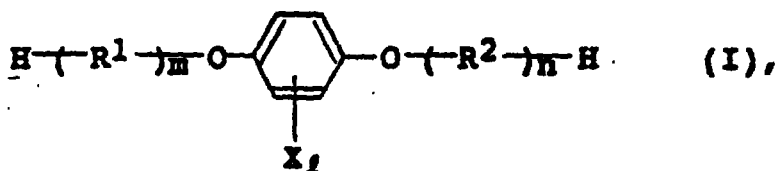

dans lesquelles R¹ et R² désignent indépendamment au moins un groupe oxyde d'éthylène et un groupe oxyde de propylène, Y désigne une liaison covalente, un groupe alkylène comportant 1 à 6 atomes de carbone, un groupe alkylidène comportant 1 à 6 atomes de carbone, un groupe cycloalkylidène comportant 7 à 17 atomes de carbone, un groupe arylalkylidène comportant 7 à 17 atomes de carbone, O, SO, SO₂, CO, S, CF₂, C(CF₃)₂ ou NH, X désigne un groupe alkyle comportant 1 à 6 atomes de carbone, un atome d'halogène, un acide sulfonique ou un de ses sels, l est nul ou est un nombre entier de 1 à 4, et m et n désignent un nombre entier de 1 à 15,

(c) d'au moins un composé diol choisi parmi un poly(oxyalkylène)glycol, ayant une masse moléculaire moyenne en nombre d'au moins 200 et un diol représenté par la formule générale (IV) suivante:



dans laquelle R³ désigne un groupe alkylène, alkylidène, cycloalkylidène ou arylalkylidène comportant 2 à 16 atomes de carbone, et


(d) d'un acide dicarboxylique comportant 4 à 20 atomes de carbone,

dans lequel la teneur en motifs polyéther-ester est de 10 à 90% en poids, rapportée au poids du polyéther-ester-amide.

2. Procédé selon la revendication 1, dans lequel le constituant (a) est l'ε-caprolactame.



3. Procédé selon la revendication 1 ou 2, dans lequel, dans le composé diol (b) représenté par les formules (I), (II) et (III), l'un au moins des radicaux R¹ et R² est un groupe oxyde d'éthylène.
4. Procédé selon la revendication 1, 2 ou 3, dans lequel, dans le composé diol (b) représenté par les formules (I), (II) et (III), m et n désignent un nombre entier de 1 à 5.
5. Procédé selon la revendication 1, dans lequel le diol (b) est un composé représenté par la formule (II), dans laquelle Y est un groupe C(CH₃)₂, l est nul et chacun des radicaux R¹ et R² est un groupe oxyde d'éthylène.
6. Procédé selon l'une quelconque des revendications précédentes, dans lequel le diol (c) est un poly-(oxyalkylène)glycol.
7. Procédé selon la revendication 6, dans lequel la masse moléculaire moyenne en nombre du poly-(oxyalkylène)glycol est de 200 à 6 000.
8. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'acide dicarboxylique (d) est au moins un composé parmi l'acide téréphtalique, l'acide isophtalique, l'acide 1,4-cyclohexane-dicarboxylique, l'acide sébacique, l'acide adipique, l'acide dodécanedioïque et l'acide dodécane-dicarboxylique.
9. Procédé selon l'une quelconque des revendications précédentes, dans lequel la teneur en motifs polyamide est de 10 à 80% en poids, rapportée au poids du polyéther-ester-amide.
10. Procédé de préparation d'une composition de résine thermoplastique transparente, ce procédé comprenant le mélange:
 - (A) de 1 à 40% en poids d'un polyéther-ester-amide selon l'une quelconque des revendications précédentes; et
 - (B) de 99 à 1% en poids d'un produit de copolymérisation greffé formé par polymérisation par greffage (a) de 1 à 80 parties en poids d'un polymère caoutchouteux avec (b) 99 à 20 parties en poids d'un mélange de monomères comprenant 100 à 40% en poids d'un monomère vinylique aromatique et d'au moins un monomère choisi parmi un ester d'acide méthacrylique et un ester d'acide acrylique, et 0 à 60% en poids d'un monomère cyanure de vinyle, dans lequel la différence entre les indices de réfraction des constituants (A) et (B) respectifs ne dépasse pas 0,02.
11. Procédé selon la revendication 10, qui comprend aussi (C) jusqu'à 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un polymère vinylique modifié, qui est différent d'un produit de copolymérisation par greffage (B) et qui contient au moins un groupe fonctionnel choisi parmi les groupes carboxyle, époxy et amino éventuellement substitués de formule



- dans laquelle R³ est un atome d'hydrogène ou un groupe méthyle ou éthyle, et R⁴ est un groupe alkyle en C₁-C₁₂, alcanoyle en C₂-C₁₂, phényle ou cycloalkyle en C₆-C₁₂ et des dérivés de ceux-ci, dans laquelle chacune des différences entre les indices de réfraction respectifs des constituants (A) et (B), (A) et (C) et (B) et (C) respectifs ne dépasse pas 0,02.
12. Composition de résine thermoplastique transparente selon la revendication 10 ou 11, dans laquelle la différence entre les indices de réfraction des constituants (A) et (B) respectifs est inférieure à 0,01.



13. Composition de résine thermoplastique transparente selon la revendication 11, dans laquelle chacune des différences entre les indices de réfraction respectifs des constituants (A) et (B), (A) et (C) et (B) et (C) respectifs est inférieure à 0,01.

5 14. Composition de résine thermoplastique transparente selon la revendication 11 ou 13, dans laquelle le polymère vinylique modifié (C) contient des groupes fonctionnels choisis parmi les groupes carboxyle, époxy, amino et amino substitués, ces groupes étant présents à raison de 5×10^{-7} à 0,5 mole pour 100 g de la composition totale de résine thermoplastique.

10 15. Composition de résine thermoplastique transparente selon l'une quelconque des revendications 10 à 14, qui comprend aussi (D) jusqu'à 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un copolymère dérivé d'un mélange de monomères comprenant 100 à 40% en poids d'un monomère vinylique aromatique et d'au moins un monomère choisi parmi un ester d'acide méthacrylique et un ester d'acide acrylique, 0 à 60% en poids d'un monomère cyanure de vinyle et de
15 0 à 60% en poids d'un autre monomère copolymérisable à insaturations monoéthyléniques.

dans lequel chacune des différences entre tous les indices de réfraction, quels qu'ils soient, des constituants (A), (B) et (D) respectifs ne dépasse pas 0,02.

20 16. Procédé selon l'une quelconque des revendications 10 à 15, qui comprend aussi (C) moins de 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un polymère vinylique modifié, tel que défini dans la revendication 11, et (D) moins de 98% en poids, par rapport à la composition totale de résine thermoplastique, d'un copolymère, tel que défini dans la revendication 16;
dans lequel chacune des différences entre tous les indices de réfraction, quels qu'ils soient, des constituants (A), (B), (C) et (D) respectifs ne dépasse pas 0,02.

25 17. Procédé selon la revendication 15 ou 16, dans lequel le rapport pondéral entre le constituant (B) et le constituant (D) se situe dans la gamme de 2/98 à 99/1.

30 18. Procédé de préparation d'une composition de résine thermoplastique transparente, ce procédé comprenant:

(i) la copolymérisation de chacun desdits constituants (a), (b), (c) et (d), indiqués et définis dans la revendication 1, pour produire un polyéther-ester-amide transparent (A), et

(ii) le mélange, avec ledit polyéther-ester-amide transparent (A), de 99 à 1% en poids d'un produit de copolymérisation greffé (B), indiqué et défini dans la revendication 10, et, éventuellement,

35 (iii) le mélange, avec (A) et (B), d'un constituant (C), indiqué et défini dans la revendication 11, et présent dans la proportion indiquée dans cette dernière, et/ou d'un constituant (D), indiqué et défini dans la revendication 15, et présent dans la proportion indiquée dans cette dernière.

40

45

50

55