



(51) International Patent Classification:
H04L 1/00 (2006.01)

(21) International Application Number:
PCT/US2012/071055

(22) International Filing Date:
20 December 2012 (20.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

61/581,254	29 December 2011 (29.12.2011)	US
61/591,530	27 January 2012 (27.01.2012)	US
61/605,900	2 March 2012 (02.03.2012)	US
61/648,510	17 May 2012 (17.05.2012)	US
61/691,066	20 August 2012 (20.08.2012)	US
61/731,426	29 November 2012 (29.11.2012)	US
13/691,056	30 November 2012 (30.11.2012)	US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
Attn: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).

(72) Inventors: **MERLIN, Simone**; 5775 Morehouse Drive,
San Diego, California 92121-1714 (US). **ABRAHAM,**

Santosh Paul; 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **WENTINK, Maarten Menzo**; 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **QUAN, Zhi**; 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **ASTERJADHI, Alfred**; 5775 Morehouse Drive, San Diego, California 92121-1714 (US).

(74) Agent: **BELADI, Sayed H.**; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121-1714 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR GENERATING AND DECODING SHORT CONTROL FRAMES IN WIRELESS COMMUNICATIONS

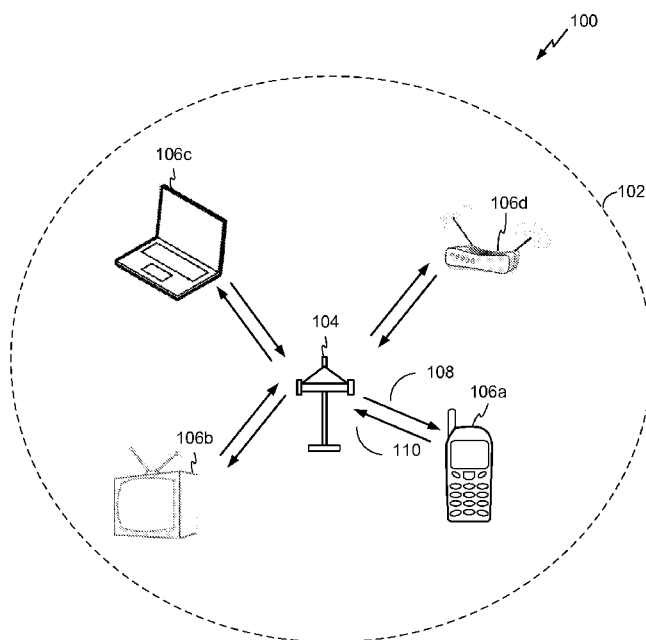


FIG. 1

(57) Abstract: Systems, methods, and devices for communicating short control frames are described herein. In some aspects, a method of wireless communication includes generating a control frame comprising a physical layer preamble having a signal field, the signal field including an indicator indicating the control frame is a control frame type of frame. The method further includes transmitting the control frame.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*