



- (51) **International Patent Classification:**
F16K 17/04 (2006.01) *F16K 27/02* (2006.01)
- (21) **International Application Number:**
PCT/US2012/067516
- (22) **International Filing Date:**
3 December 2012 (03.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/569,505 12 December 2011 (12.12.2011) US
- (71) **Applicant:** CARRIER CORPORATION [US/US]; One Carrier Place, Farmington, Connecticut 06034 (US).
- (72) **Inventors; and**
- (71) **Applicants (for US only):** KONDRK, Jason R. [US/US]; 5010 Dongara Lane, Clay, New York 13041 (US). AS-PROVSKI, Zvonko [US/US]; 7730 Treeline Drive, Liverpool, New York 13090 (US).
- (74) **Agent:** HABELT, William W.; Cantor Colburn LLP, 20 Church Street, 22nd Floor, Hartford, Connecticut 06103 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

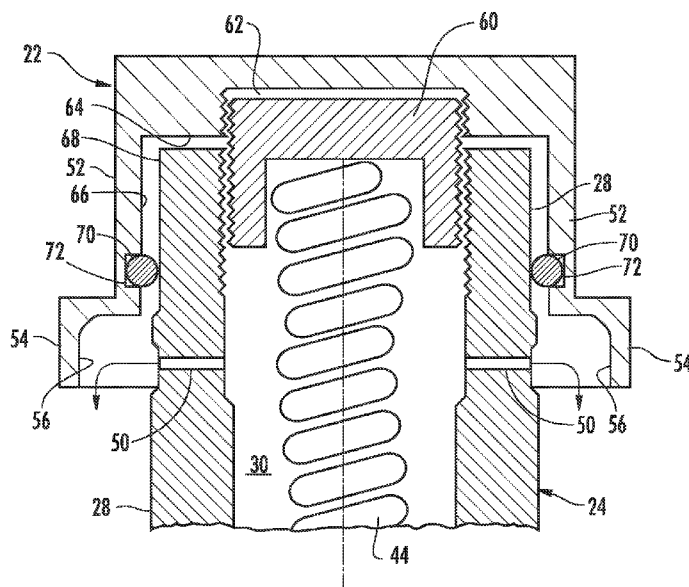
(54) **Title:** PRESSURE RELIEF VALVE WITH PROTECTIVE CAP

FIG. 3

(57) **Abstract:** A pressure relief valve (20) for use in connection with a high pressure fluid system has a protective cap (22) for limiting the exposure of personnel to high pressure fluid venting from the pressure relief valve. In an embodiment, the protective cap includes a cylindrical cap body (52) mounted to a distal end (28) of the valve body (24) of the pressure relief valve and a skirt flange (54) extending circumferentially about an open end of the cap body for deflecting the streams of high pressure fluid venting from the pressure relief valve away from an outwardly directed path. A circumferential seal body (70) may be disposed between an inner circumferential surface (66) of the cap body and an outer circumferential surface (68) of the distal end of the valve body.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*