

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 June 2009 (18.06.2009)

PCT

(10) International Publication Number
WO 2009/075809 A1

(51) International Patent Classification:
F16B 2/22 (2006.01)

(21) International Application Number:
PCT/US2008/013468

(22) International Filing Date:
8 December 2008 (08.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/007,005 10 December 2007 (10.12.2007) US

(71) Applicants and

(72) Inventors: **VERMILLION, Kenneth, B.** [US/US]; 1406 East Houston St., Highlands, TX 77562 (US). **VERMILLION, Bradley, N.** [US/US]; 1406 East Houston St., Highlands, TX 77562 (US).

(74) Agent: **CASPERSON, John, R.**; P.o Box 36369, Pensacola, FL 32516 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: CLIP

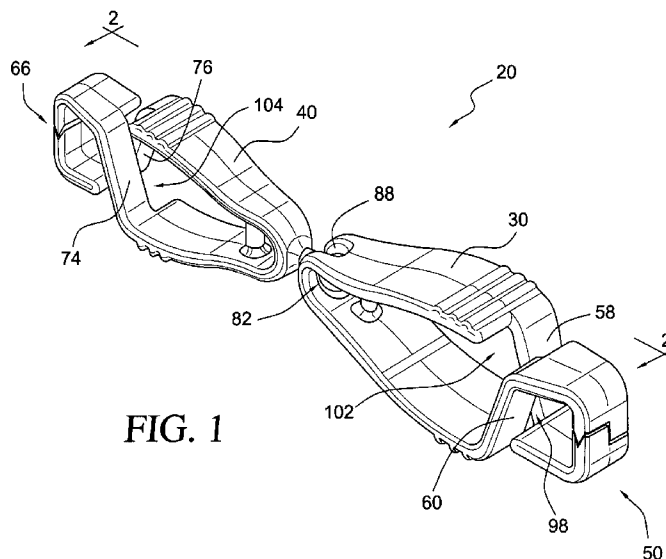


FIG. 1

(57) Abstract: A clip assembly is disclosed in which the clip ends have rotational freedom and limited radial freedom. The clip assembly comprises a first resilient clip member and a second resilient clip member, each having an opposed jaw end and a bridged back end. The first resilient clip member further defines a slot extending across the bridged back end. The second resilient clip member defines a post having an enlarged spherical head extending longitudinally from the bridged back end. The head of the post has a diameter which is slightly greater than the width of the slot. The second clip member is connected to the first clip member for rotational freedom of movement around the longitudinal axis of the clip by receipt of the spherical head through the slot.