

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
17 September 2020 (17.09.2020)



(10) International Publication Number
WO 2020/185208 A1

(51) International Patent Classification:
E21B 43/10 (2006.01) *E21B 23/01* (2006.01)

(21) International Application Number:
PCT/US2019/021664

(22) International Filing Date:
11 March 2019 (11.03.2019)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).

(72) Inventors: **ZHONG, Xiaoguang Allan**; 3625 Neiman Road, PLANO, Texas 75025 (US). **GHARESI, Abdolreza**; 107 Harvard Drive, Southlake, Texas 76092 (US). **YIN, Shengjun**; 5474 Beacon Hill Dr., Frisco, Texas 75036 (US).

(74) Agent: **TUMEY, Corey S.**; P.O. Box 890226, Houston, Texas 77062-9998 (US).

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: MINIMIZE TRAPPED FLUID IMPACT ON EXPANDABLE LINER HANGERS IN GEOTHERMAL APPLICATIONS

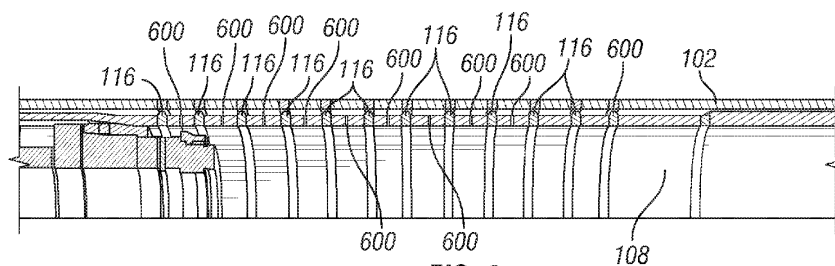


FIG. 6

(57) Abstract: A system and method for performing subterranean operations. The system may comprise an expandable liner hanger positioned within a casing string, wherein the expandable liner hanger comprises a spiked portion having one or more anchoring ridges, each of the one or more anchoring ridges extending in a circular ring along an outer perimeter of the expandable liner hanger, and one or more weep holes are positioned in a space between adjacent ones of the one or more anchoring ridges. The method for coupling a liner to a casing string of a cased wellbore in a subterranean formation may comprise coupling an expandable liner hanger to the liner, inserting the liner and the expandable liner hanger downhole through the casing string, and expanding the plurality of anchoring ridges.



WO 2020/185208 A1