

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 October 2006 (19.10.2006)

PCT

(10) International Publication Number
WO 2006/110541 A2

(51) International Patent Classification:
B67D 5/60 (2006.01)

(21) International Application Number:
PCT/US2006/013058

(22) International Filing Date: 10 April 2006 (10.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/669,945 8 April 2005 (08.04.2005) US
11/400,034 7 April 2006 (07.04.2006) US

(71) Applicant (for all designated States except US): **ENTEGRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska, Minnesota 55318 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HENNEN, John, M.** [US/US]; 736 Debbie Lane, Carver, Minnesota 55315 (US). **RAUWORTH, Barry, L.** [US/US]; 16230 94th Street, Young America, Minnesota 55397 (US). **LINDER,**

James, C. [US/US]; 6150 Strewberry Lane, Shorewood, Minnesota 55331 (US).


(74) Agents: **CHRISTENSEN, Douglas** et al.; PATTERSON, THUENTE, SKAAR & CHRISTENSEN, P.A., 4800 IDS Center, 80 South Eighth Street, Minneapolis, Minnesota 55402-2100 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: HIGH-VOLUME FLUID DISPENSE SYSTEM

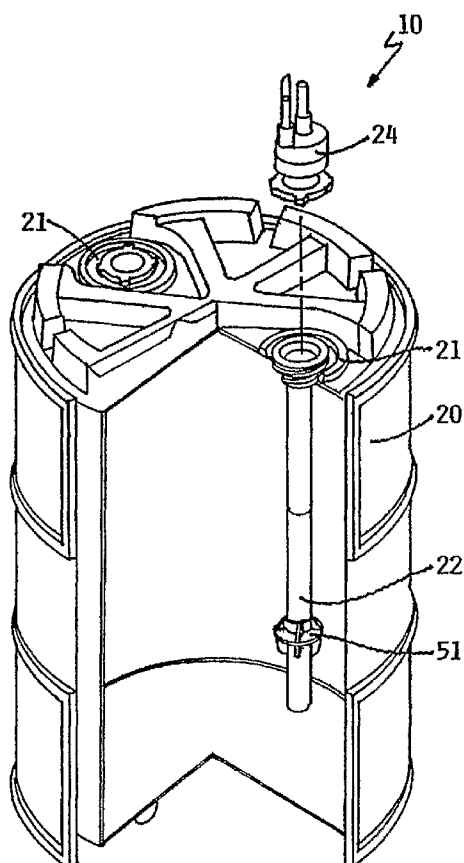

(57) Abstract: A fluid dispense system for use with a drum having a drum insert configured to couple with a bung included on a drum, the drum insert having an upper portion and a drum insert down tube extending therefrom into an interior of the drum. The system further having a dispense head configured to couple with the drum insert, the dispense head having first and second conduits, each having a valve assembly, the valve assemblies in operable communication with the drum insert when the dispense head is coupled with the drum insert. When the dispense head is coupled with the drum insert the first and second valve assemblies are effected to an open position enabling fluid to flow through the conduits. When the dispense head is not coupled with the drum insert the first and second valve assemblies are biased to a closed position inhibiting fluid from flowing through the conduits.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*