

(51) International Patent Classification:
C10L 1/00 (2006.01)

(21) International Application Number:

PCT/US2012/022602

(22) International Filing Date:

25 January 2012 (25.01.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/071,038	24 March 2011 (24.03.2011)	US
13/071,016	24 March 2011 (24.03.2011)	US

(71) Applicant (for all designated States except US): **COOL PLANET BIOFUELS, INC.** [US/US]; 460 Calle San Pablo, Camarillo, CA 93012 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHEIKY, Michael** [US/US]; 3302 Bordero Lane, Thousand Oaks, CA 93012 (US). **RAJASHEKHARAM, Malyala** [US/US]; 494 Vista Del Sol, Camarillo, CA 93010 (US).(74) Agent: **HEISEY, David, E.**; Sheppard Mullin Richter & Hampton LLP, 12275 El Camino Real, Suite 200, San Diego, CA 92130 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR MAKING RENEWABLE FUELS

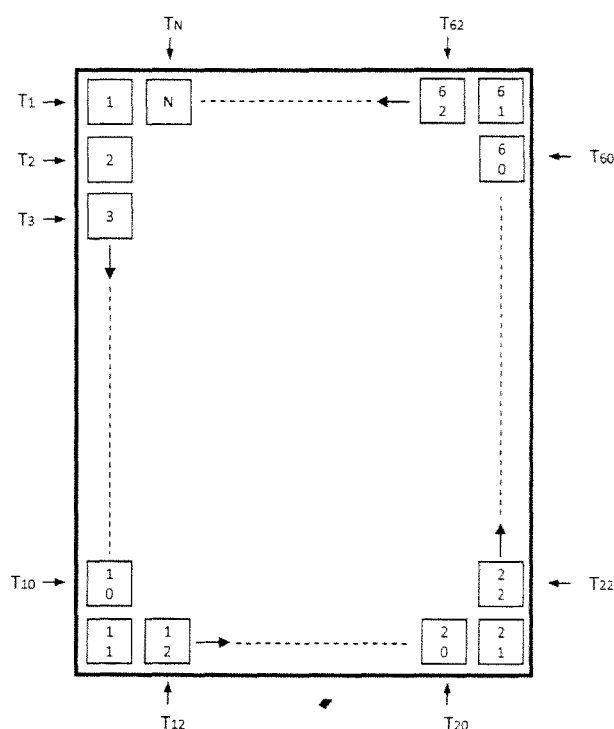


FIG. 1

(57) Abstract: Multiple catalytic processing stations enable a method for producing volatile gas streams from biomass decomposition at discrete increasing temperatures. These catalytic processing stations can be programmed to maximize conversion of biomass to useful renewable fuel components based on input feedstock and desired outputs.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, (88) Date of publication of the international search report:
GW, ML, MR, NE, SN, TD, TG). 10 April 2014

Published:

— with international search report (Art. 21(3))