

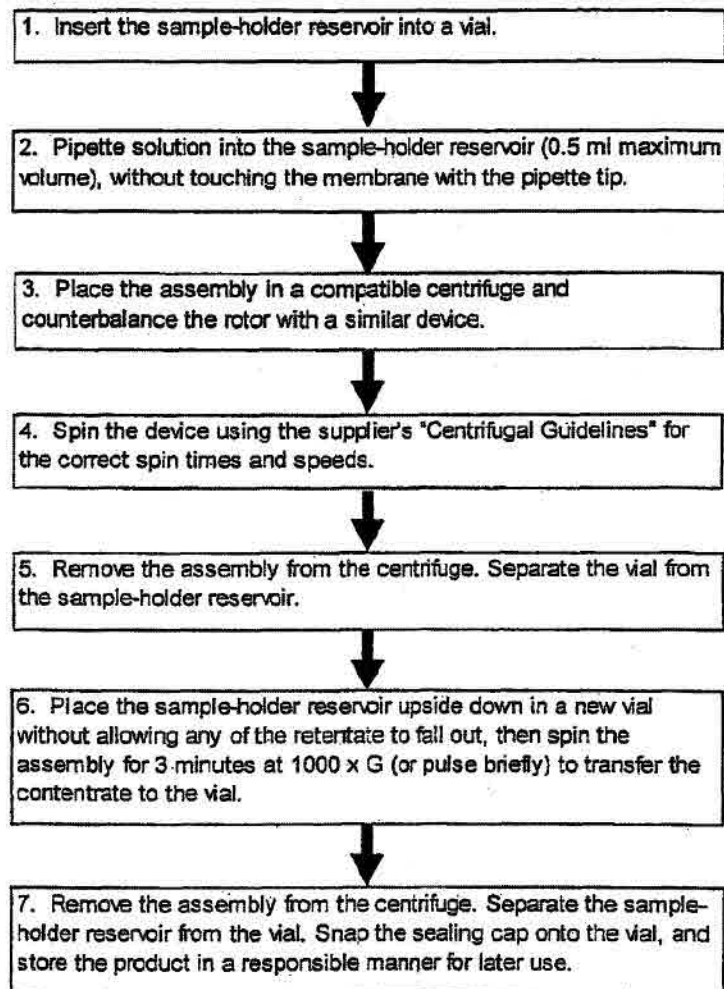


FIG. 1

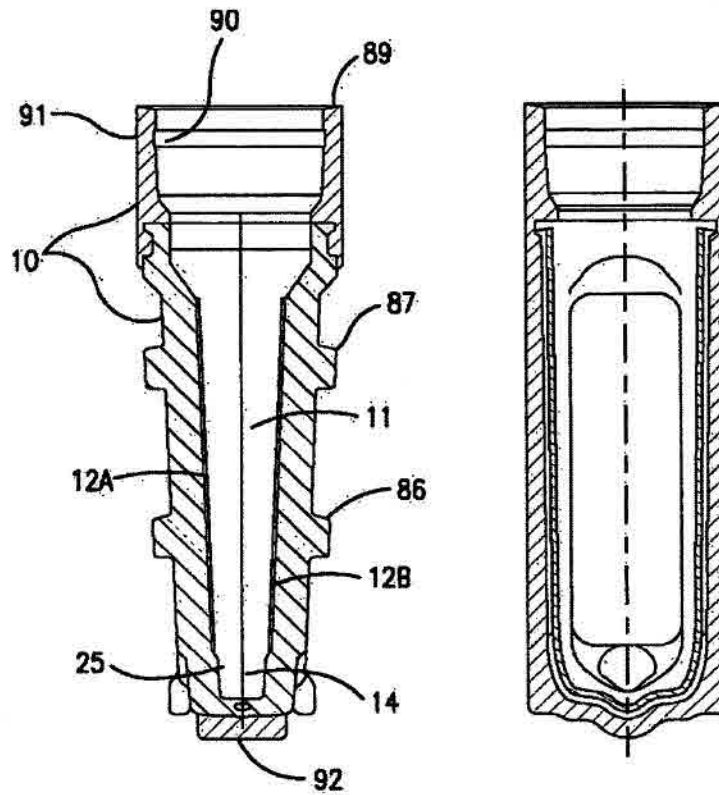


FIG. 2

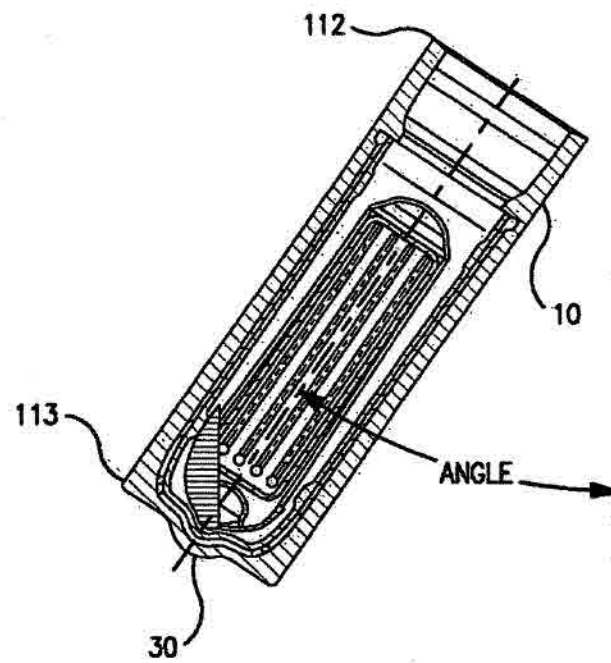
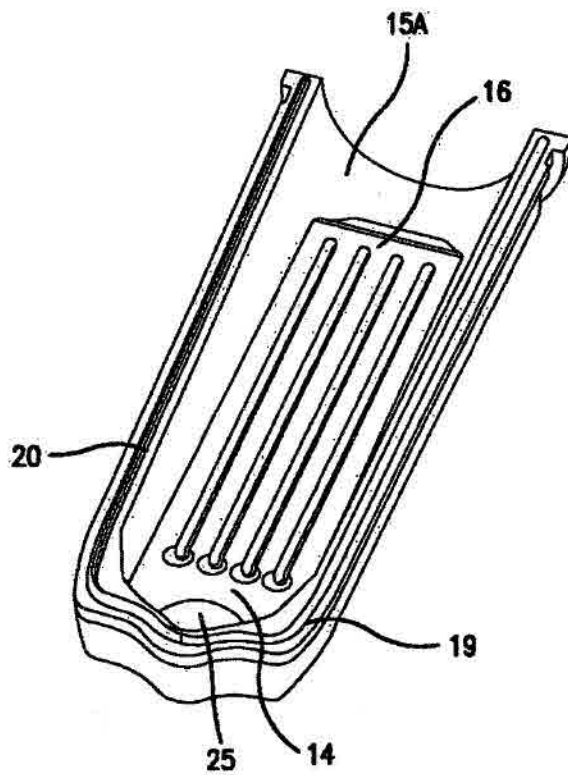
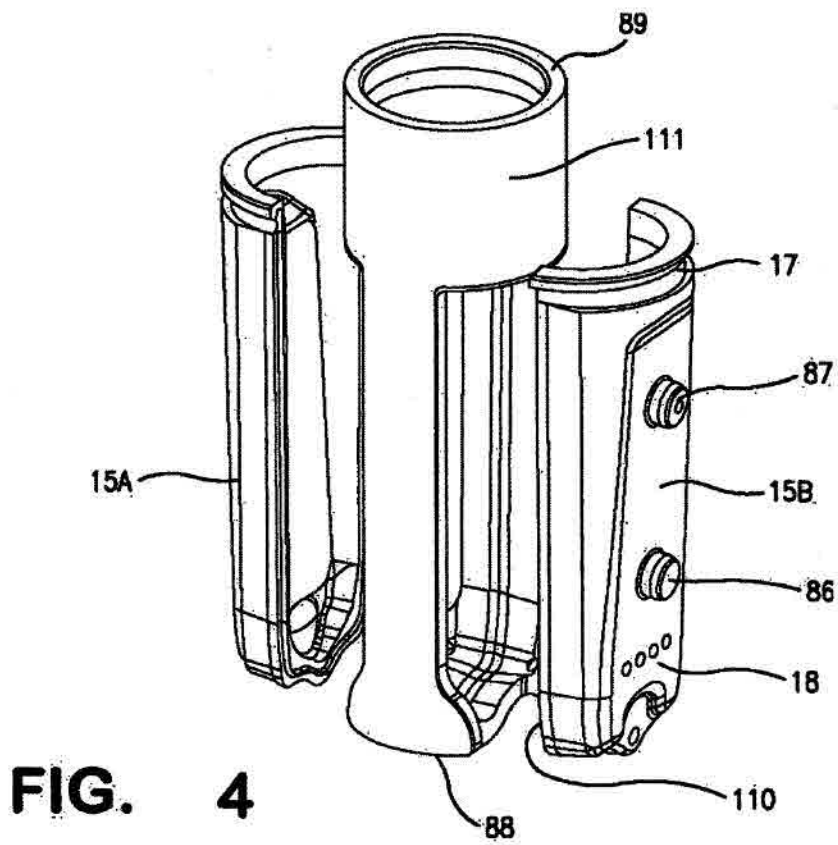


FIG. 3



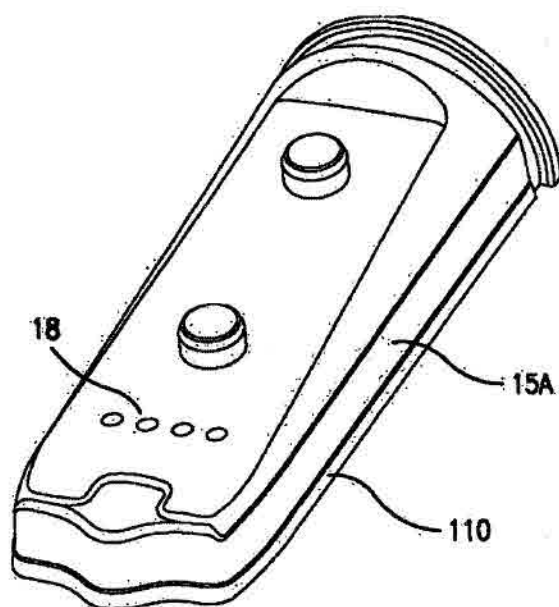


FIG. 6

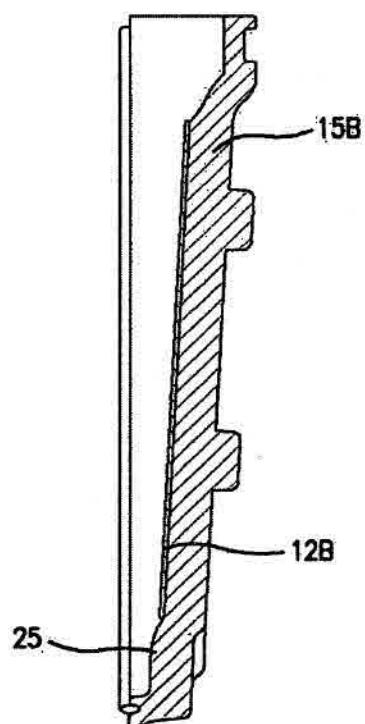


FIG. 7

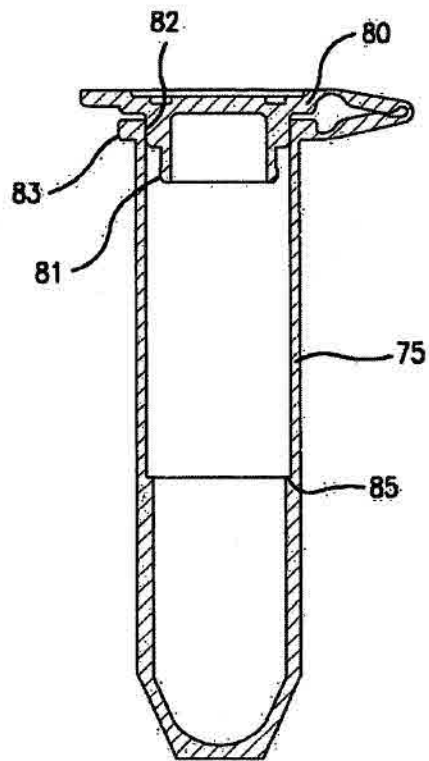


FIG. 8

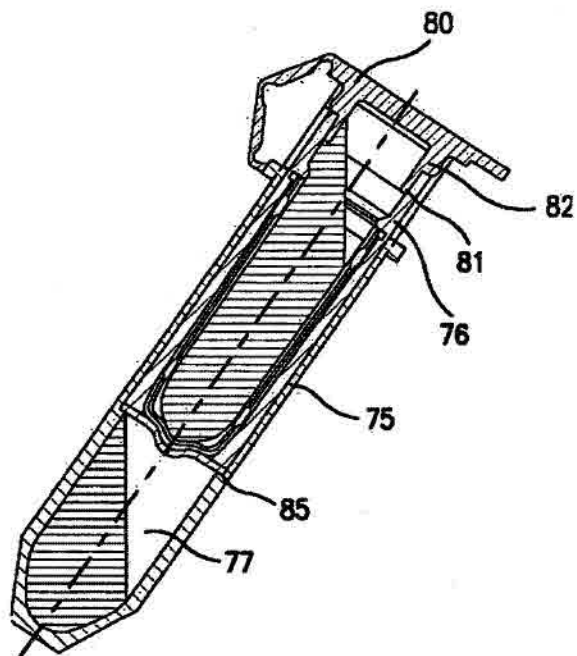


FIG. 9

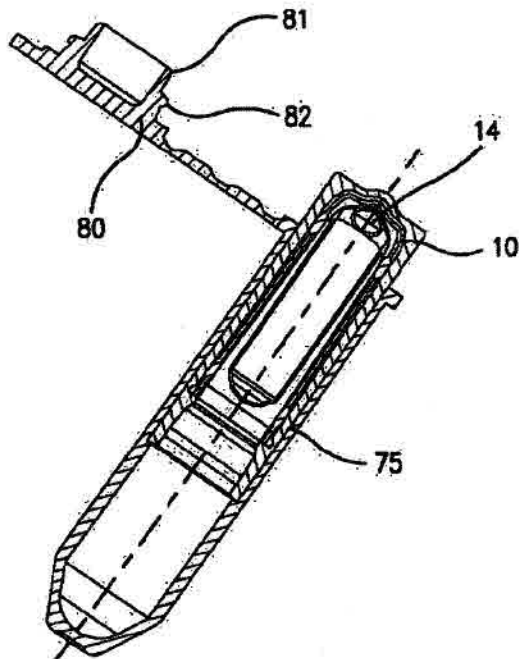


FIG. 10

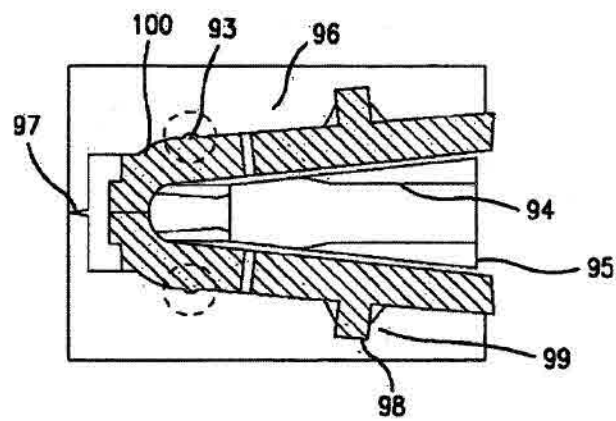


FIG. 11

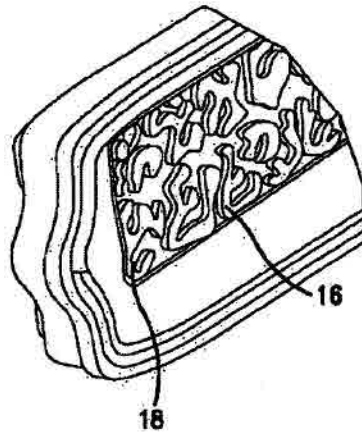


FIG. 12

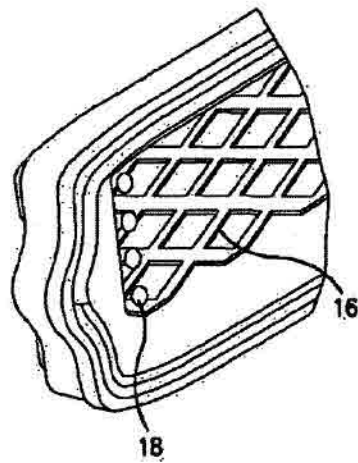


FIG. 13

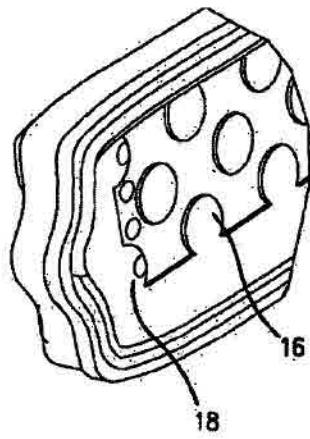


FIG. 14

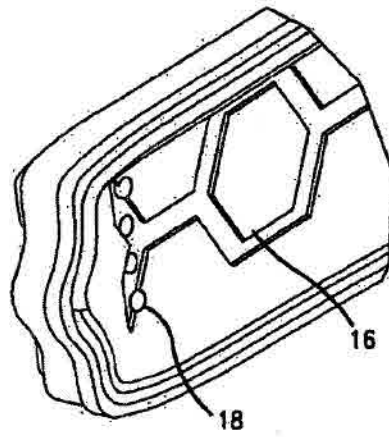


FIG. 15

AUD5 PTI Rev6 Panels 500 ul Volume @ 14,000g Water Flux
Curves

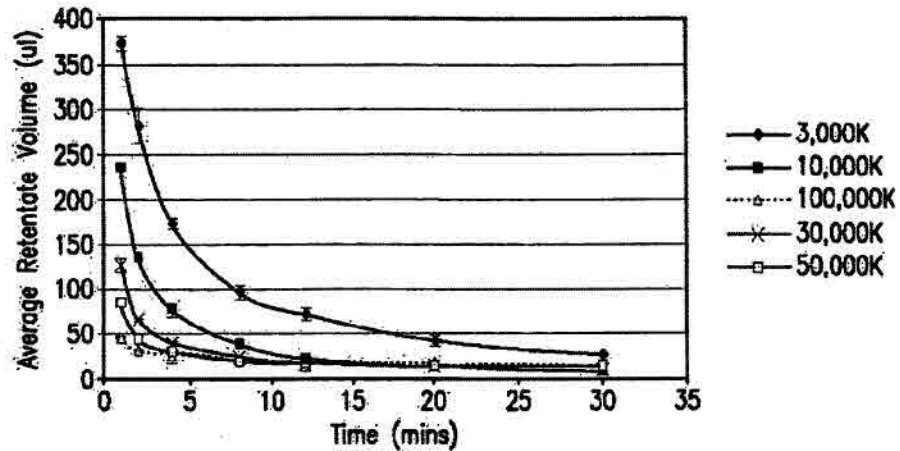


FIG. 16

Retentate Volumes for Water Tested AU05 and Microcon 30K & 50K Devices with and without Reverse Spin

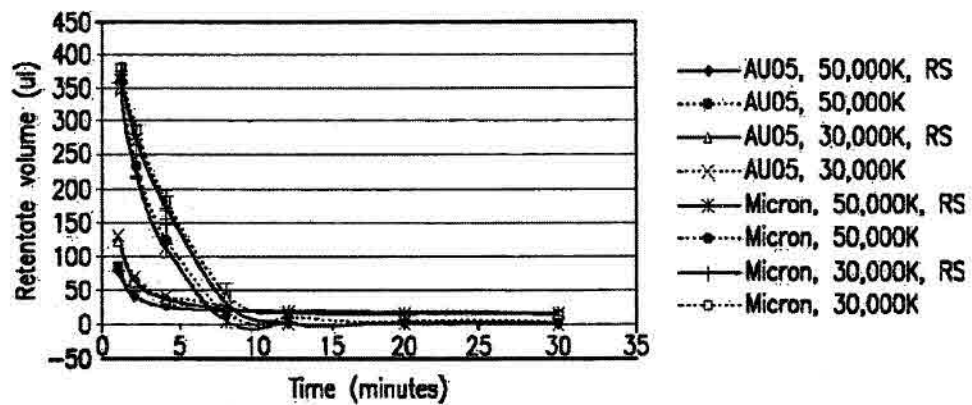
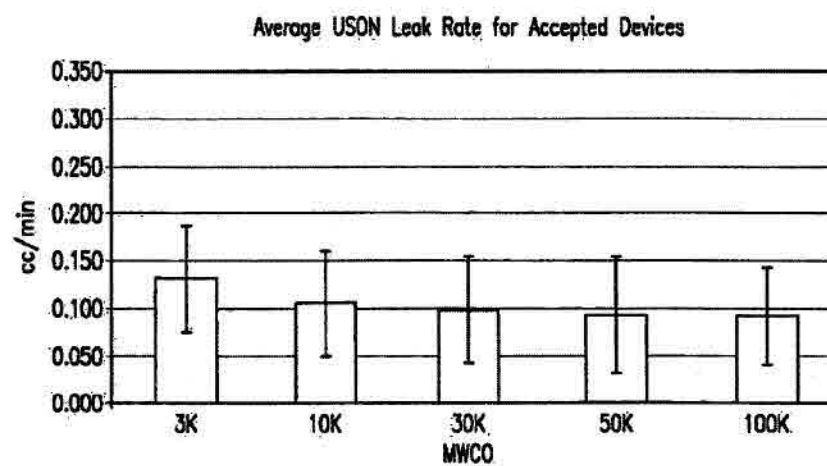
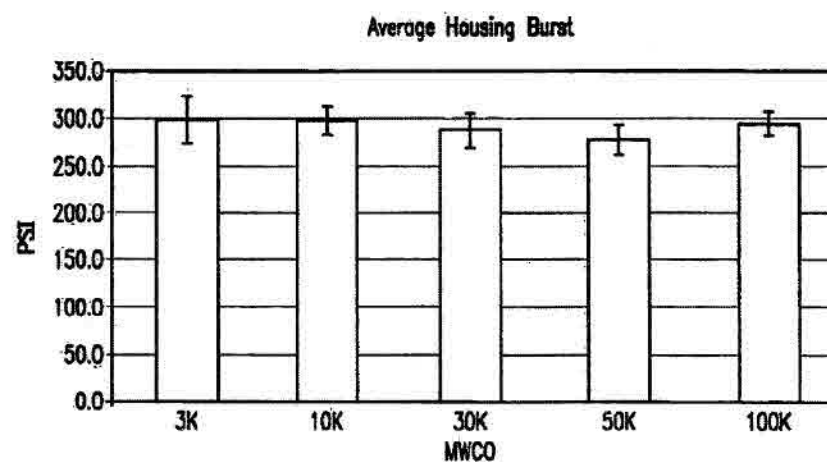
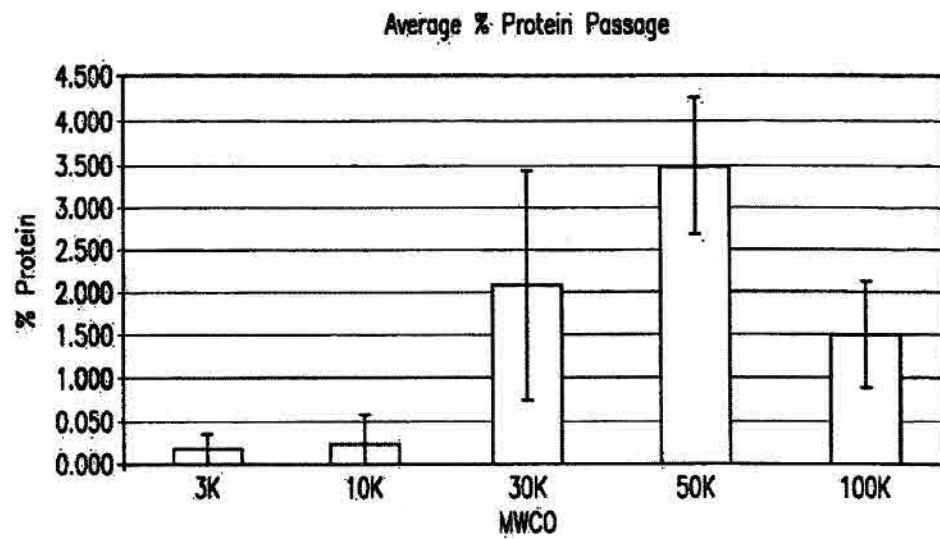
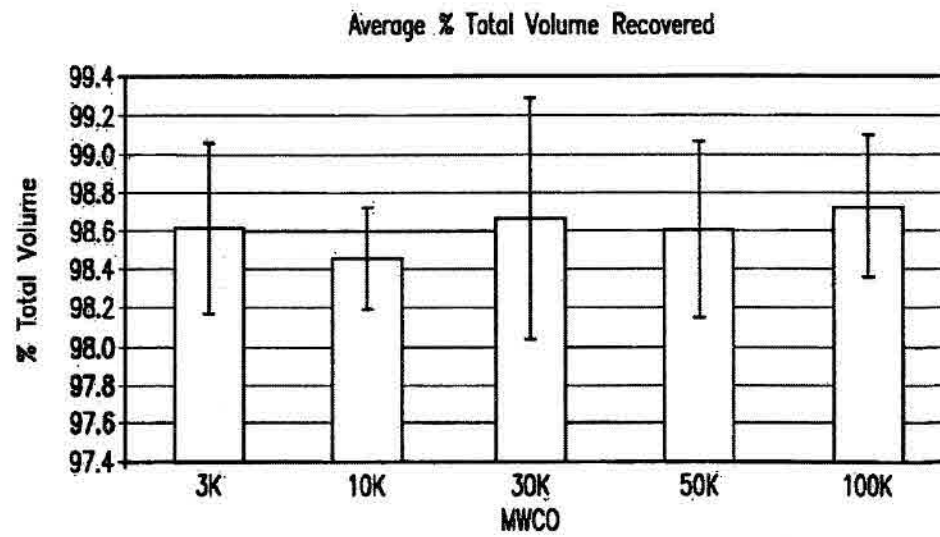
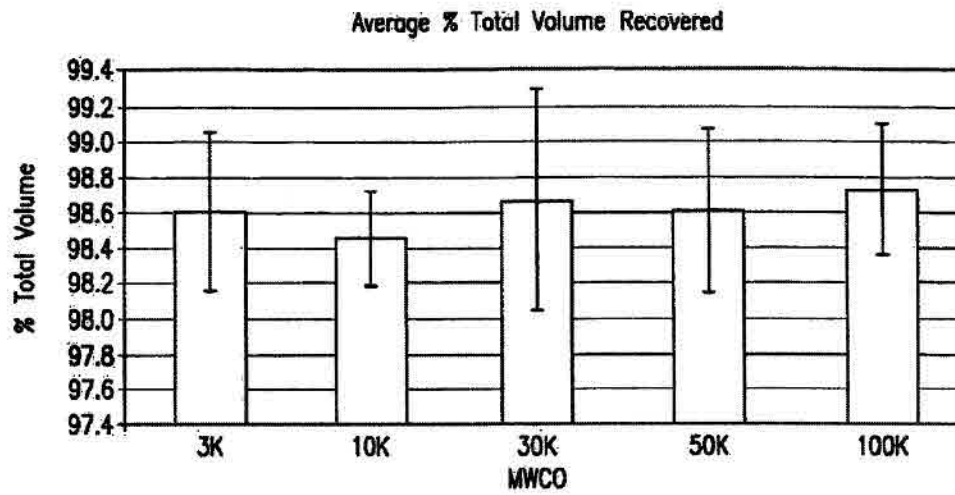
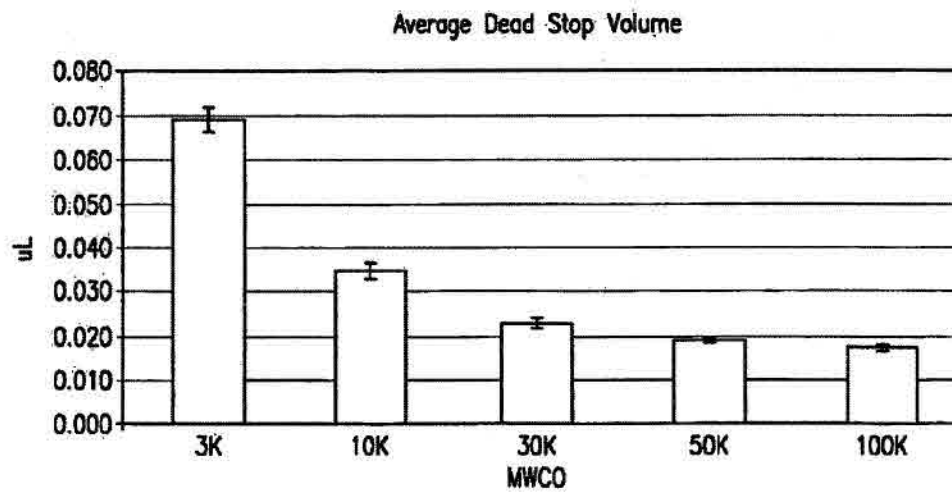
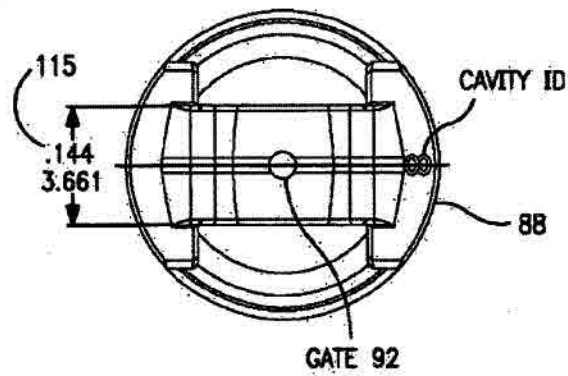
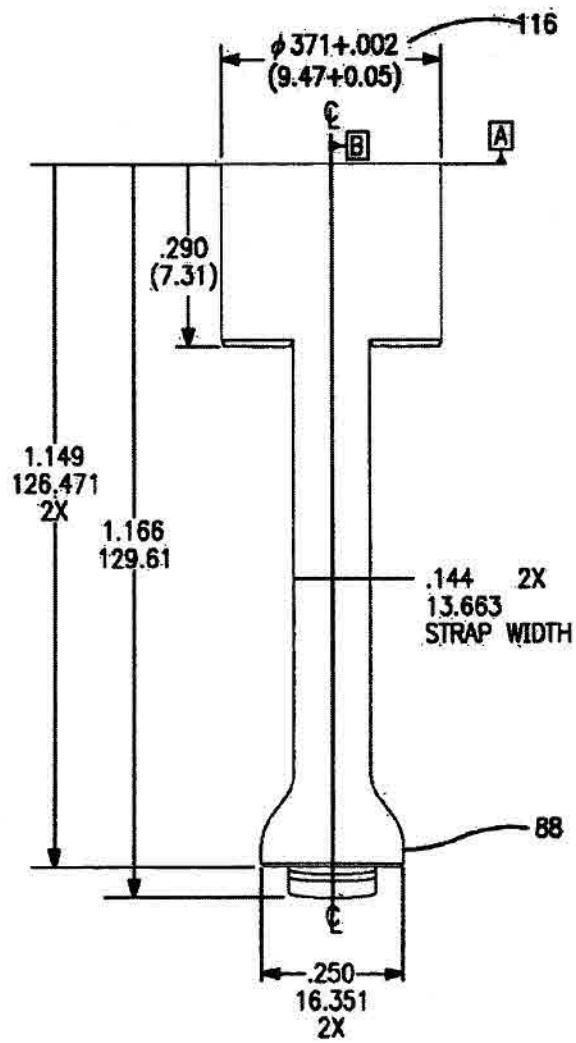


FIG. 17

**FIG. 18****FIG. 19**

**FIG. 20****FIG. 21**

**FIG. 22****FIG. 23**

**FIG. 24****FIG. 25**

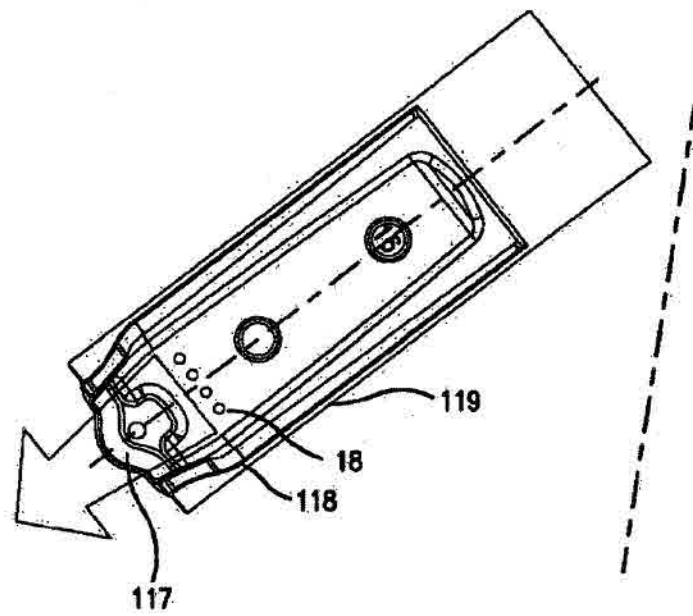


FIG. 26

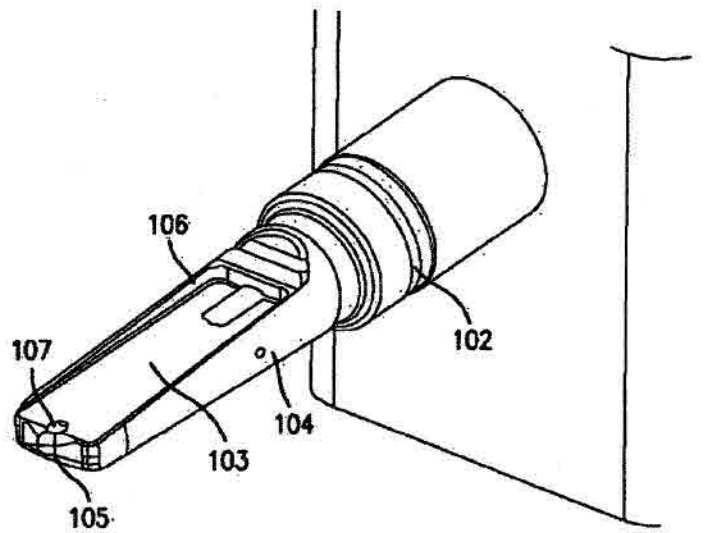


FIG. 27

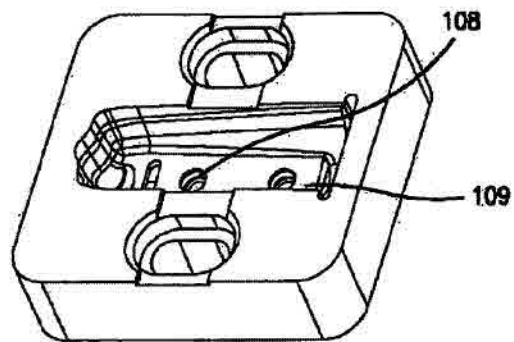


FIG. 28