

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 September 2019 (12.09.2019)



(10) International Publication Number
WO 2019/172940 A1

(51) International Patent Classification:

A61F 9/00 (2006.01) A61M 5/315 (2006.01)
A61F 9/007 (2006.01) A61M 5/32 (2006.01)
A61M 5/158 (2006.01)

(21) International Application Number:

PCT/US2018/021866

(22) International Filing Date:

09 March 2018 (09.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: AQUESYS, INC. [US/US]; Morris Corporate Center III, 400 Interpace Parkway, Parsippany, New Jersey 07054 (US).

(72) Inventors: ROMODA, Laszlo O.; 13 Via Fontibre, San Clemente, California 92673 (US). HORVATH, Christo-

pher; 24221 Robledo Circle, Mission Viejo, California 92691 (US).

(74) Agent: SMITH, Nathan S.; Morgan, Lewis & Bockius LLP, 600 Anton Boulevard, Suite 1800, Costa Mesa, California 92626-7653 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: INTRAOCULAR SHUNT INSERTER

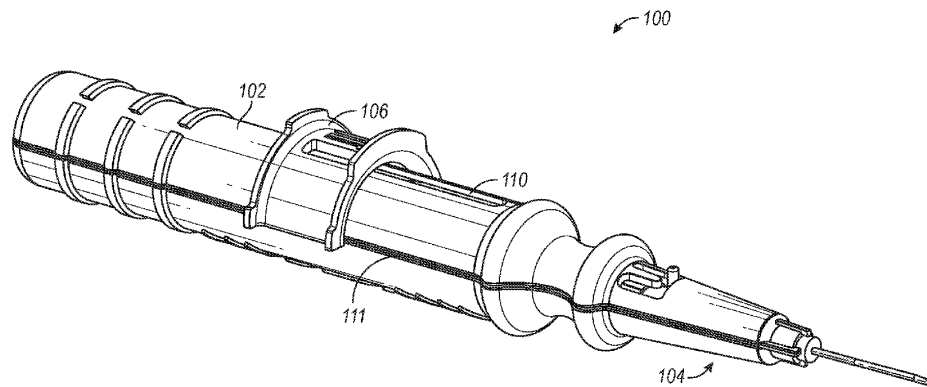


FIG. 1B

(57) Abstract: An inserter can include a housing and a slider component. The slider component can be coupled to the housing and positioned along an outer surface thereof. The slider component can be slidable along an elongate slot of the housing and include a guide tab disposed within a guide channel of the housing body. The slider can include a friction tab having a biasing member configured to urge against the housing body to urge the guide tab against a wall of the guide channel. Further, a deflector component can be provided that includes a needle guide configured to receive the needle of the inserter therein. The deflector component can be removably coupled to the inserter in order to permit the needle guide to bend the needle and maintain the needle in a bended configuration.

[Continued on next page]

WO 2019/172940 A1

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))