



G00002

1
STROLLER FOLDABLE IN THREE



187187

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a stroller foldable in three and, more particularly, to a stroller foldable in three having a folding body, and a retaining mechanism, for retaining the folding body in a folded state, capable of being easily disengaged.

10 Description of the Related Art

There have been proposed various folding strollers for carrying a baby outdoors for walking or shopping, capable of being folded in three and of being held in a folded state to facilitate storing and carrying.

15 Such a folding stroller has a folding body and a retaining mechanism. The folding body is folded in three and is retained in a folded state by the retaining mechanism. Although the retaining mechanism has a reliable strength and rigidity because the retaining mechanism is combined with the folding
20 body, the user of the stroller needs to take the hands off the handle of the stroller to disengage the retaining mechanism because the retaining mechanism is apart from the user's hands.

SUMMARY OF THE INVENTION

25 Accordingly, it is an object of the present invention to provide a stroller foldable in three capable of being unfolded by operating an operating mechanism disposed close at hand.

30 According to the present invention, a stroller foldable in three includes: a pair of front legs, a pair of rear legs, a handle having two side parts respectively connected to the pair of rear legs, and first and second side connecting bars connecting the pair of front legs and lower end parts of the side parts of the handle; wherein the first side connecting
35 bar is provided with a hook, the second side connecting bar is provided with an engagement device with which the hook engages, an operating mechanism is combined with the handle,

the operating mechanism is interlocked with the hook, and the hook can be disengaged from the engagement device by operating the operating mechanism.

5 In the stroller foldable in three according to the present invention, a slider is mounted for axial movement on a lower end part of the side part of the handle on the side of the first side connecting bar, the operating mechanism and the slider are connected by a first wire, and the slider and the hook are connected by a second wire.

10 In the stroller foldable in three according to the present invention, a frame cover for guiding the second wire to the first side connecting bar is disposed between the first side connecting bar and the lower end part of the side part of the handle, and the second wire is extended along the first
15 side connecting bar.

In the stroller foldable in three according to the present invention, a rocker ring for guiding the second wire to the hook is disposed near the hook.

20 In the stroller foldable in three according to the present invention, an upper connecting bar is extended between the first and the second side connecting bars, and the rocker ring is mounted on the upper connecting bar.

25 In the stroller foldable in three according to the present invention, the hook has a nose that engage with the engagement device, and the hook is supported pivotally on the first side connecting bar.

In the stroller foldable in three according to the present invention, the hook is urged in an engaging direction to engage with the engagement device by a spring.

30 In the stroller foldable in three according to the present invention, brackets and locking members are placed between the pair of rear legs and the handle, the slider is connected to the locking member on the side of one of the rear legs, and the locking member is disengaged from the
35 corresponding brackets by moving the slider.

In the stroller foldable in three according to the present invention, the slider and the locking member are

interlocked by a pin attached to the slider so as to extend perpendicularly to the axis of the side part of the handle.

In the stroller foldable in three according to the present invention, the side part of the handle is provided
5 with an axial slot, and the pin moves along the slot.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic perspective view of a stroller foldable in three in a preferred embodiment according to the
10 present invention;

Fig. 2 is a fragmentary perspective view of a handle and a side connecting bar;

Fig. 3 is a side elevation of the handle and the side connecting bar;

15 Fig. 4 is a sectional view taken on line A-A in Fig. 3;

Fig. 5 is a sectional view of a hook;

Fig. 6 is a perspective view of a stroller in a comparative example;

20 Fig. 7 is the stroller shown in Fig 1 folded in three; and

Fig. 8 is a view of assistance in explaining a retaining mechanism in a state where the stroller is folded in three.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A stroller foldable in three in a preferred embodiment according to the present invention will be described with reference to Figs. 1 to 5.

Referring to Fig. 1 showing the stroller foldable in three in the preferred embodiment in a perspective view, the
30 stroller has two front legs (right and left front legs) 12 provided with front wheels 11, two rear legs (right and left rear legs) 14 provided with rear wheels 13, a substantially U-shaped handle 15, two armrests (right and left armrests)
35 16, and a detachable guard arm 17 (Fig. 6) extended between the armrests 16. The handle 15 has right and left side parts 15a, 15a. Rear ends of the armrests 16 are pivotally joined

to parts near the lower ends of the right and the left side parts 15a, 15a of the handle 15, respectively. The upper end parts of the front legs 12 are pivotally joined to front end parts of the armrests 16, respectively. Upper end parts of the rear legs 14 are pivotally joined to middle parts of the armrests 16, respectively. Lower ends of L-shaped brackets 19 are pivotally joined to middle parts of the rear legs 14, respectively. Lower ends of the side parts of the handle 15 are pivotally joined to middle parts of the brackets 19, respectively. When the stroller is unfolded, locking members 20 slidably mounted on lower end parts of the side parts of the handle 15 engage with locking parts formed in the upper ends of the brackets 19, respectively, to retain the stroller in an unfolded state.

The right and the left front legs 12 are connected by a front connecting bar 21, and the right and the left rear legs 14 are connected by a rear connecting bar 22. Front ends of side connecting bars (first and second connecting bars) 23a and 23b are pivotally joined to middle parts of the front legs 12, respectively, and the rear ends of the side connecting bars 23a and 23b are pivotally joined, together with the brackets 19, to the lower end parts of the side parts 15a, 15a of the handle 15, respectively. Middle parts of the side connecting bars 23a and 23b are connected by an upper connecting bar 24.

The locking members 20 put on the lower end parts of the side parts of the handle 15 are engaged with the upper locking parts of the brackets 19 to retain the stroller in the unfolded state for use. An operating mechanism 25 combined with the handle 15 is operated to disengage the locking members 20 from the brackets 19. When the locking members 20 are disengaged from the brackets 19, the armrests 16 and the side connecting bars 23a and 23b are allowed to turn upward on the pivotal joints on the side parts 15a, 15a of the handle 15, so that the front legs 12 and the rear legs 14 can be folded so as to extend substantially parallel to each other to facilitate carrying the stroller.

The handle 15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar 24 have middle parts, each provided with two joints at its opposite ends, and the joints at the opposite ends of the middle parts are included in two vertical planes, respectively. Thus, the handle 15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar 24 are foldable. When the side parts 15a, 15a of the handle 15 are moved forward after folding the front legs 12 and the rear legs 14 so as to extend substantially parallel, the respective end parts of the handle 15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar 24 are bent forward. Consequently, the stroller can be compactly folded in three as shown in Fig. 7.

Fig. 2 is a perspective view of the right side part 15a, namely, the side part on the left side as viewed in Fig. 1, of the handle 15, and the first side connecting bar 23a, namely, the side connecting bar on the left side as viewed in Fig. 1, and Fig. 3 is a side elevation of those components shown in Fig. 2. The rear end of the first side connecting bar 23a is pivotally joined, together with the L-shaped bracket 19, to the lower end part of the right side part 15a of the handle 15. A hook 26 is pivotally supported on a front end part of the first side connecting bar 23a.

Fig. 4 is a sectional view taken on line A-A in Fig. 3. Frame stoppers 30 are fitted in the lower ends of the side parts 15a, 15a of the handle 15. A slider 31 is supported on the frame stopper 30 for sliding along the axis of the side part of the handle 15. A pin 32 projects from the slider 31 in a direction perpendicular to the axis of the side part 15a of the handle 15 so as to engage in an axial slot 33 formed in the side part 15a of the handle 15. The pin 32 is connected to the locking member 20 mounted on the side part 15a of the handle 15. The slider 31 is connected to the operating mechanism by a first wire 34 extended through the side part 15a of the handle 15, and is pushed toward the lower end of the side part 15a of the handle 15 by a spring 31a.

When the operating mechanism 25 is operated to pull up the first wire 34, the slider 31 is raised against the resilience of the spring 31a, the pin 32 moves the locking member 20 upward. Consequently, the locking member 20 is disengaged from the bracket 19, so that the stroller can be folded.

One end of a second wire 35 is connected to the slider 31 placed in a lower end part of one of the side parts of the handle 15, the second wire 35 is extended along the first side connecting bar 23a, and the other end of the second wire 35 is connected to the hook 26. A frame cover 36 is put on the rear end of the first side connecting bar 23a and is pivotally joined to the side part 15a of the handle 15 together with the first side connecting bar 23a. The frame cover 36 guides the second wire 35 extending outside from the side part 15a of the handle 15 so as to extend along the first side connecting bar 23a.

As shown in Figs. 2 and 5, a rocker ring 37 is mounted on the upper connecting bar 24 contiguously with the first side connecting bar 23a. The rocker ring 37 guides the second wire 35. The free end of the second wire 35 is connected to a peripheral part of a base part of the hook 26. The base part of the hook 26 is pivotally joined to the inner side wall of the first side connecting bar 23a. The hook 26 has a nose 26a and is urged counterclockwise, as viewed in Fig. 5, by a spring 26b.

When the operating mechanism 25 is operated to pull up the first wire 34, the slider 31 is raised, the second wire 35 is pulled, and the hook 26 is turned in a disengaging direction, i.e., in a clockwise direction, as viewed in Fig. 5, against the resilience of the spring 26b.

A loop (engagement device) 27 having an eye 27a in which the nose 26a of the hook 26 is able to engage, is attached to a front end part of the second side connecting bar 23b.

When the stroller is folded in three, the hook 26 and the loop 27 are positioned to face each other, and the nose 26a of the hook 26 engages in the eye 27a of the loop 27 to retain the stroller in a folded state.

When it is desired to unfold the stroller, the operating mechanism 25 is operated to pull up the first wire 34. Then, the slider 31 is raised, the locking member 20 is raised accordingly, and the locking member 20 is disengaged from the bracket 19. Meanwhile, the second wire 35 is pulled by the slider 31, the hook 26 is turned in the disengaging direction against the resilience of the spring 26b, and the folded stroller is released from being folded. Consequently, the stroller can be unfolded for use by thus operating the operating mechanism disposed close at hand.

As apparent from the foregoing description, in the stroller according to the present invention, the operating mechanism combined with the handle, and the hook are connected by the first wire, and the hook is operated by operating the operating mechanism. Therefore, a retaining mechanism including the hook and the loop for retaining the stroller in the folded state is placed on parts excellent in strength and rigidity, and the retaining mechanism can be disengaged by operating the operating mechanism disposed close at hand to unfold the stroller.

A folding stroller in a comparative example will be described with reference to Figs. 6 to 8. Referring to Fig. 6 showing the folding stroller in a comparative example in a perspective view, the stroller has two front legs (right and left front legs) 12 provided with front wheels 11, two rear legs (right and left rear legs) 14 provided with rear wheels 13, a substantially U-shaped handle 15, two armrests (right and left armrests) 16, and a detachable guard arm 17 extended between the armrests 16. The handle 15 has right and left side parts 15a, 15a. Rear ends of the armrests 16 are pivotally joined to parts near the lower ends of the right and the left side part of the handle 15, respectively. The upper end parts of the front legs 12 are pivotally joined to front end parts of the armrests 16, respectively. Upper end parts of the rear legs 14 are pivotally joined to middle parts of the armrests 16, respectively. Lower ends of L-shaped brackets 19 are pivotally joined to middle parts of the rear

legs 14, respectively. Lower ends of the side parts 15a, 15a of the handle 15 are pivotally joined to middle parts of the brackets 19, respectively. When the stroller is unfolded, locking members 20 slidably mounted on lower end parts of the side parts of the handle 15 engage with locking parts formed in the upper ends of the brackets 19, respectively, to retain the stroller in an unfolded state.

The right and the left front legs 12 are connected by a front connecting bar 21, and the right and the left rear legs 14 are connected by a rear connecting bar 22. Front ends of side connecting bars 23 are pivotally joined to middle parts of the front legs 12, respectively, and the rear ends of the side connecting bars 23 are pivotally joined together with the brackets 19 to the lower end parts of the side parts of the handle 15, respectively. Middle parts of the side connecting bars 23 are connected by an upper connecting bar.

As shown in Fig. 6, the locking members 20 put on the lower end parts of the side parts of the handle 15 are engaged with the upper locking parts of the brackets 19 to retain the stroller in the unfolded state for use. An operating mechanism 25 combined with the handle 15 is operated to disengage the locking members 20 from the brackets 19. Then, the armrests 16 and the side connecting bars 23 are allowed to turn upward on the pivotal joints on the side parts of the handle 15, so that the front legs 12 and the rear legs 14 can be folded so as to extend substantially parallel to each other to facilitate carrying the stroller.

The handle 15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar, not shown, have middle parts each provided with two joints at its opposite ends, and the joints at the opposite ends of the middle parts are included in two vertical planes, respectively. Thus, the handle 15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar are foldable. When the side parts of the handle 15 are moved forward after folding the front legs 12 and the rear legs 14 so as to extend substantially parallel, the respective end parts of the handle

15, the front connecting bar 21, the rear connecting bar 22 and the upper connecting bar are bent forward. Consequently, the stroller can be compactly folded in three as shown in Fig. 7.

5 A hook is connected to a front end part of one of the side connecting bars 23, and a loop (engagement device) 26a provided with an eye 27a in which a nose 26a included in the hook 26 is able to engage is connected to a front end part of the other side connecting bar 23.

10 The hook 26 is engaged with the loop 27 as shown in Fig. 8 after folding the stroller in three to retain the stroller in the folded state.

 Whereas the user needs to take the hand off the handle 15 and needs to operate the hook by hand to engage or disengage the retaining mechanism of the stroller in the comparative example, the user is able to engage or disengage the retaining mechanism of the stroller of the present invention by operating the operating mechanism disposed close at hand.

What is claimed is:

1. A stroller foldable in three comprising:

a pair of front legs;

a pair of rear legs;

a handle having two side parts respectively connected to the pair of rear legs; and

first and second side connecting bars connecting the pair of front legs and lower end parts of the side parts of the handle;

wherein the first side connecting bar is provided with a hook, the second side connecting bar is provided with an engagement device with which the hook engages, an operating mechanism is combined with the handle, the operating mechanism is interlocked with the hook, and the hook is disengaged from the engagement device by operating the operating mechanism.

2. The stroller foldable in three according to claim 1, wherein

a slider is mounted for axial movement on a lower end part of the side part of the handle on the side of the first side connecting bar, the operating mechanism and the slider are connected by a first wire, and the slider and the hook are connected by a second wire.

3. The stroller foldable in three according to claim 2, wherein

a frame cover for guiding the second wire to the first side connecting bar is disposed between the first side connecting bar and the lower end part of the side part of the handle, and the second wire is extended along the first side connecting bar.

4. The stroller foldable in three according to claim 2, wherein

a rocker ring for guiding the second wire to the hook is disposed near the hook.

5. The stroller foldable in three according to claim 4, wherein

an upper connecting bar is extended between the first and the second side connecting bars, and the rocker ring is

mounted on the upper connecting bar.

6. The stroller foldable in three according to claim 1, wherein

the hook has a nose that engages with the engagement device, and the hook is supported pivotally on the first side connecting bar.

7. The stroller foldable in three according to claim 6, wherein

the hook is urged in an engaging direction to engage with the engagement device by a spring.

8. The stroller foldable in three according to claim 2, wherein

brackets and locking members are placed between the pair of rear legs and the handle, the slider is connected to the locking member on the side of one of the rear legs, and the locking member is disengaged from the corresponding bracket by moving the slider.

9. The stroller foldable in three according to claim 8, wherein

the slider and the locking member are interlocked by a pin attached to the slider so as to extend perpendicularly to the axis of the side part of the handle.

10. The stroller foldable in three according to claim 9, wherein

the side part of the handle is provided with an axial slot, and the pin moves along the slot.

STROLLER FOLDABLE IN THREE**ABSTRACT**

A stroller foldable in three includes a pair of front legs (12), a handle (15) having two side parts (15a, 15a), and first and second side connecting bars (23a, 23b) connecting
5 the pair of front legs (12) and lower end parts of the side parts (15a) of the handle (15). The first side connecting bar (23a) is provided with a hook (26), the second side connecting bar (23b) is provided with a loop (27) with which the hook (26) engages to retain the stroller in a folded state
10 in which the stroller is folded in three. An operating mechanism (25) combined with the handle (15) is interlocked with the hook (26) by wires (34, 35). The hook (26) is disengaged from the loop (27) by operating the operating mechanism (25).
15 (Fig.2)

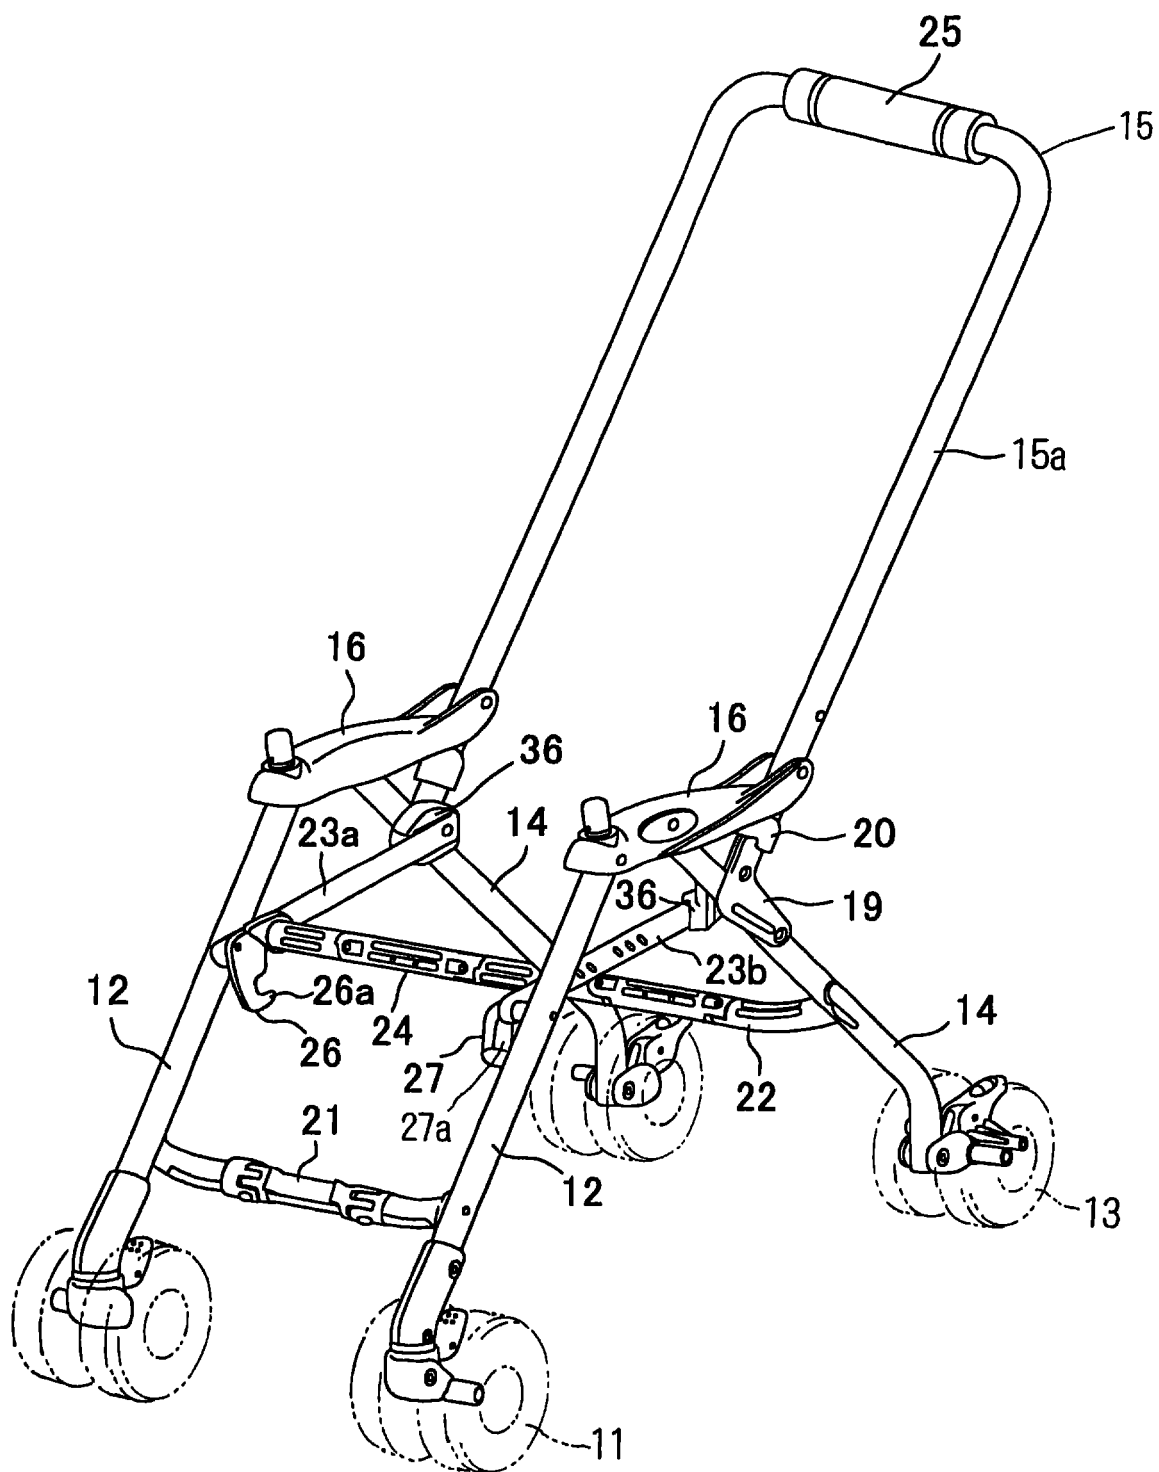


FIG. 1

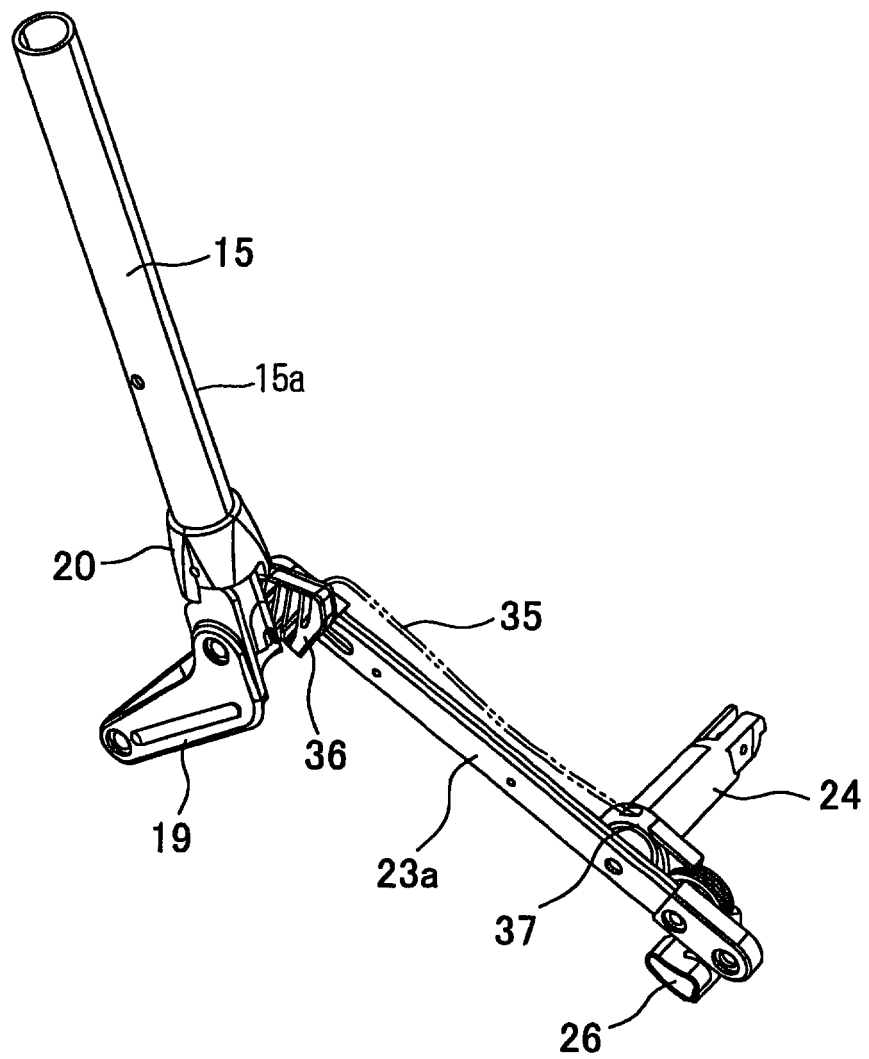


FIG. 2

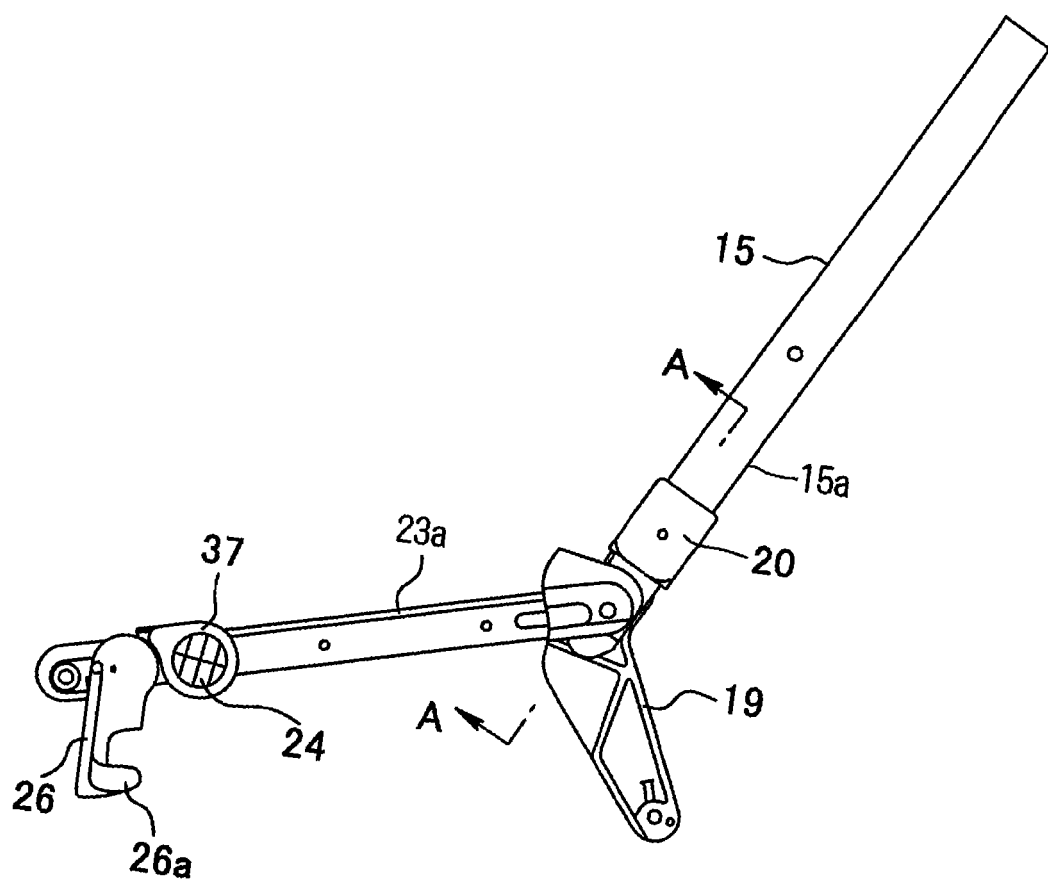


FIG. 3

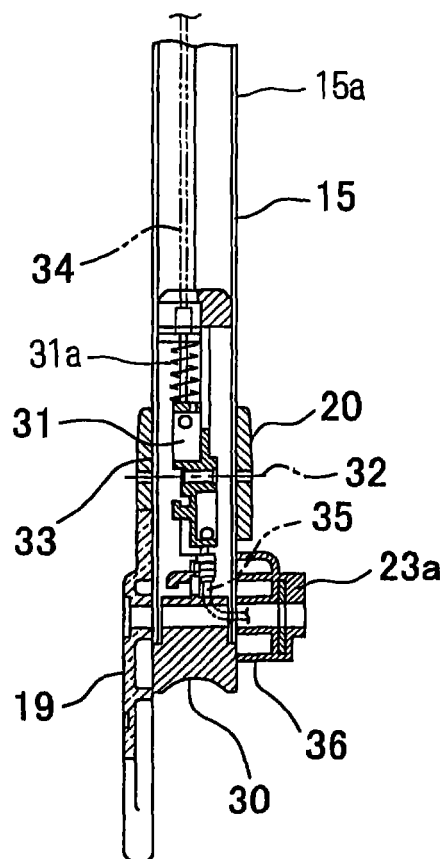


FIG. 4

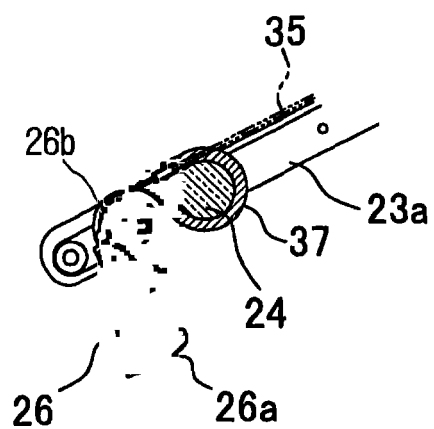


FIG. 5

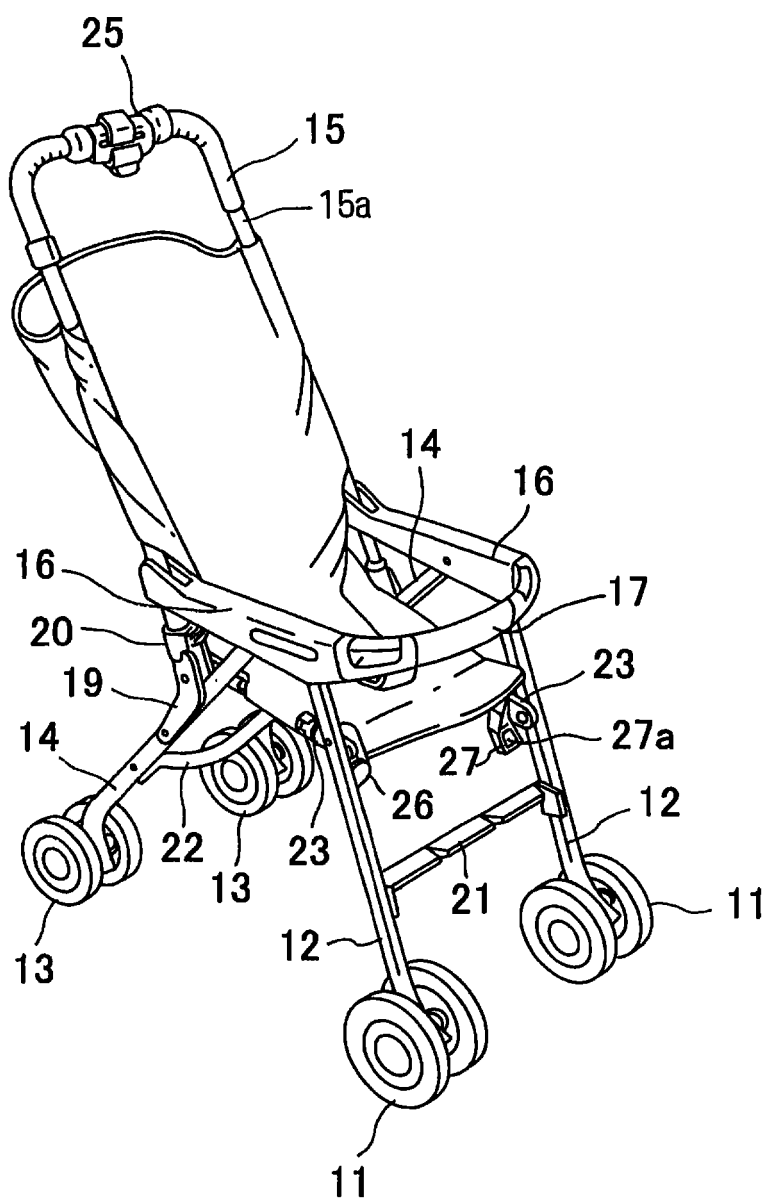


FIG. 6

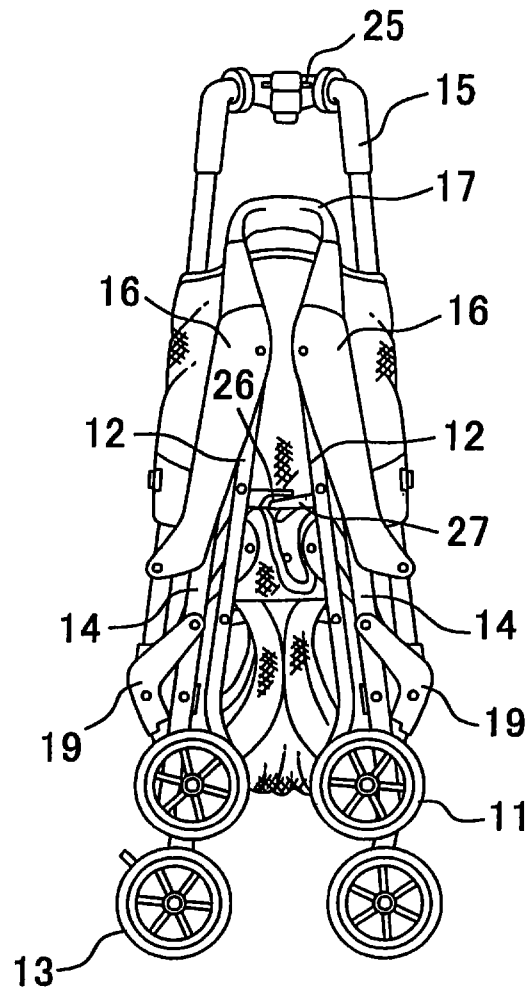


FIG. 7

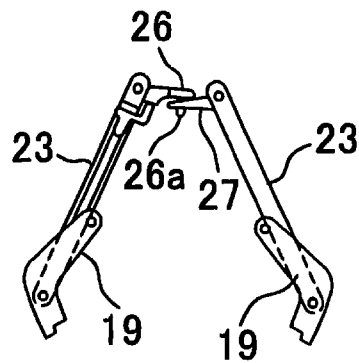


FIG. 8