




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G01S 5/14	A1	(11) International Publication Number: WO 00/14570 (43) International Publication Date: 16 March 2000 (16.03.00)
(21) International Application Number: PCT/US99/20343 (22) International Filing Date: 2 September 1999 (02.09.99) (30) Priority Data: 09/150,075 9 September 1998 (09.09.98) US (71) Applicant: QUALCOMM INCORPORATED [US/US]; 5775 Morehouse Drive, San Diego, CA 92121-1714 (US). (72) Inventors: ZOU, Qiuzhen; 11507 Westway Parkway, San Diego, CA 92126 (US). SIH, Gilbert, C.; 7804 Pipit Place, San Diego, CA 92129 (US). EDMONSTON, Brian, S.; 16350 Woodson View, Poway, CA 92064 (US). (74) Agents: GREENHAUS, Bruce, W. et al.; QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: CALL MAINTENANCE DURING POSITION LOCATION

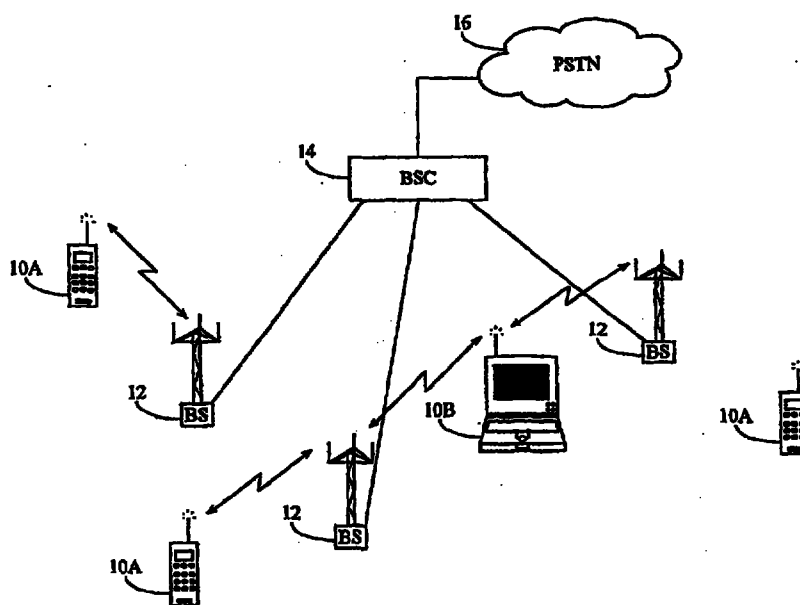

(57) Abstract

The present invention is a novel and improved method and apparatus for performing position location in wireless communications system. In one embodiment the invention comprises a method for performing position location in a subscriber unit in a CDMA wireless communications system having a base station, including the step of receiving a position location request during a communication, entering a position location mode, transmitting frames to the base station while performing a position location procedure, and returning to communications mode when said position location procedure has been completed.