


RTMP's copy



WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H02G 5/06	A1	(11) International Publication Number: WO 96/29769
		(43) International Publication Date: 26 September 1996 (26.09.96)

(21) International Application Number: PCT/GB96/00601

(22) International Filing Date: 15 March 1996 (15.03.96)

(30) Priority Data:
9505409.4 17 March 1995 (17.03.95) GB

(71) Applicant (for all designated States except US): KLOCKNER-MOELLER GMBH [DE/DE]; Hein-Moeller-Strasse 7-11, D-53115 Bonn (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BROOKS, Kevin [GB/GB]; 37 Kellynch Close, Alton, Hampshire GU34 2EG (GB). BUTCHER, Robert [GB/GB]; 35 Foxdown, Overton, Hampshire RG25 3JG (GB). REYNOLDS, Andrew [GB/GB]; 9 Stour Walk, Greenmeadow, Swindon, Wiltshire SN2 3LN (GB).

(74) Agent: H.N.& W.S.SKERRETT; Charles House, 148/9 Great Charles Street, Birmingham B3 3HT (GB).


(81) Designated States: AL, AM, AT, AU, AZ, BE, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: BUSBAR JOINT

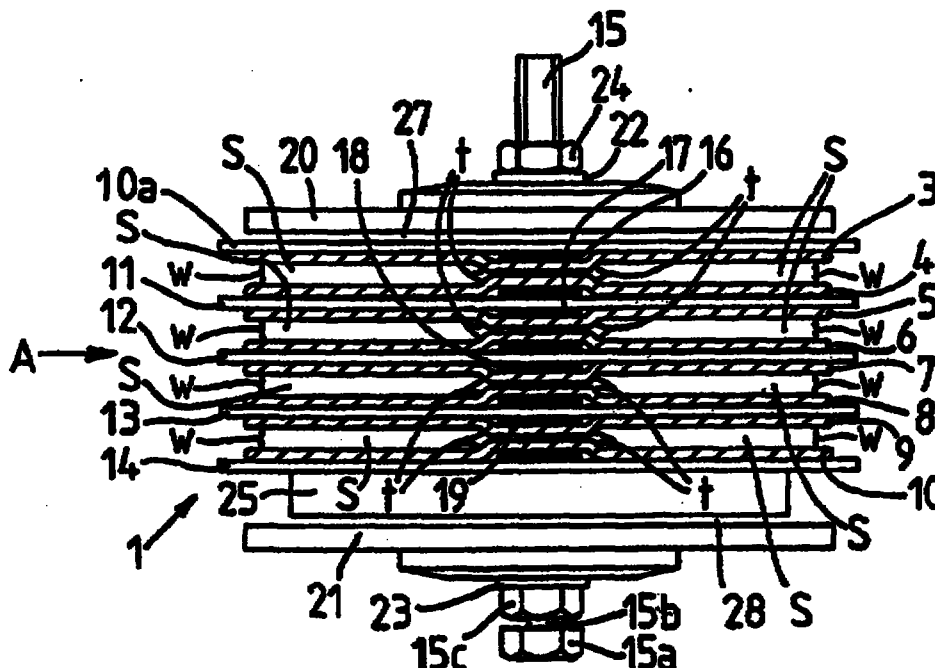

(57) Abstract

The figure shows a joint pack (1) for joining elongate conductor length of two busbar lengths in end to end relationship. Joint pack (1) has conductor plates (3 to 10) arranged in pairs spaced apart by insulator sheets (10a, 11 to 14), mounted on central bolt (15). Each pair of conductor plates (3, 4; 5, 6; 7, 8; 9, 10) has a spool bush (16, 17, 18, 19) mounted on bolt (15) and accommodated in channelled configuration of the plates (3 to 10). Each pair of plates (3, 4; 5, 6; 7, 8; 9, 10) has ends spring loaded apart from one another into contact, in use, with associated insulator plates (10a to 14), thereby maintaining correct slot widths w.