

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number
WO 01/42600 A1

(51) International Patent Classification⁷: E05B 63/24

(74) Agents: MOSEY, Stephen, George et al.; Marks & Clerk,
Alpha Tower, Suffolk Street Queensway, Birmingham B1
1TT (GB).

(21) International Application Number: PCT/GB00/04442

(22) International Filing Date:
23 November 2000 (23.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9929112.2 10 December 1999 (10.12.1999) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): BAN-
HAM PATENT LOCKS LIMITED [GB/GB]; 233/235
Kensington High Street, London W8 6SF (GB).

(72) Inventor; and



(75) Inventor/Applicant (*for US only*): COWPER, Brian, Ed-
ward [GB/GB]; 114 Elm Road, New Malden, Surrey KT3
3HP (GB).

Published:

- With international search report.
- Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.

[Continued on next page]

(54) Title: DOOR FASTENING DEVICE

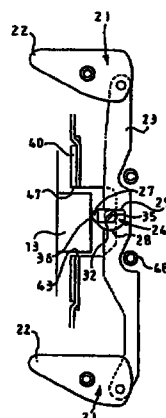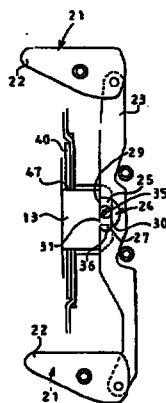

(57) Abstract: A door fastening device for securement at a jamb (10) of the frame of said door (11), the device having a casing with a slot (43) in a recessed central part of a front face (38) thereof at which is disposed a faceplate (40) adjustably secured to the casing and having a slot (47) aligned with slot (43) to allow passage of a bolt (13) of a lock (12) or latch of the door. The bolt is arranged, when extended, to engage and move rearwardly in the casing a cam (24) secured to one side of a link (23) which is pivotally mounted at its respective ends to swivel bolts (21). The rearwards movement of the link (23) causes the bolts to extend through respective openings in the front of the casing to prevent opening of the door. The cam has a flat surface (29; 31) and at 90° thereto an arcuate nose surface (36), the cam being adjustably rotatable to position the flat surface or the nose surface in line with the bolt. Since the nose surface is radially further from the cam rotation axis than the flat surface, the adjustment compensates for differing gaps between the door and frame by ensuring the bolt always moves the link fully to its position where it causes both swivel bolts fully to extend.

WO 01/42600 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.