

FIG.1


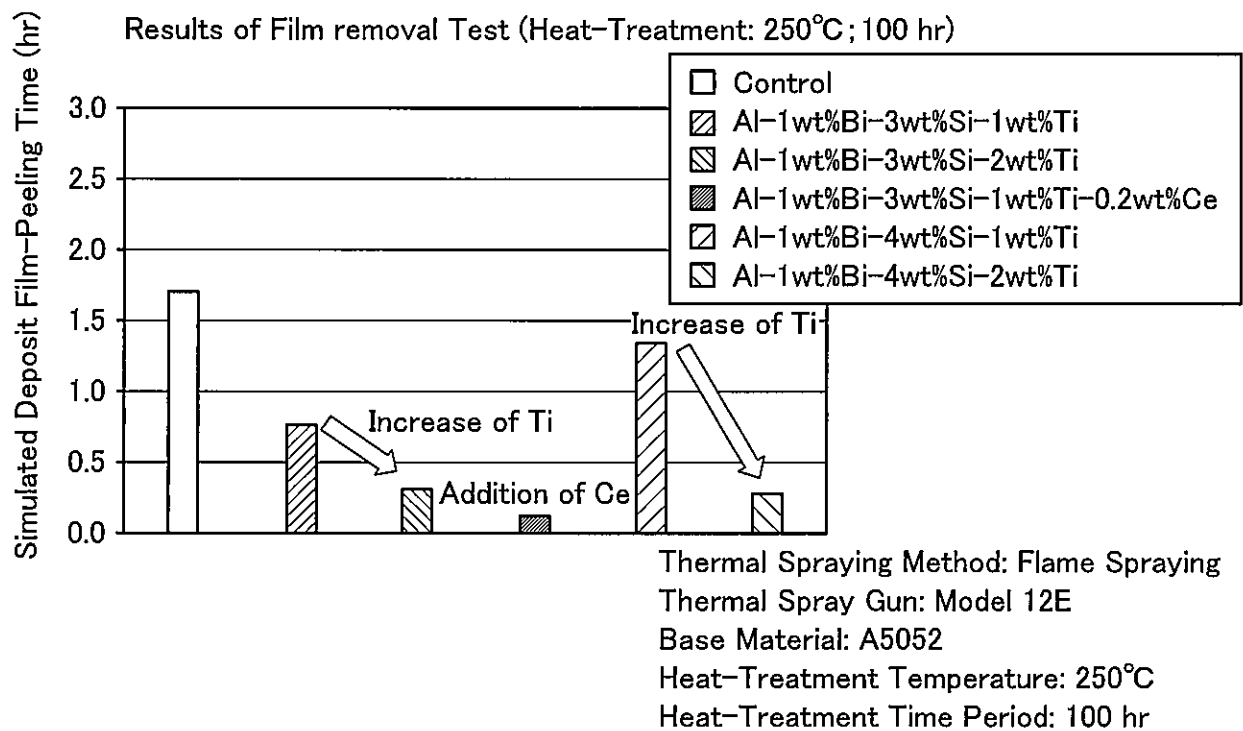


FIG.2

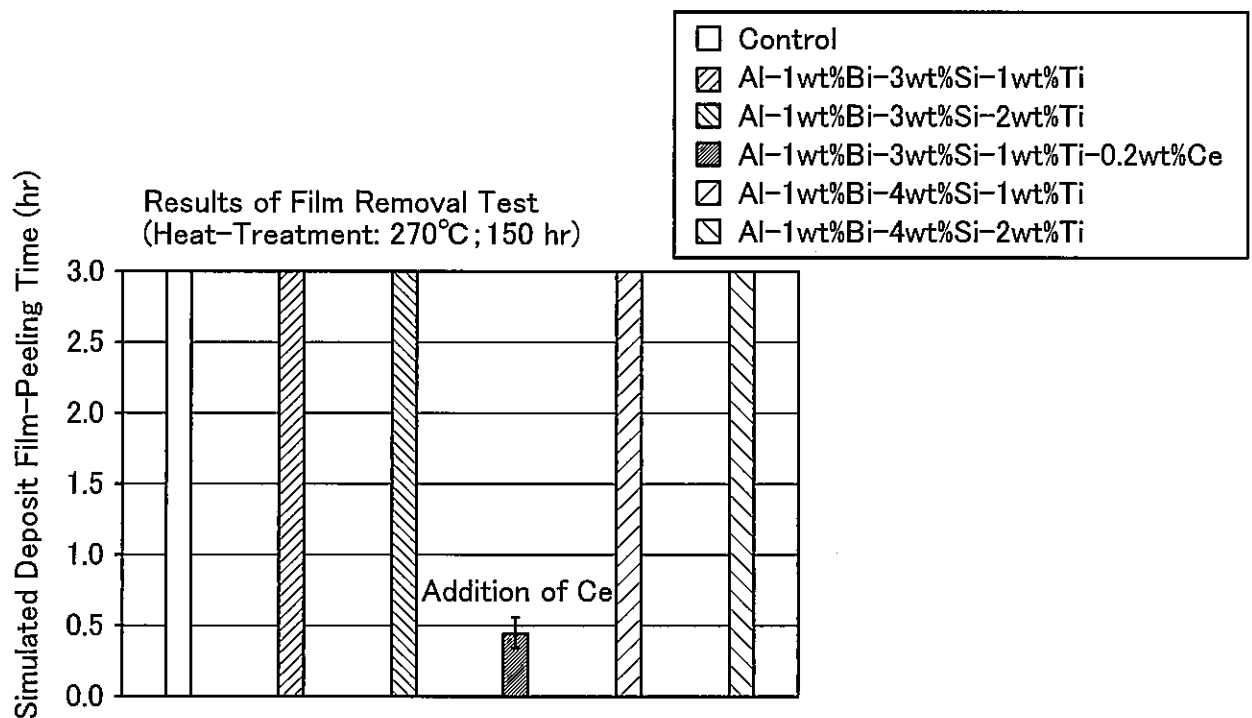

Thermal Spraying Method: Flame Spraying
 Thermal Spray Gun: Model 12E
 Base Material: A5052
 Number of N: 3

Heat-Treatment Temperature: 270°C
 Heat-Treatment Time Period: 150 hr.

FIG.3

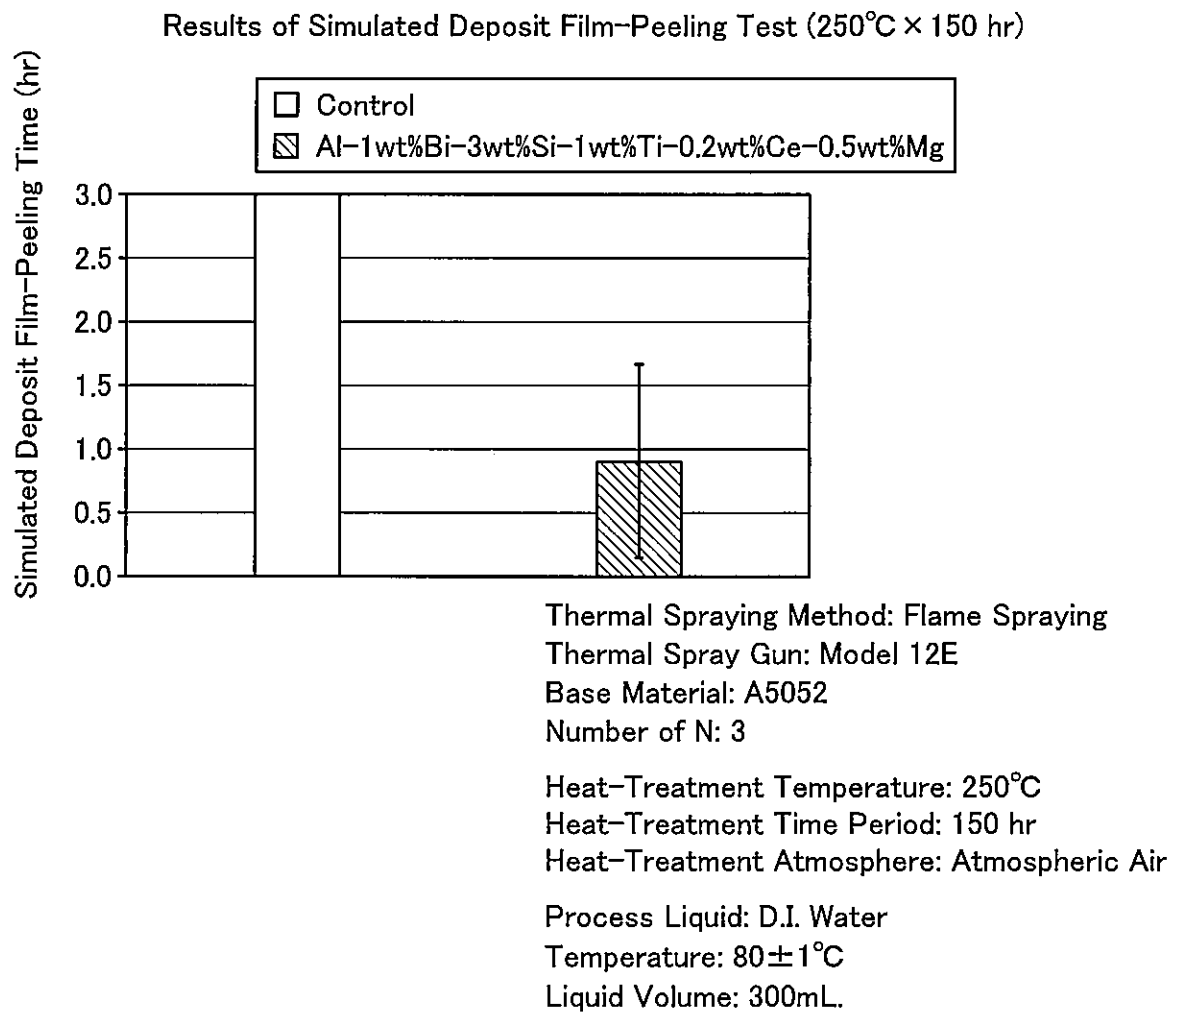


FIG.4


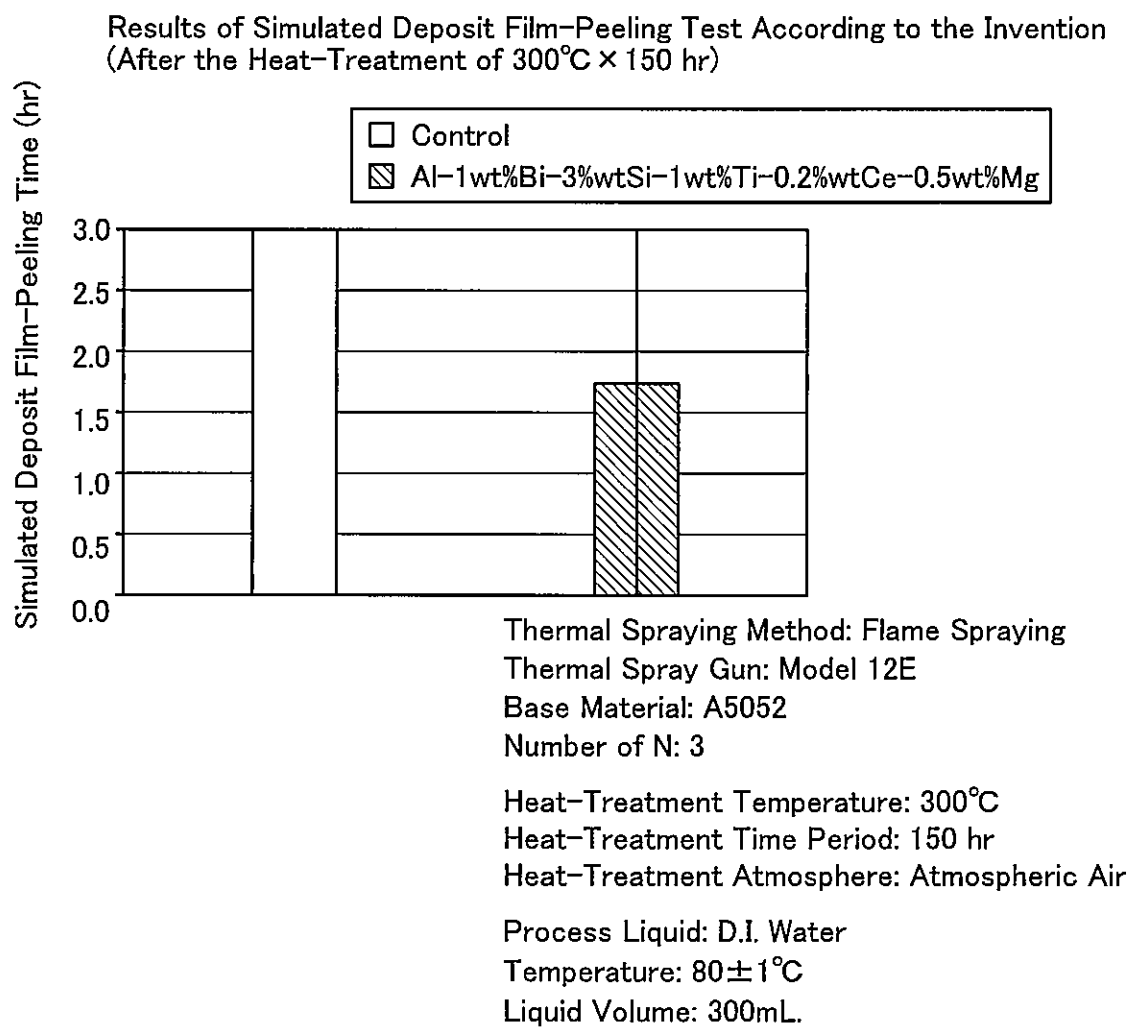


FIG.5



(b)

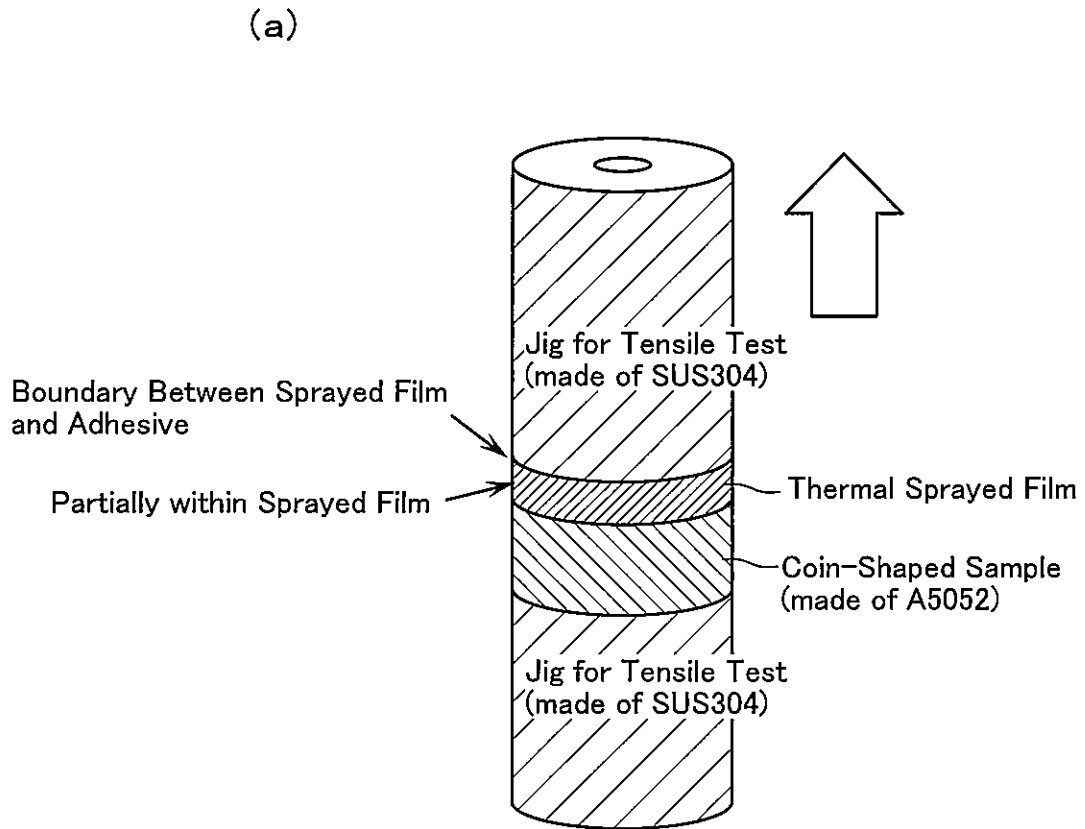