



(43) International Publication Date
7 October 2004 (07.10.2004)


PCT

(10) International Publication Number
WO 2004/085960 A3

- | | |
|---|---|
| <p>(51) International Patent Classification⁷: E21B 29/12,
B66D 01/48</p> <p>(21) International Application Number:
PCT/US2004/008465</p> <p>(22) International Filing Date: 19 March 2004 (19.03.2004)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
10/395,611 24 March 2003 (24.03.2003) US</p> <p>(71) Applicant (for all designated States except US): OCEA-
NEERING INTERNATIONAL, INC. [US/US]; 11911
F.M. 529, Houston, TX 77041 (US).</p> <p>(72) Inventors: PIECYK, Michael; 10 Hedgebell Court, The
Woodlands, TX 77380 (US). O'SULLIVAN-BASKET,</p> | <p>Jenelle; 16203 Green Smoke Drive, Houston, TX 77095
(US). BENSON, Dan, T.; 15418 Winterhaven, Tomball,
TX 77375 (US).</p> <p>(74) Agents: MAZE, Gary, R. et al.; Duane Morris LLP, 3200
Southwest Freeway, Suite 3150, Houston, TX 77027 (US).</p> <p>(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.</p> <p>(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,</p> |
|---|---|

[Continued on next page]

- (54) Title:** WIRELINE SUBSEA METERING HEAD AND METHOD OF USE

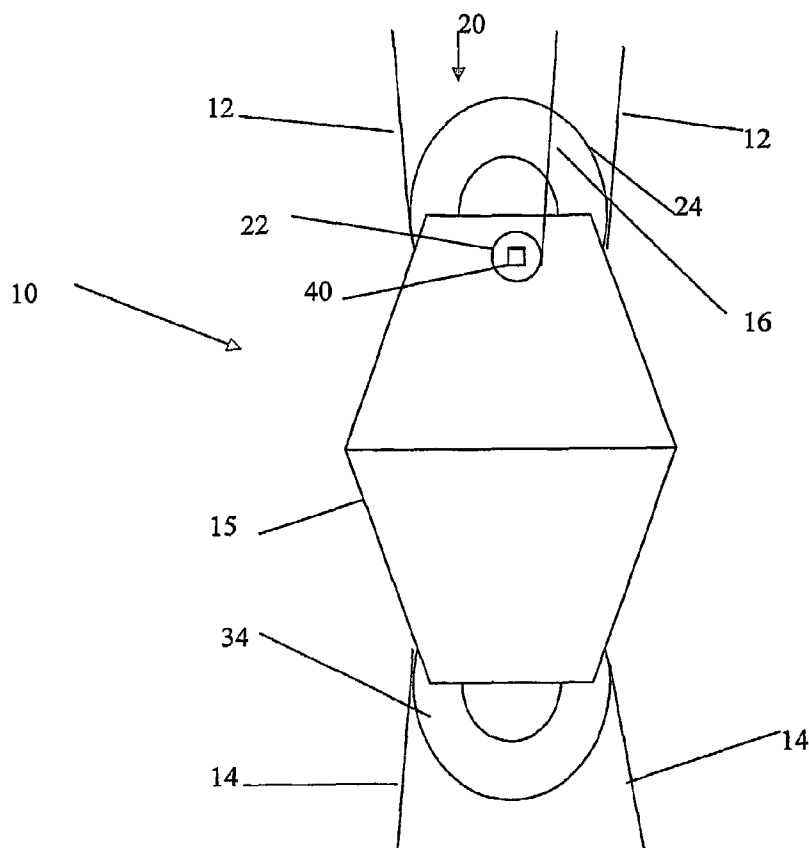

(57) Abstract: The present invention comprises a system and method to measure positioning with respect to deploying a subsea load, the system comprising a subsea metering head having a position sensor; a controllable winch operatively connected to the winch flexible cable; and a controller operatively in communication with the controllable winch and the position sensor. The controller is capable of controlling the controllable winch in response to a received position feedback sensor signal. It is emphasized that this abstract is provided to comply with the rules requiring an abstract which will allow a searcher or other reader to quickly ascertain the subject matter of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope of meaning of the claims.



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

16 June 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.