(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
11 June 2020 (11.06.2020)

WIPO | PCT

(10) International Publication Number
WO 2020/117579 A1

(51) International Patent Classification:
G05D 23/19 (2006.01) *F24F 11/00* (2018.01)
G01R 31/28 (2006.01)

(21) International Application Number:
PCT/US2019/063500

(22) International Filing Date:
27 November 2019 (27.11.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/775,169 04 December 2018 (04.12.2018) US
16/692,334 22 November 2019 (22.11.2019) US

(71) Applicant: **TEMPTRONIC CORPORATION** [US/US]; 41 Hampden Road, Mansfield, Massachusetts 02048 (US).

(72) Inventors: **ELSDOERFER, Norbert**; c/o Temptronic Corporation, 41 Hampden Road, Mansfield, Massachusetts 02048 (US). **WENG, Chuan**; c/o Temptronic Corporatoin, 41 Hampden Road, Mansfield, Massachusetts 02048 (US).

(74) Agent: **MILLS, Steven M.** et al.; BURNS & LEVINSON, LLP, 125 Summer Street, Boston, Massachusetts 02110 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: SYSTEM AND METHOD FOR CONTROLLING TEMPERATURE AT TEST SITES

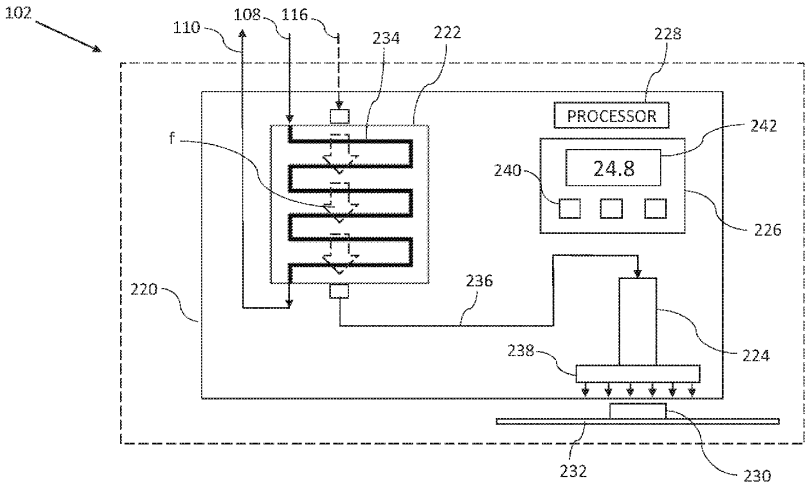

FIG. 2

(57) Abstract: A temperature control system includes a fluid chiller, an air dryer, and a plurality of test stations positioned at remote locations from the fluid chiller and the air dryer. The fluid chiller is configured to generate a chilled fluid stream. The air dryer is configured to generate a dry air stream. Each local test station includes a heat exchanger and thermal control unit. The heat exchanger is configured to selectively cool the dry air stream with the chilled fluid stream to generate an output stream. The thermal control unit is configured to control distribution of the output stream to a local test site.

WO 2020/117579 A1

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*