

(19) World Intellectual Property Organization
International Bureau



162162


(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72312 A2

- (51) International Patent Classification⁷: **G11B**
- (21) International Application Number: PCT/US00/13736
- (22) International Filing Date: 18 May 2000 (18.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/315,398 20 May 1999 (20.05.1999) US
- (71) Applicant: DATAPLAY.COM [US/US]; 6200 Lookout Road, Boulder, CO 80301 (US).
- (72) Inventors: BRAITBERG, Michael, F.; 440 Broken Fence Road, Boulder, CO 80302 (US). VOLK, Steven, B.; 3805 Norwood Court, Boulder, CO 80304 (US). VOLAN, Gregory, D.; 7245 Cardinal Lane, Longmont, CO 80503 (US). REDMOND, Ian, R.; 5072 Province Lane Road, Princeton, NJ 08540 (US).
- (74) Agents: HUGHES, Richard, L. et al.; Sheridan Ross P.C., Suite 1200, 1560 Broadway, Denver, CO 80202-5141 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— Without international search report and to be republished upon receipt of that report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOVABLE OPTICAL STORAGE DEVICE AND SYSTEM

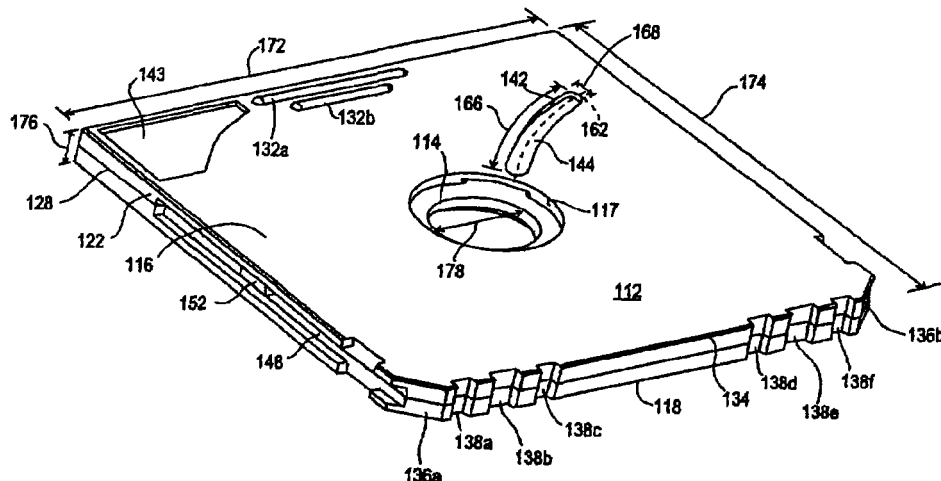

(57) Abstract: A user-removable optical data storage system is provided. A rotatable first-surface medium is enveloped in a cartridge. The cartridge provides relatively large data capacity such as about 0.25 Gbytes or more despite a relatively small size such as about 35 mm X 35 mm X 3 mm. Preferably the cartridge substantially seals the data surfaces of the medium when the cartridge is withdrawn from a drive and at least a portion of one surface is automatically exposed to the objective of an optics arm when said cartridge is inserted in the drive. Tracking involves rotating an optic arm about an axis parallel to the disk rotation axis. Focus can involve pivoting the arm about an axis parallel to the disk surface.

WO 00/72312 A2



G00001