

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 March 2006 (23.03.2006)

PCT

(10) International Publication Number
WO 2006/031421 A1

(51) International Patent Classification:
F16B 39/02 (2006.01) *F16B 45/00* (2006.01)

PANASIK, Cheryl, L. [US/US]; 4N610 Deerslayer Drive,
Elburn, IL 60119 (US).

(21) International Application Number:
PCT/US2005/030652

(74) Agents: SOLTIS, Lisa, M. et al.; Illinois Tool Works Inc.,
3600 West Lake Avenue, Glenview, IL 60026 (US).

(22) International Filing Date: 29 August 2005 (29.08.2005)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/939,795 13 September 2004 (13.09.2004) US

(71) Applicant (for all designated States except US): ILLI-
NOIS TOOL WORKS INC. [US/US]; 3600 West Lake
Avenue, Glenview, IL 60026 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): ERNST, Richard,
J. [US/US]; 5593 Havenridge Way, San Diego, CA 92130
(US). DOWSE, George, B. [US/US]; 9753 Compton
Drive, Huntley, IL 60142 (US). DUNK, Joseph, J.
[US/US]; 1304 Hunter Circle, Naperville, IL 60540 (US).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: GARAGE HOOK

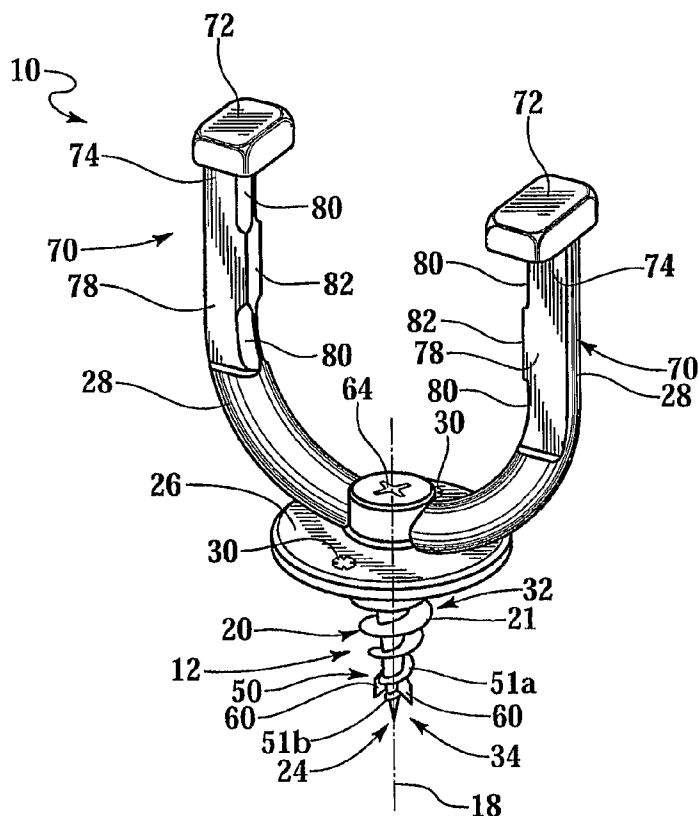

(57) Abstract: In one aspect, a holder
(10) mountable to a friable substrate may
include a self-drilling anchor (12), a wall
engaging flange (26) having an opening
(30) for receiving a fastener (6), and at
least one leg (28) extending from the
flange for holding an object. In another
aspect, a holder may include a selfdrilling
anchor having a drilling portion longer
than a drywall (1) thickness followed
by a high-threaded portion (32), a wall
engaging flange, and at least one leg for
holding an object. In still another aspect,
a holder may include a selfdrilling
anchor having a screw-like drilling
portion (12) longer than a drywall
thickness followed by a high-threaded
portion, a drywall engaging flange having
a recess (64) for receiving a rotary driver
and a pair of openings each capable
of receiving a threaded fastener and
engaging threads (8) thereof.



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*