

FIG. 1

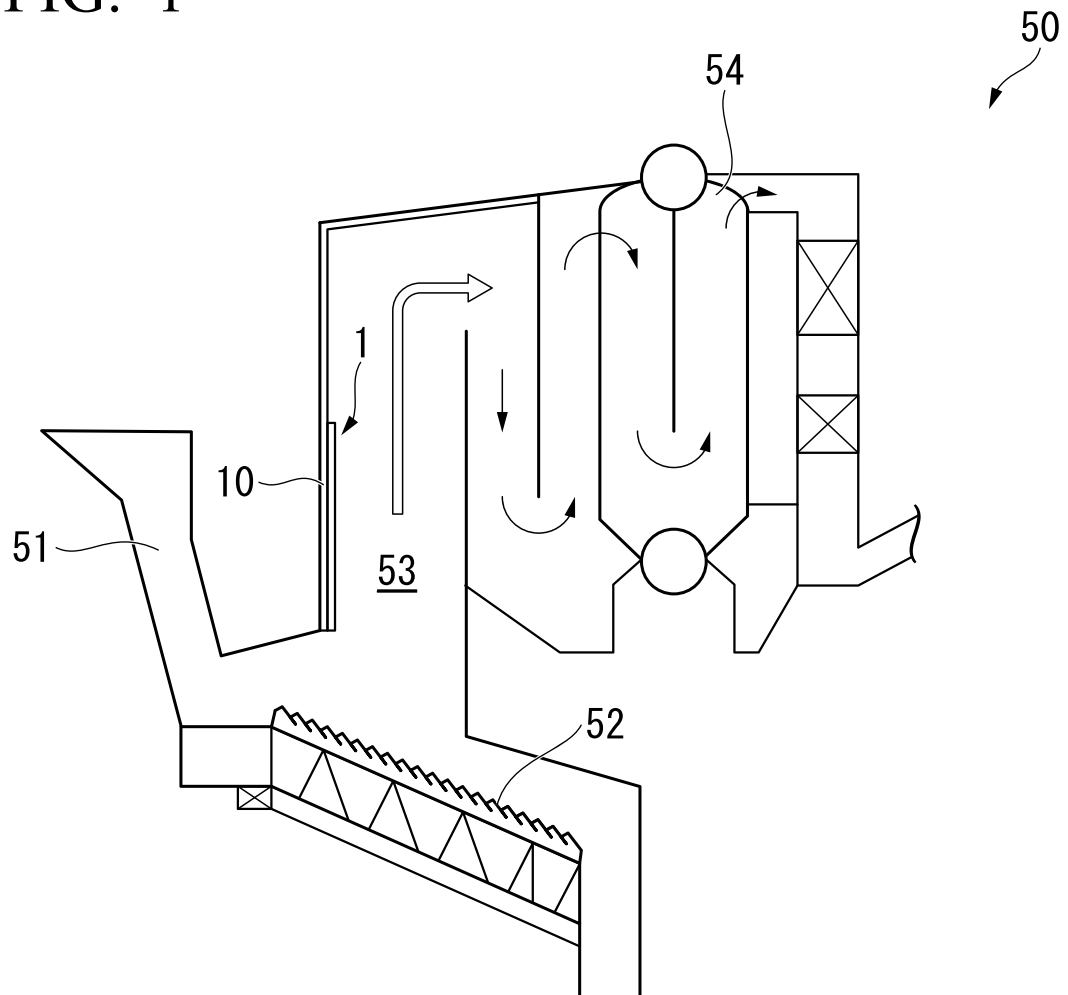


FIG. 2

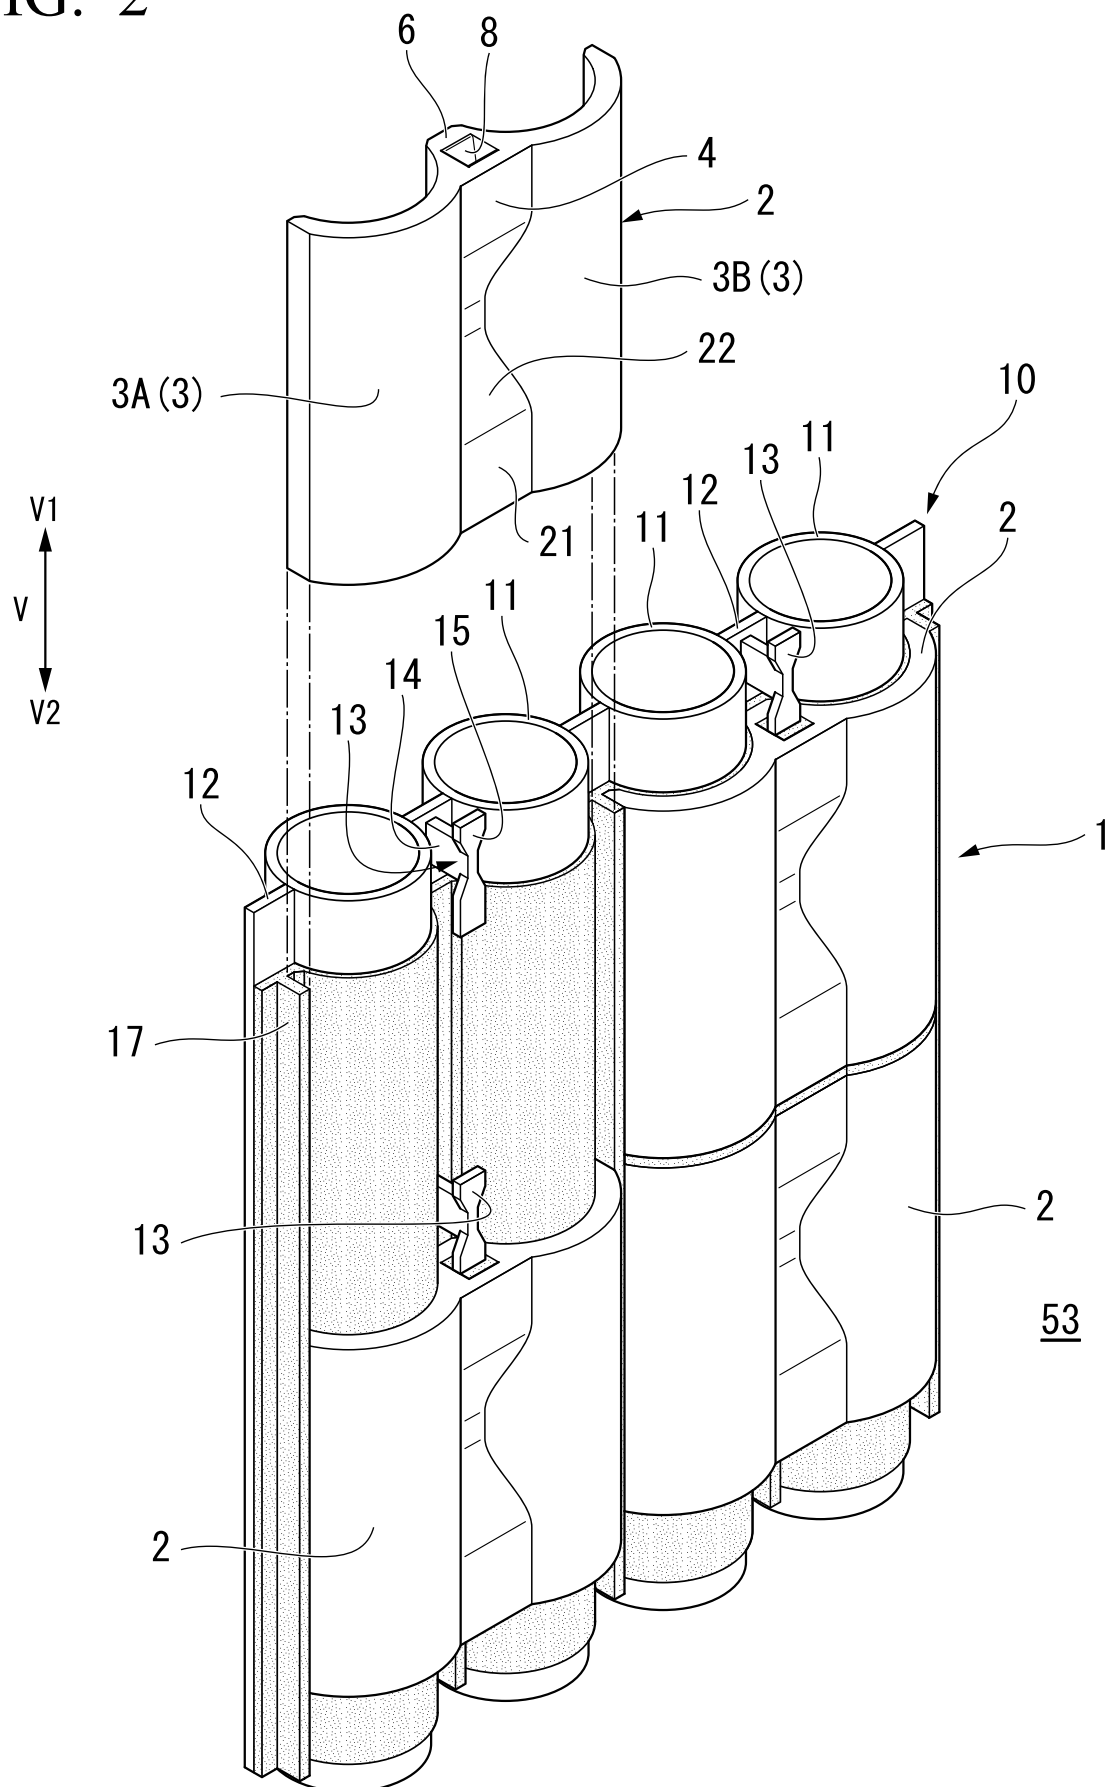


FIG. 3

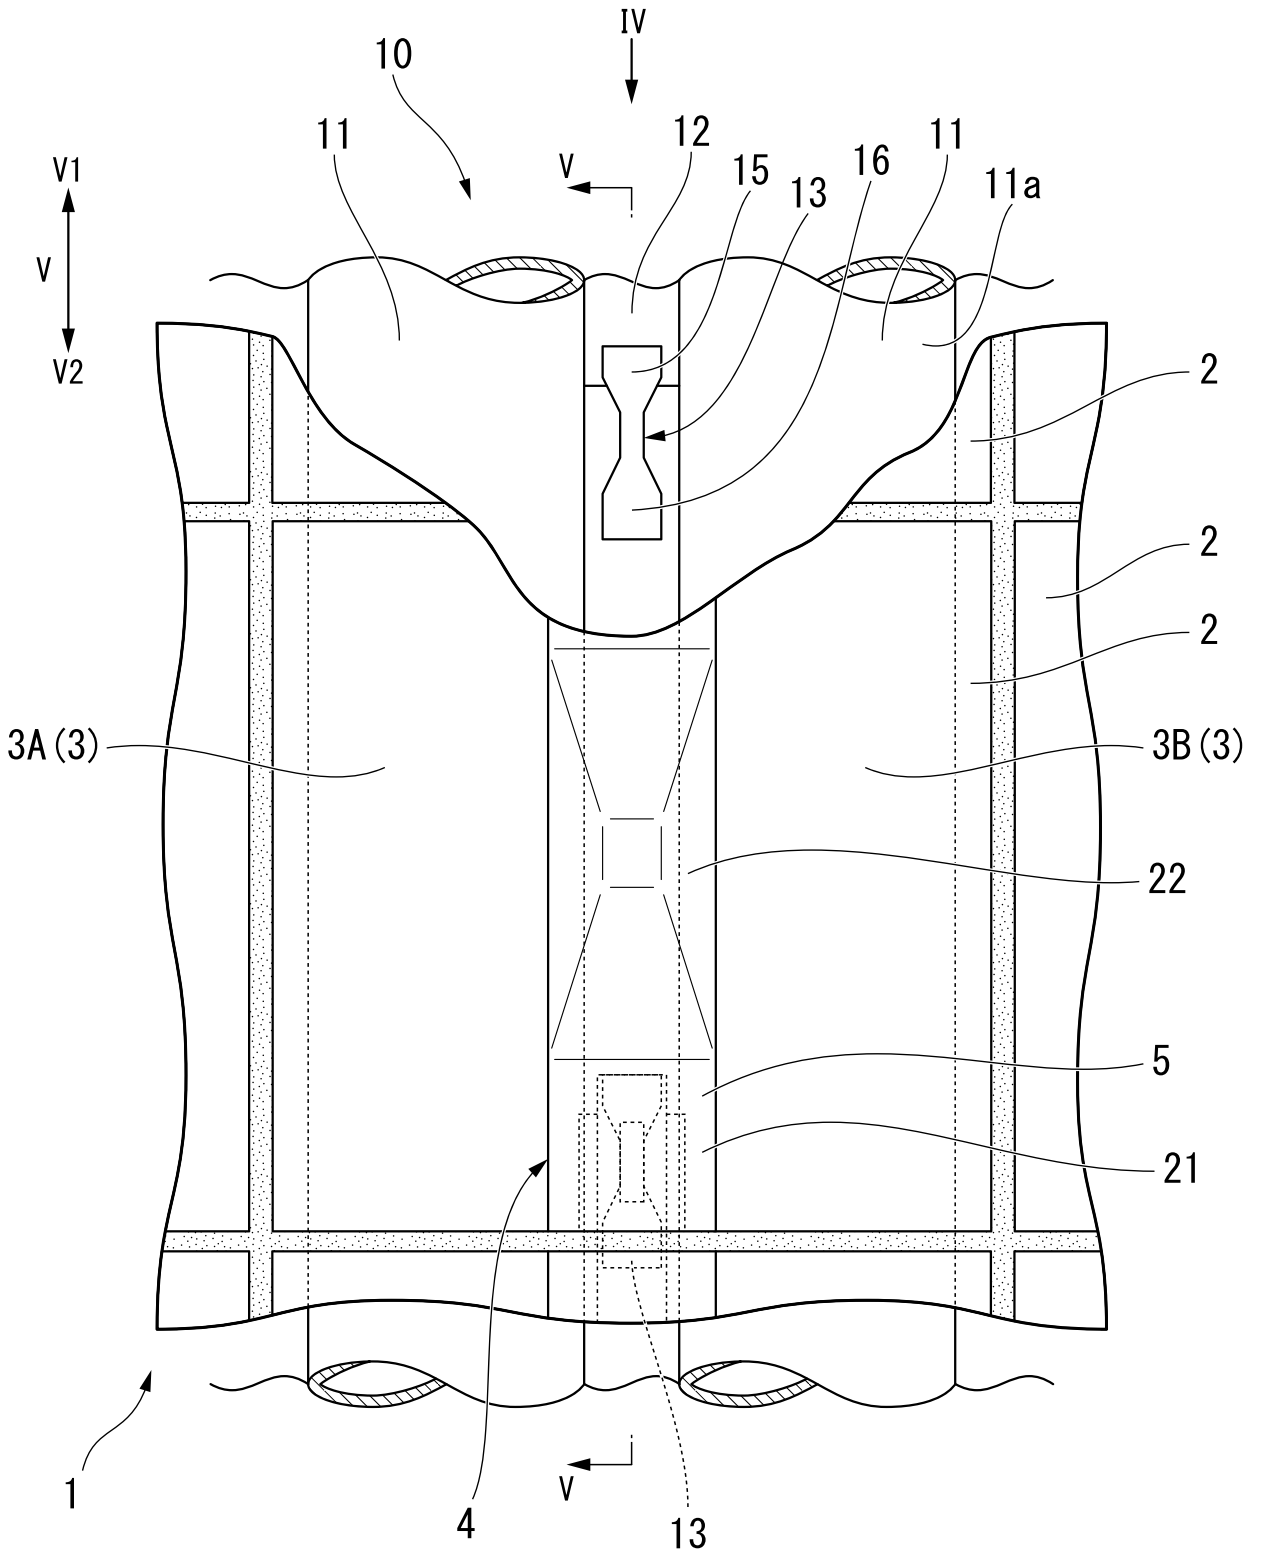


FIG. 4


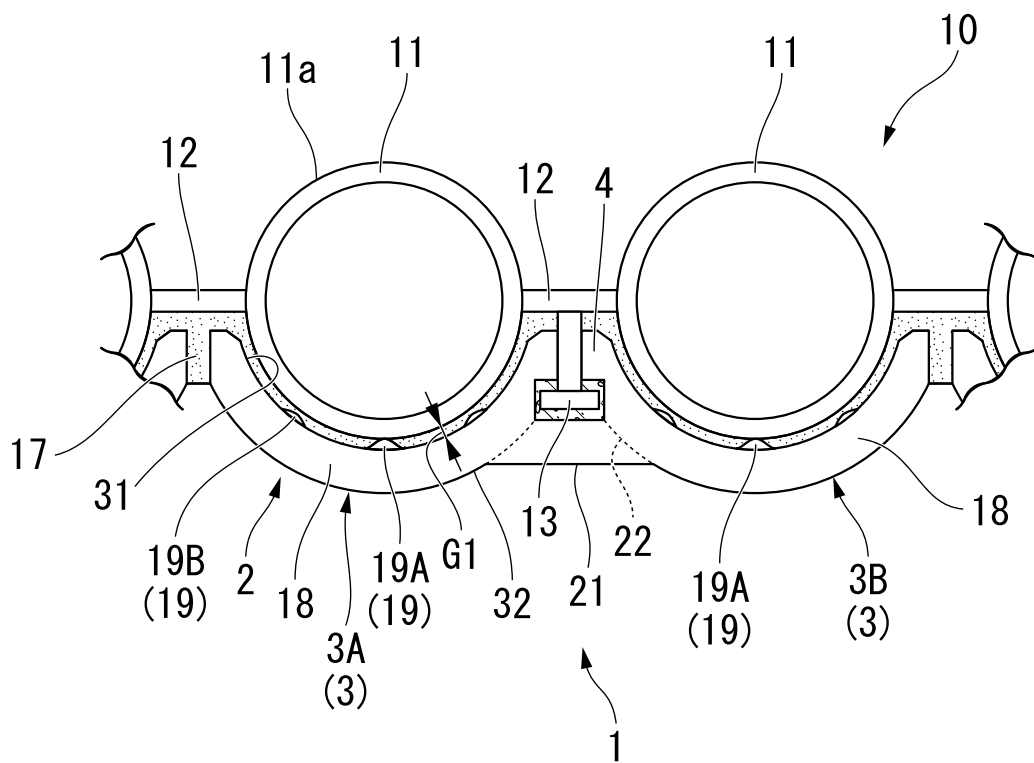


FIG. 5

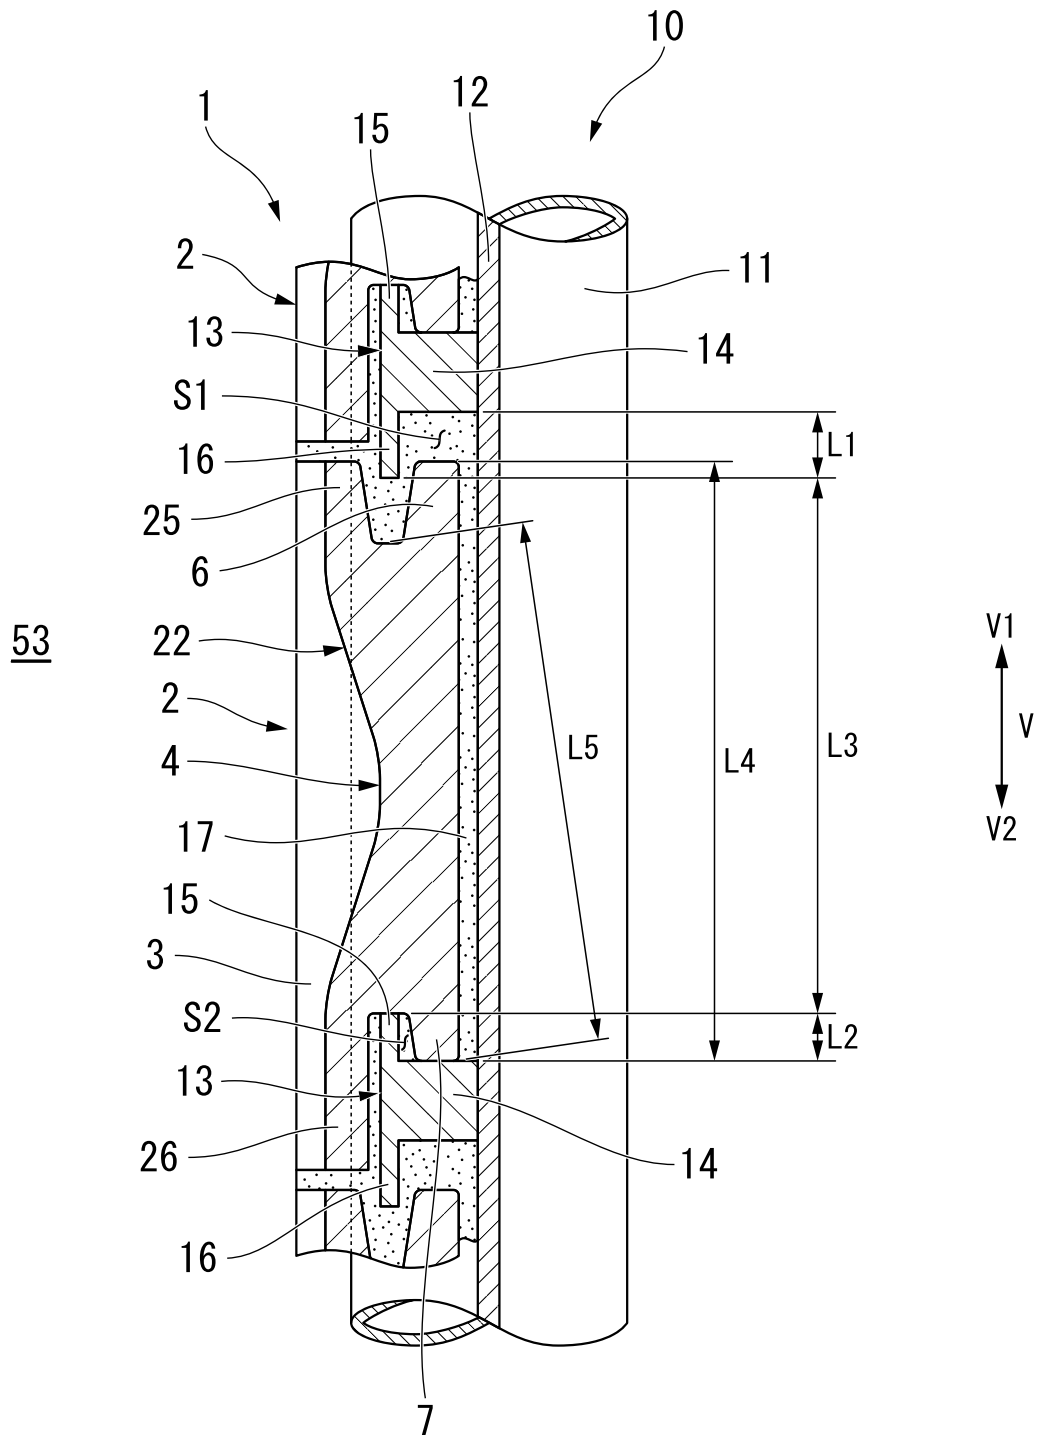

Top view of a semiconductor device 100. The device features a central region 5 containing a grid of openings 19A and 19B. This central region is flanked by a frame 2, which is divided into four quadrants by a central vertical strip 6 and a central horizontal strip 7. The top and bottom quadrants are labeled 3A(3) and 3B(3) respectively, while the left and right quadrants are labeled 31. The central region 5 is also labeled 18. The openings 19A and 19B are arranged in a grid pattern. The device is shown with coordinate axes V1, V2, VII, and VIII.

FIG. 7

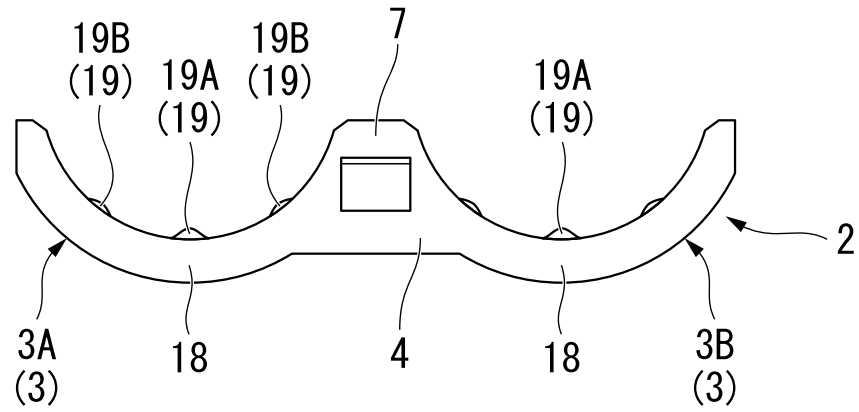


FIG. 8

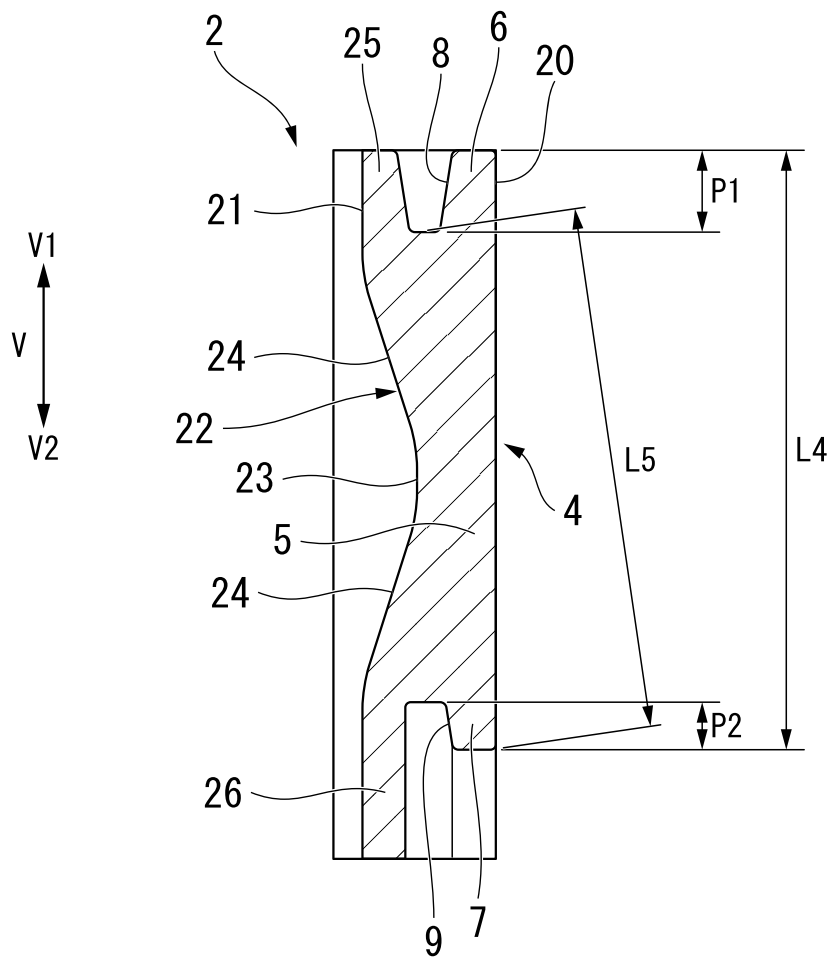


FIG. 9

