



- (51) International Patent Classification:
A62C 2/06 (2006.01)
- (21) International Application Number:
PCT/US2013/020233
- (22) International Filing Date:
4 January 2013 (04.01.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/584,641 9 January 2012 (09.01.2012) US
- (71) Applicant: TYCO FIRE PRODUCTS LP [US/US]; 1400
Pennbrook Parkway, Landsdale, PA 19446 (US).
- (72) Inventors: ALMEIDA, Jose, L.; 5 Rainbow Ct., War-
wick, RI 02889 (US). CHAVEZ, Marcelo, J.; 22 Vermont
Avenue, Providence, RI 02905 (US).
- (74) Agent: LAUB, David, W.; Perkins Coie LLP, 700 Thir-
teenth Street, N.W., Suite 600, Washington, DC 20005
(US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: FIRE PROTECTION DEVICE

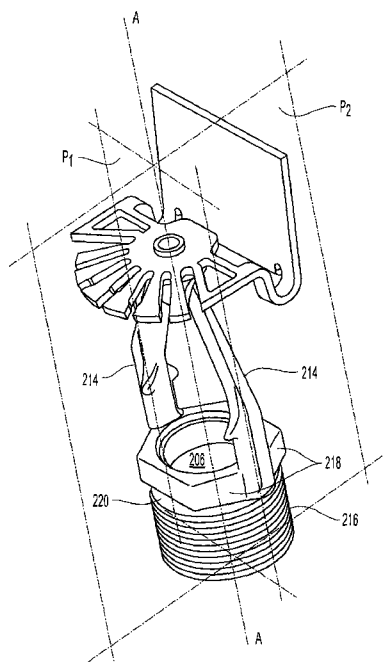


Fig. 1A

(57) Abstract: A fire protection device including a frame having a body with an inlet and an outlet disposed spaced along a longitudinal axis of a passageway. A pair of arms is disposed in a first plane parallel to the longitudinal axis and coupled to the body. A deflector assembly having a generally planar face portion is distally spaced from the outlet of the body and orthogonal to the longitudinal axis. The face portion includes two openings on opposite sides of a second plane perpendicular to the first plane. A canopy portion is supported on a first side of the first plane from the face portion. The deflector assembly includes a plurality of tines extending along the face portion on a second side of the first plane. Each of the tines have an outer edge disposed on a common circle centered along the longitudinal axis.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*