



(51) International Patent Classification:

F16M 11/12 (2006.01) *F16M 13/02* (2006.01)
F16M 11/24 (2006.01)

(21) International Application Number:

PCT/US2011/039587

(22) International Filing Date:

8 June 2011 (08.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/353,714	11 June 2010 (11.06.2010)	US
13/153,316	3 June 2011 (03.06.2011)	US

(71) Applicant (for all designated States except US):
KNOLL, INC. [US/US]; 1235 Water Street, East
Greenville, Pennsylvania 18041 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SAPPER, Richard**
[DE/IT]; Via Beretta 3, I-20121 Milan (IT). **SNYDER,**
Ronald [US/US]; 2296 Burgundy Drive, Macungie,
Pennsylvania 18062 (US).

(74) Agent: **FISCHER, Ralph G.**; Buchanan Ingersoll &
Rooney PC, 301 Grant Street, 20th Floor, Pittsburgh,
Pennsylvania US (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: SUPPORT APPARATUS

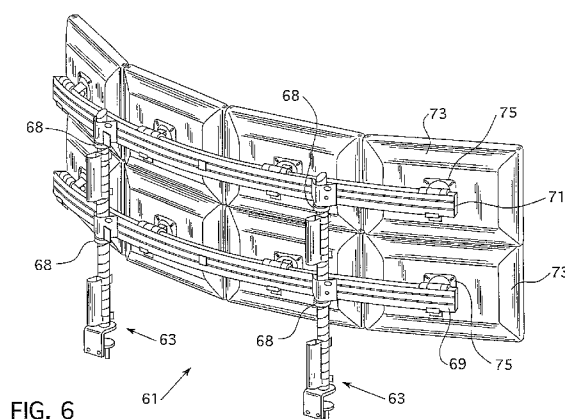

(57) Abstract: A support apparatus includes a first substantially horizontal member positioned adjacent to first and second elongated substantially vertical member members. The first substantially horizontal member has a channel formed in its rear side. The channel is sized and configured to receive wiring for display devices. The first substantially horizontal member is supported or attached to first and second collars positioned on the first and second elongated substantially vertical members such that movement of the first and second collars adjusts a vertical position of the first substantially horizontal member. One or more display devices, such as LCD screens or computer monitors, may be positioned on the first substantially horizontal member. Preferably, each display device positioned on the first substantially horizontal member is connected to the first substantially horizontal member via a connector that utilizes a releasable attachment mechanism that permits an easy removal or connection to the first substantially horizontal member.