

(43) International Publication Date
5 February 2015 (05.02.2015)

(51) International Patent Classification:

F42B 10/32 (2006.01) *F42B 14/02* (2006.01)
F42B 3/24 (2006.01) *F42B 5/18* (2006.01)

(21) International Application Number:

PCT/AU2014/000756

(22) International Filing Date:

25 July 2014 (25.07.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013902843 31 July 2013 (31.07.2013) AU
 2013101363 15 October 2013 (15.10.2013) AU

(71) Applicant: **TECHVENTURE INVESTMENTS PTY LTD** [AU/AU]; 35 Vintage Lane, The Vines, Western Australia 6039 (AU).

(72) Inventor: **HARRISON, Dale**; 18 Marlborough Way, Quinns Rocks, Western Australia 6030 (AU).

(74) Agent: **GRIFFITH HACK**; Level 19, 109 St Georges Terrace, Perth, Western Australia 6000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A PROJECTILE BODY AND CORRESPONDING AMMUNITION ROUND FOR SMALL ARMS OR A LIGHT FIREARM

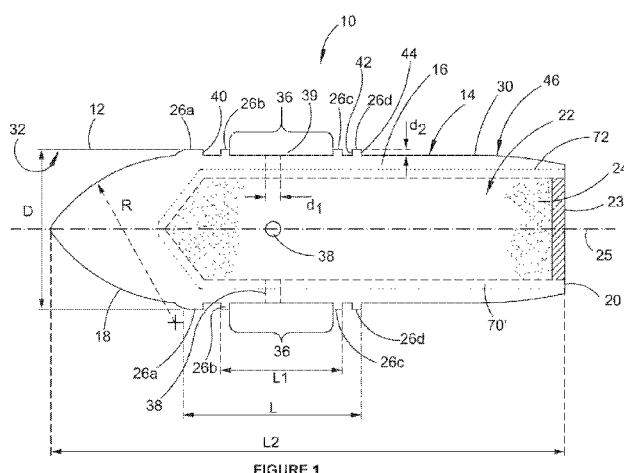


FIGURE 1

(57) Abstract: A projectile (14) for an ammunition round (10) for use with a small arms or light firearm comprises an elongated projectile body (16). The projectile body (16) has first and second axially opposed ends (18, 20) respectively and a cavity (20) extending there between. The cavity is able to hold a quantity of propellant (24). A plurality of seals (26) extend about an outer surface of the body (16). The seals (26) protrude radially from the body (16) and operate to form a substantial seal against an inner circumferential surface of a barrel (12) of the firearm. Two of the seals (26b and 26c) are mutually adjacent and spaced apart in a direction of a longitudinal axis of the body to form a seal bound outer surface portion (36) of the body (16). One or more holes (38) are formed in the body (16) enabling fluid communication between the cavity (22) and the seal bound outer surface portion (36) of the body (16). This enables pressure equalisation inside and outside of the cavity (22) about the seal bound outer surface portion (36) when the projectile (14) is travelling through the barrel (12).