




- (51) **International Patent Classification:**
F16K 1/52 (2006.01) *F24D 19/10* (2006.01)
F16K 3/26 (2006.01)
- (21) **International Application Number:**
PCT/SE2011/051152
- (22) **International Filing Date:**
28 September 2011 (28.09.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1001148-4 1 December 2010 (01.12.2010) SE
- (71) **Applicant (for all designated States except US):** TOUR & ANDERSSON AB [SE/SE]; S-52480 Ljung (SE).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** NORLANDER, Per [SE/SE]; Gästgivaregatan 5, S-44732 Vårgårda (SE). CORSO, Daniel [SE/SE]; Åkerstigen 3, S-52441 Ljung (SE). HELSTAD, Anders [SE/SE]; Mollaryd Björkäng, S-52495 Ljung (SE).
- (74) **Agent:** GOTAPATENT AB; Box 3127, S-55003 Jönköping (SE).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** REGULATING VALVE

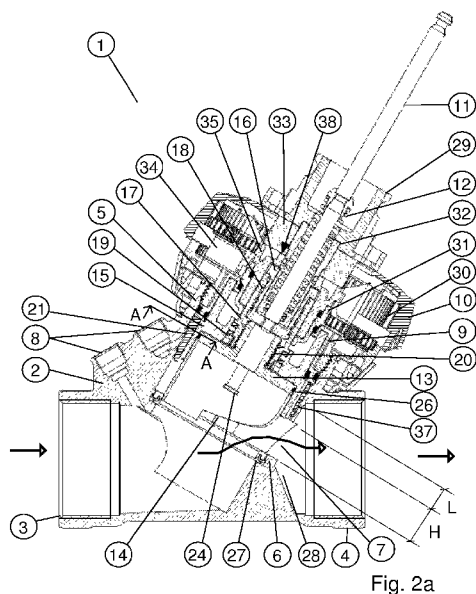

(57) **Abstract:** Device for flow control of a medium in a heating or cooling system where the device is a complete regulating valve (1), with a valve body (2) comprising an inlet connection (3), an outlet connection (4), a valve neck (5) in which a valve seat (6) and a flow through opening (7) are provided. In the valve neck (5) a complete valve trim (38) and a valve hand wheel (10) are provided, and through the valve hand wheel (10) and the complete valve trim (38) a valve shaft (11) with a return spring (12) are provided. The valve body (2) comprises a first cone (13), which determine the preset of the maximal flow through the complete regulating valve (1), i.e. the Kvs-value of the valve, by that the first cone (13) has at least one opening (14) for flowing through of the medium, where the design of the opening (14) determines the regulating characteristic of the complete regulating valve (1), and where the Kvs-value of the valve is changed continuously, with maintained regulating characteristic, by that the first cone (13) is arranged continuously, axially displaceable relative the valve seat (6), whereby selected parts of the opening (14) of the first cone are shielded by the valve seat (6).