



- (51) International Patent Classification:
B05B 1/14 (2006.01) *F28D 20/00* (2006.01)
B05B 1/26 (2006.01)
- (21) International Application Number:
PCT/SE2013/051282
- (22) International Filing Date:
1 November 2013 (01.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1251240-6 1 November 2012 (01.11.2012) SE
- (71) Applicant: **SKANSKA SVERIGE AB** [SE/SE];
Drottningtorget 14, S-205 33 Malmö (SE).
- (72) Inventor: **STRAND, Tobias**; Beckasinvägen 7, S-123 52
Farsta (SE).


(74) Agent: **AWAPATENT AB**; Box 5117, S-200 71 Malmö
(SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: NOZZLE FOR DISTRIBUTION OF A FLUID

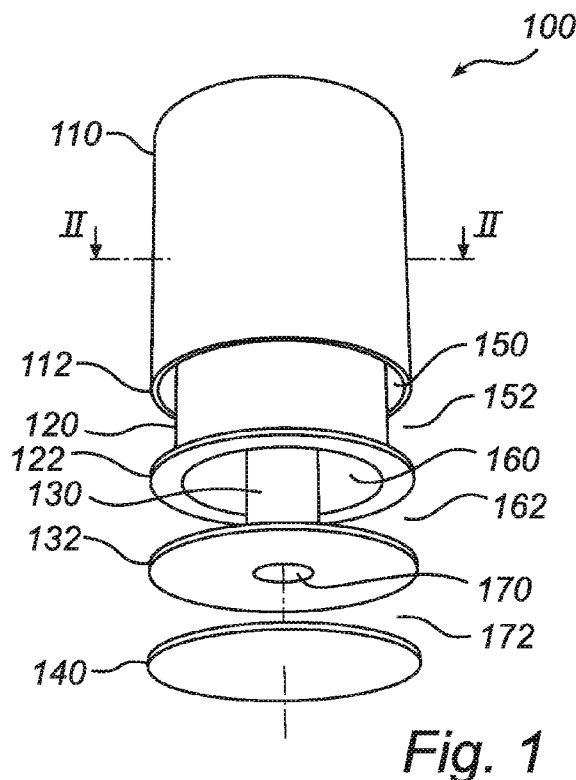

(57) Abstract: The present invention relates to a nozzle (100) for distribution of a fluid having a speed. The nozzle (100) defines a plurality of flow passages (150, 160, 170), at least one of the plurality of flow passages (150, 160, 170) is a central flow passage (160) and at least a first and a second of the plurality of flow passages (150, 160, 170) are outer flow passages (150, 170). The outlets (152, 172) of the outer flow passages (150, 170) are arranged on either side of the outlet (162) of the central flow passage (160). The second outer flow passage (170) has an inlet area (235) which is smaller than an outlet area (a3). A central axis of the inlets (210, 220, 230) is substantially perpendicular to a central plane of the outlets (152, 162, 172).



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, **Published:**

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*