



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

E04B 2/76, 9/12

A1

(11) International Publication Number:

WO 98/58139

(43) International Publication Date:

23 December 1998 (23.12.98)

(21) International Application Number:

PCT/SE97/01061

(22) International Filing Date:

17 June 1997 (17.06.97)

(71) Applicant (for all designated States except US): ABB FLÄKT
AKTIEBOLAG [SE/SE]; Sickla Allé 13, Nacka, S-120 86
Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LARSSON, Bertil [SE/SE];
Svängstigen 7, S-135 50 Tyresö (SE).

(74) Agents: JENKLER, Malte et al.; Asea Brown Boveri AB,
Patent, Stockholm Office, S-120 86 Stockholm (SE).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE
(Utility model), DK, DK (Utility model), EE, ES, FI, FI
(Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,
SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU,
ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,
GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ,
CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

In English translation (filed in Swedish).

(54) Title: BEAM CONSTRUCTION IN WALLS AND CEILINGS OF CLEAN AIR ROOMS

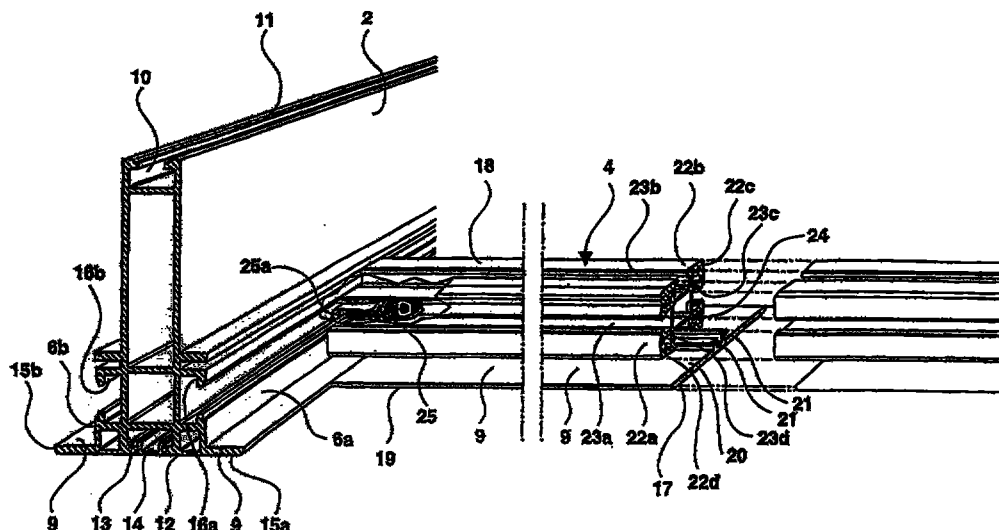

(57) Abstract

A beam construction for walls and ceilings in clean rooms comprises first longitudinal beams (2) and second transverse beams (4). The first and second beams are arranged essentially in parallel with the plane of extension of the wall and ceiling, respectively. The first and the second beams are further provided with elongate flanges (15a, 15b, 17) with supporting surfaces (9) which are also essentially parallel with the plane of extension of the wall and the ceiling, respectively. The wall/ceiling comprises wall/ceiling elements (8) which abut against the supporting surfaces (9). To accomplish good stability and simple mounting of the wall/ceiling, at least the second beams comprise an elongate flange means (17) with one or more supporting surfaces (9) and an elongate supporting means (18). The flange means (17) and the supporting means (18) are, at least before mounting, separable and/or axially displaceable relative to each other. After mounting, the supporting means (18) extends with both ends beyond both ends of the flange means (17).