

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 December 2006 (21.12.2006)

PCT

(10) International Publication Number  
**WO 2006/135471 A2**

(51) International Patent Classification:  
**B65D 51/00** (2006.01) **B65D 1/24** (2006.01)

(21) International Application Number:  
PCT/US2006/011756

(22) International Filing Date: 31 March 2006 (31.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/149,355 10 June 2005 (10.06.2005) US

(71) Applicant: **CHEN, Chung-Chin** [US/US]; 625 Slaters Lane, 4th Floor, Alexandria, VA 22314 (US).

(71) Applicant and

(72) Inventor: **WU, Kuo-Cheng**; No. 80, Sinciang Rd., Fongshan City, Kaohsiung County, 830 (TW).


(74) Agents: **URCIA, Benjamin, E.** et al.; BACON & THOMAS, PLLC, 625 Slaters Lane-4th Floor, Alexandria, VA 22314 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A CAP STRUCTURE FOR A CONTAINER OUTLET

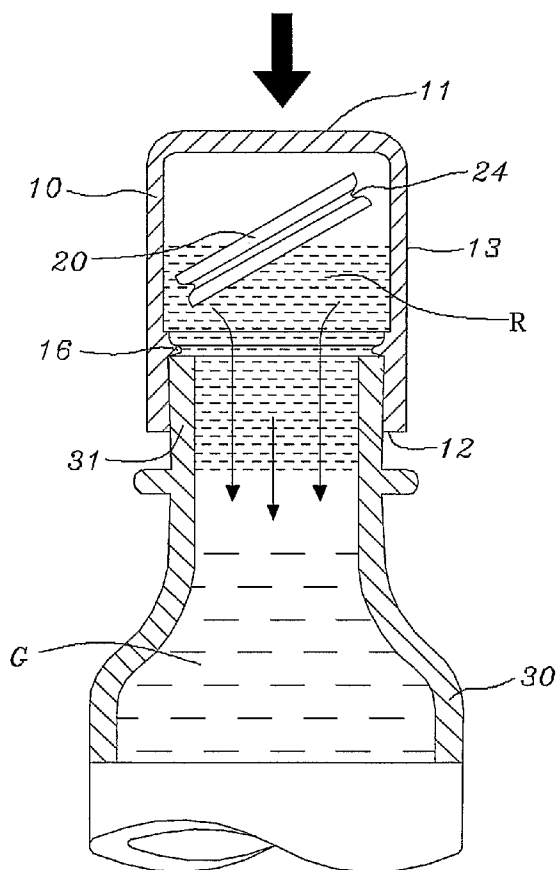

(57) Abstract: The present invention relates to a cap structure for a container outlet, which comprises a cap body and a separating blocker, wherein the top side of said cap body is contrived into closed plate, and its bottom side is contrived into vent opening, a lateral side links top side and bottom side such as being surrounded as an unitary body; a hollow compartment is created in said internal round top of said cap body, and a hollow cap linking channel is formed near the other end of said bottom side, and said separating blocker is inserted at the joint of said hollow compartment in said cap body and said cap linking channel, its top side faces said hollow compartment, and its bottom side faces said cap linking channel. Any granule solid or liquid material being stuffed in said hollow compartment in said cap body can be separated and blocked from leaking, if said separating blocker is inserted in duly position. After said cap linking channel at said bottom side of said cap body being sleeved and engaged with the vent opening of the container, it provides drinking user the effect of quickly mixing over two materials with each other in said container.



**Published:**

— without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*