

9805416-6

IPOS copy
NO COVER LETTER


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B65D 81/00		A1	(11) International Publication Number: WO 98/36991
			(43) International Publication Date: 27 August 1998 (27.08.98)
(21) International Application Number: PCT/JP98/00703		(81) Designated States: AU, CN, ID, KR, SG, US, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 20 February 1998 (20.02.98)			
(30) Priority Data: 9/37485 21 February 1997 (21.02.97) JP 9/234889 29 August 1997 (29.08.97) JP		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicants (for all designated States except US): KEY COFFEE INC [JP/JP]; 34-4, Nishi-Shimbashi 2-chome, Minato-ku, Tokyo 105-0003 (JP). YAMANAKA SANGYO KABUSHIKI KAISHA [JP/JP]; 17, Hanazono Ogino-cho, Ukyo-ku, Kyoto-shi, Kyoto 616-8044 (JP).			
(72) Inventors; and (75) Inventors/Applicants (for US only): OHTA, Keiji [JP/JP]; 1-17-6, Edakita, Aoba-ku, Yokohama-shi, Kanagawa 225-0015 (JP). SUZUKI, Kaichi [JP/JP]; 23-14, Hanazono Uchihata-cho, Ukyo-ku, Kyoto-shi, Kyoto 616-8045 (JP).			
(74) Agents: ISHIDA, Takashi et al.; A. Aoki & Associates, Toranomon 37 Mori Building, 5-1, Toranomon 3-chome, Minato-ku, Tokyo 105-8423 (JP).			

(54) Title: DRINK-EXTRACTING BAG EQUIPPED WITH HOLDING ELEMENT

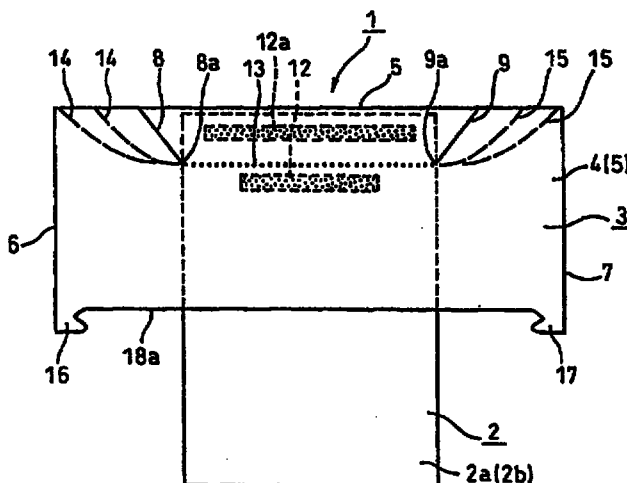

(57) Abstract

A support-equipped extracting bag for a drink, for example coffee, comprises an extracting bag member (2) containing therein a drink material to be extracted and having a front face section (2a) and back face section (2b) each comprising a filtering sheet; and a support member (3) attached to the bag member and covering an upper half portion of the bag member, to hygienically keep a top end of the bag member to be opened during storage and to enable the bag member to be stably and safely held in a cup, wherein the upper middle portion of the support member and the upper portion of the bag member can be opened by removing the upper middle portion of the support member and the upper portion of the bag member along cut lines (8 and 9) or vacant area (10 or 11) and a row of perforations (13) formed through the support and bag members, and by bending the right and left side upper portions of the support member inward along folds or dotted cuts (14 and 15) formed in the right and left side upper portions of the support member.