



(43) International Publication Date
7 June 2007 (07.06.2007)

(10) International Publication Number
WO 2007/063541 A2

(51) International Patent Classification:
E06B 3/70 (2006.01)

(74) Agent: APPELFELD ZER LAW FIRM; Beit Atid, 29 Lilinblum St., 65133 Tel Aviv (IL).

(21) International Application Number: PCT/IL2006/001377

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 29 November 2006 (29.11.2006)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
60/740,245 29 November 2005 (29.11.2005) US

(71) Applicant (for all designated States except US):
HARDOOR MECHANISM PRODUCTIONS LTD.
 [IL/IL]; Barshevski St., 75363 Rishon Lezion (IL).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GO, GW, ML, MR, NE, SN, TD, TG).

(71) Applicants and

(72) **Inventors:** **HALFON, Amos** [IL/IL]; 218 Almog St., 76834 Sitriya (IL). **HARARI, Mordechai** [IL/IL]; 53 Pinsker St., 75910 Rishon Lezion (IL).

[Continued on next page]

(54) Title: SYSTEM FOR POSITIONING SLIDING DOORS

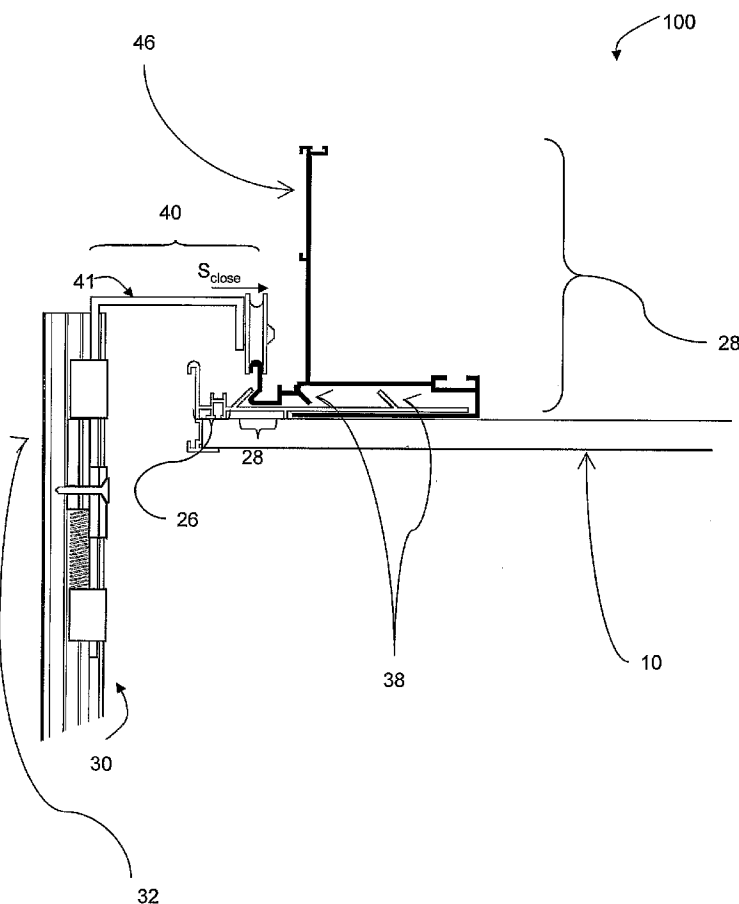

(57) Abstract: Presented herein is a novel sliding door system that that enables adjustment of at least two sliding doors relative to each other such that surfaces of the sliding doors create a substantially flush surface a support onto which the sliding door mechanism is mounted. The system includes at least one inner and outer sliding door slidably coupled to corresponding guide rails. The guide rail that is coupled to the outer sliding door is selectably moveable by a sliding door mechanism between a first and a second position. In the first position, a user can slide outer and inner sliding doors along said guide rails, whereas in the second position, a surface of the outer sliding door is substantially flush with a surface of said inner sliding door.



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.