

WO 96/31917

PCT/AU96/00185

1

TITLE OF THE INVENTION: Antenna

FIELD OF THE INVENTION: This invention relates to a rod antenna, in particular to a continuous solid rod whip antenna and in particular to a rod of selected stiffness and flexibility which may be extended or retracted and stored in a relatively small space. It further relates to a tubular member useful for flexible storage of such a rod antenna.

BACKGROUND OF THE INVENTION: Telescopic and rod antennas are known. The telescopic types of antenna have the disadvantage that they are complex to make and tend to be fragile. Both telescopic and rod antennas can be extended either by hand or using a motor.

Some known rod antennas are roof-mounted and column-feed of the type designed to be manually retracted. There are also whip antennas of the type which are externally fixed to the window column or roof and or other areas of the vehicle which are not raised or lowered manually.

Many metal antennas of the column-feed type consist of two or more sections of a telescopic type antenna. There has been a continuing attempt to reduce noise levels within modern vehicles. It has been found that the step-down between each section of a telescopic antenna creates undesirable wind noise. One attempt to eliminate this wind noise has involved replacing roof-mounted, column-feed type telescopic antennas with solid metal rods, providing a smooth antenna surface.

Solid rod metal antennas have disadvantages in that they are of excessive weight, are lacking in flexibility and distort permanently when kinked or bent. This distortion

WO 96/31917

PCT/AU96/00185

2

prevents manual raising or lowering. In addition, if the solid metal antenna catches on an external object, permanent damage to the vehicle may occur.

Both telescopic and rod antennas suffer from the difficulty that the telescopic section or the solid rod is likely to deform permanently upon collision forming an obstacle preventing the antenna from retracting.

It is one object of this invention to provide rod antennas which are tough as well as having a selected degree of flexibility.

It is a particular object of this invention to provide a whip or rod antenna of the type designed to be located at any suitable point of the vehicle and retracted or lowered either by motor or by hand.

It is a further object of this invention to provide a tubular member useful for flexible storage of a rod antenna.

BRIEF SUMMARY OF THE INVENTION: In one aspect, this invention provides a rod antenna which comprises a solid core selected from the group consisting of conductive and non-conductive cores overlaid by a filament-based element wrapped around the core at an angle to a line notionally drawn longitudinally along the core.

In another aspect, this invention provides a rod antenna which comprises a solid core selected from the group consisting of longitudinally arranged metallised non-metallic fibres and longitudinally arranged metal fibres.

In yet another aspect, this invention provides a rod of selected stiffness and flexibility which may be extended or retracted and stored in a relatively small space, wherein the

WO 96/31917

PCT/AU96/00185

3

dimensions of the rod and the material or materials from which it is made are so selected that:

the bending radius as measured by the survivable bend has a bend diameter (D) to antenna diameter (d) ratio of from 80 to 120 together with inherent built-in memory to allow the rod to return to the original straight position when released.

In a further aspect, this invention provides a tubular member useful for flexible storage of a rod antenna, which comprises a relatively flexible cylindrical housing provided with at least two anchoring means for attachment of the housing to a vehicle body.

BRIEF DESCRIPTION OF THE DRAWINGS: One embodiment of the invention is illustrated in the accompanying drawings, in which:

- Figure 1 is a partial cross-section view of a roof-mounted, column-feed, manually retractable antenna; and
- Figures 1 (a), 1(b) and 1(c) are details of the antenna of Figure 1.

The accompanying drawings also illustrate an embodiment of the invention in which:

- Figures 2 and 3 are side views of a retracted antenna in a housing;
- Figure 4 is a side view of the retracted antenna of Figures 2 and 3 showing the position of a motorised erecting and retracting unit;
- Figure 5 repeats the side view of Figure 2 but shows the retracted antenna in a housing inside that structure of a car adjacent its boot;

WO 96/31917

PCT/AU96/00185

4

- Figures 6(a) and 6(b) are side-views (perpendicular to each other) illustrating alternative motorised erecting and retracting units for use with the antenna of Figures 2 and 3; and
- Figure 7 illustrates a modification of the antenna of Figures 2 and 3, in particular a modified cylindrical housing.

DETAILED DESCRIPTION OF THE INVENTION: With regard to the first aspect, one example of filament-based element is braiding which involves interweaving groups of filaments. The groups of filaments are generally flat with filaments laid in parallel. Thus a first series of groups is interwoven with a second series of groups, one series being generally at right angles to the others. Interweaving involves generally laying one group over and under corresponding groups at right angles.

The braid may be laid around the core at a suitable angle selected from 5 degrees to 75 degrees to a line notionally drawn longitudinally along the core. The angle is preferably 40 degrees to 50 degrees.

As an alternative to braiding, filament winding may be used. Thus filaments are wound one over the other around the core but are not interlocked.

In another alternative, tapes or sheets of filaments may be wound around the core.

In yet another alternative, the tapes or sheets of conductive filaments may be woven.

In a further alternative a prewoven sock of filaments may be pulled over a core.

WO 96/31917

PCT/AU96/00185

5

In yet a further alternative, a heat-shrink sleeving comprising a conductive plastics material may be placed around a non-conductive core and then shrunk to produce an electrically conductive rod.

The solid core is preferably a polymeric material which is associated with or impregnated with a strengthening material such as fibreglass or carbon fibres.

Generally speaking electrical conductivity is on the surface of the rod antenna. Surface conductivity may be provided using carbon fibres, metal or metallised fibres.

The metallised fibres may be, for example, nickel-plates, silver-plates or aluminium. The fibres themselves may be, for example, fibreglass.

Metal fibres may be, for example, stainless steel, copper, or aluminium.

The solid core is preferably formed by pultrusion, which is a process in which continuous strands of fibrous reinforcing materials are pulled through a resin bath, a heated die, a pulling station and finally a cut-off unit.

Carbon fibres, metallised fibres or metal fibres may be pultruded over a suitable core, or fibreglass, carbon fibres, Kevlar fibres or boron fibres, for example. Such fibres may be oriented in the longitudinal direction or may be braided to provide the desired modulus, strength and flexibility. The modulus of the fibres is selected according to their electrical conductivity and desired flexibility.

The resin matrix may comprise a polyester or polyesters, a vinyl ester or esters or thermoset resin blends.

WO 96/31917

PCT/AU96/00185

6

Conductivity may be enhanced by the addition of conductive particles such as graphite flakes and/or powder, nickel or silver-plated carbon particles, for example, into the resin matrix.

Although the pultrusion method is preferred, it is possible to use for example, a method combining pultrusion with braiding. Other suitable means of producing rods for antennas include injection moulding and extrusion using chopped fibres and or particles of the type described above.

The word "rod" as used in this specification refers to elongated objects of various cross-sections including round, square and rectangular.

Preferably, the tensile strength of the rod at three standard deviations below the mean exceeds 1200 MPa when tested according to modified ASTM D - 3916.

Preferably, the tensile modulus at three standard deviations below the mean exceeds 50 GPa when tested according to ASTM D - 3916.

Preferably, the elongation at break is less than 3%.

Preferably, mounting shear splintering does not progress further than 30mm on a standard mounting shear splintering apparatus.

The rod should have inherent memory to return to its approximate straight position when fully extended.

WO 96/31917

PCT/AU96/00185

7

It is necessary to balance flexure and stiffness of the rod to ensure that the rod can maintain its memory to return to its original shape and be inserted into a space or tunnel having a selected shape.

In particular aspects, the material or materials from which the rod is made may be metallic, non-metallic or a combination of both. For example, the metallic material may be entirely of metal or metal coated with chromium or may be of metallised fibres. The non-metallic material may be carbon fibre, carbon mesh or carbon powder. Non-conducting fibre, such as glass fibre, may be used to form a foundation or core for the rod. Pultrusion may be used in the construction of the non-metallic rod or metal fibres or metallised fibres. Conductive particles, such as metal particles, may be used to improve conductivity.

It has been found that rods according to the invention provide reduced wind noise. The antenna housing and rod can be installed to any suitable location on a motor vehicle including windscreen pillars, roof, the front or rear fenders and/or boot.

Since the rods according to the invention may be retracted into a small space, the antenna length may be extended to provide further reception range.

The antenna according to the invention may be housed within a tube within a vehicle. This tube of selected stiffness may be left in a continuous straight length, bent into a selected shape or rolled up.

This invention also provides a rigid metal tube or pipe with an electrical insulated coating on the outer surface of the metal tube such as polyvinyl chloride, nylon, polypropylene or other suitable plastics material. The metal tube can be stainless steel, copper or a number of suitable electrically conductive metals capable of being pre-formed to a given shape.

WO 96/31917

PCT/AU96/00185

8

The tube can be preformed or bent into any desirable shape to suit the motor vehicle chassis and the various vehicle panels. This will facilitate ease of installation and consistency to ensure all antennas are fitted in precisely the same manner during motor vehicle building and installation of the antenna.

The antenna signal and co-axial cable can be connected to any point of the metal tube or at either end and not just at one end only as is the case with current forms of antennas.

Turning to Figure 1, an antenna rod 11 is capped by a top 12 and ends in a stop collar 13. Numeral 11A indicates a solid core which is overlaid by a filament - based element. A fixing anchor 14 fixes cylindrical housing 11 through base mould 15. Numeral 16 refers to a cylindrical housing, for example, of a suitable non-conductive plastics material, around antenna rod 11 which provides a guide. Numeral 17 refers to a coaxial cable to a radio.

Figure 2 relates to a manually-operated antenna and comprises an antenna rod 21, which is capped by a top 22 and ends in an antenna rod end stop 23. A locking nut 24 receives base mount 25 and connects flexible cylindrical housing 26 to vehicle panel 27.

In Figure 3, numeral 28 refers to a feeder cable.

Figure 4 relates to a power-driven antenna, in which numeral 29 refers to an electric motor for advancing or retracting antenna rod 21. Note that this motor is mounted away from the antenna mount, providing a space advantage.

WO 96/31917

PCT/AU96/00185

9

In Figure 5, numeral 30 refers to a vehicle as a whole, numeral 27 referring to a panel of a part of the vehicle 30. Thus antenna rod 21 may be stored in a boot of vehicle 30. The antenna could be power-driven.

In Figure 6(a) and 6(b), numeral 31 refers to rollers driven by friction-device motor 29 to advance or retract antenna rod 21.

Turning to Figure 7, numeral 40 refers to a metal tube coated with a suitable non-conductive plastics material such as nylon or polyvinyl chloride and number 41 refers to an alternative connection point for a feeder cable.

WO 96/31917

PCT/AU96/00185

10

Claims

THIS SHEET HAS BEEN
REPLACED



1. A rod antenna which comprises a solid core selected from the group consisting of conductive and non-conductive cores overlaid by a filament-based element wrapped around the core at an angle to a line notionally drawn longitudinally along the core.
2. An antenna as claimed in claim 1, wherein braid is laid around the core at a suitable angle selected from 5 degrees to 75 degrees to a line notionally drawn longitudinally along the core.
3. An antenna as claimed in claim 2, wherein the angle is 40 degrees to 50 degrees.
4. An antenna as claimed in claim 1, wherein filament winding is used, the filaments being wound one over the other around the core but are not interlocked.
5. An antenna as claimed in claim 1, wherein tapes or sheets of filaments are wound around the core.
6. An antenna as claimed in claim 5, wherein the tapes or sheets of conductive filaments are woven.
7. An antenna as claimed in claim 1, wherein a prewoven sock of filaments is pulled over a core.
8. An antenna as claimed in claim 1, wherein a heat-shrink sleeving comprising a conductive plastics material may be placed around a non-conductive core and then shrunk to produce an electrically conductive rod.

This Sheet Has Been Replaced



SUBSTITUTE SHEET (RULE 26)

WO 96/31917

THIS SHEET HAS BEEN
REPLACED

PCT/AU96/00185

11



9. An antenna as claimed in any one of claims 1 to 8, wherein the solid core is preferably a polymeric material which is associated with or impregnated with a strengthening material such as fibreglass or carbon fibres.
10. An antenna as claimed in any one of claims 1 to 9, wherein the solid core is preferably formed by pultrusion, which is a process in which continuous strands of fibrous reinforcing materials are pulled through a resin bath, a heated die, a pulling station and finally a cut-off unit.
11. An antenna as claimed in any one of claims 1 to 10, wherein the tensile strength of the rod at three standard deviations below the mean exceeds 1200 MPa when tested according to modified ASTM D - 3916.
12. An antenna as claimed in any one of claims 1 to 11, wherein the tensile modulus at three standard deviations below the mean exceeds 50 GPa when tested according to ASTM D - 3916.
13. An antenna as claimed in any one of claims 1 to 12, wherein the elongation at break is less than 3%.
14. An antenna as claimed in any one of claims 1 to 13, wherein mounting shear splintering does not progress further than 30mm on a standard mounting shear splintering apparatus.
15. An antenna as claimed in any one of claims 1 to 14 wherein the rod has inherent memory to return to its approximate straight position when fully extended, even after coiling or bending for extended periods in its retractable position.

This Sheet Has Been Replaced



SUBSTITUTE SHEET (RULE 26)

THIS SHEET HAS BEEN
REPLACED

WO 96/31917


PCT/AU96/00185

12



16. A rod antenna which comprises a solid core selected from the group consisting of longitudinally arranged metallised non-metallic fibres and longitudinally arranged metal fibres.
17. A rod of selected stiffness and flexibility which may be extended or retracted and stored in a relatively small space, wherein the dimensions of the rod and the material or materials from which it is made are so selected that:
- the bending radius as measured by the survivable bend has a bend diameter (D) to antenna diameter (d) ratio of from 80 to 120 together with inherent built-in memory to allow the rod to return to the original straight position when released.
18. A tubular member useful for flexible storage of a rod antenna, which comprises a relatively flexible cylindrical housing provided with at least two anchoring means for attachment of the housing to a vehicle body.

This Sheet Has Been Replaced






SUBSTITUTE SHEET (RULE 26)

WO 96/31917

PCT/AU96/00185


1/7

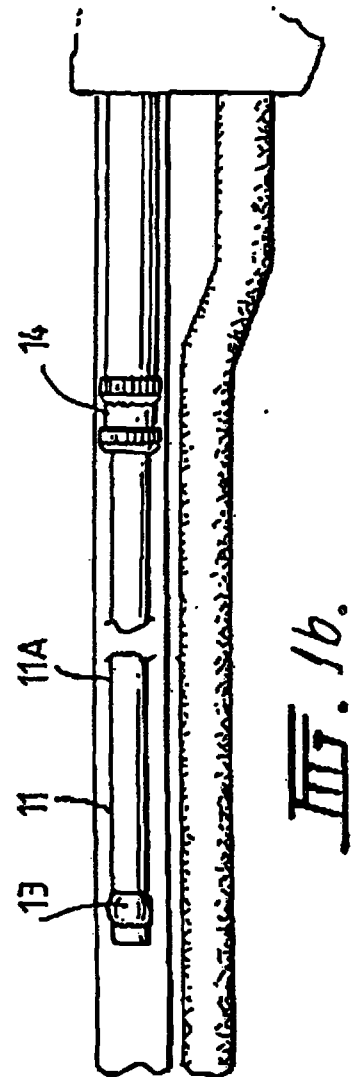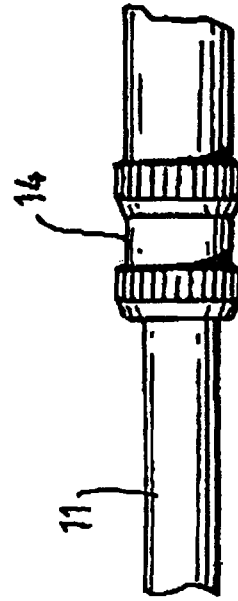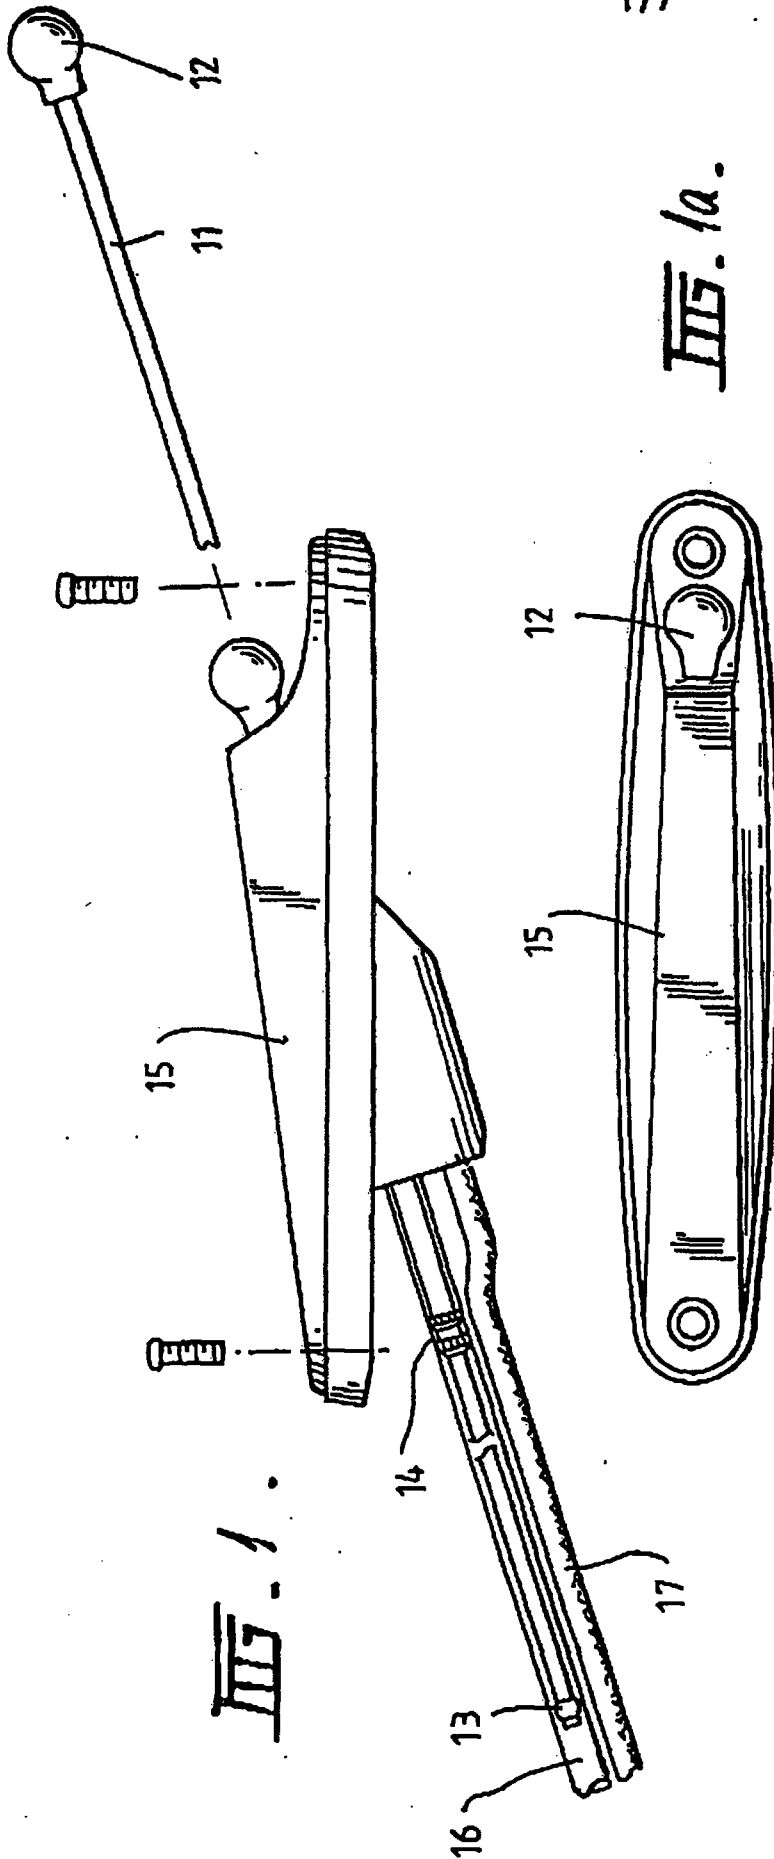

WO 96/31917

PCT/AU96/00185

2/7

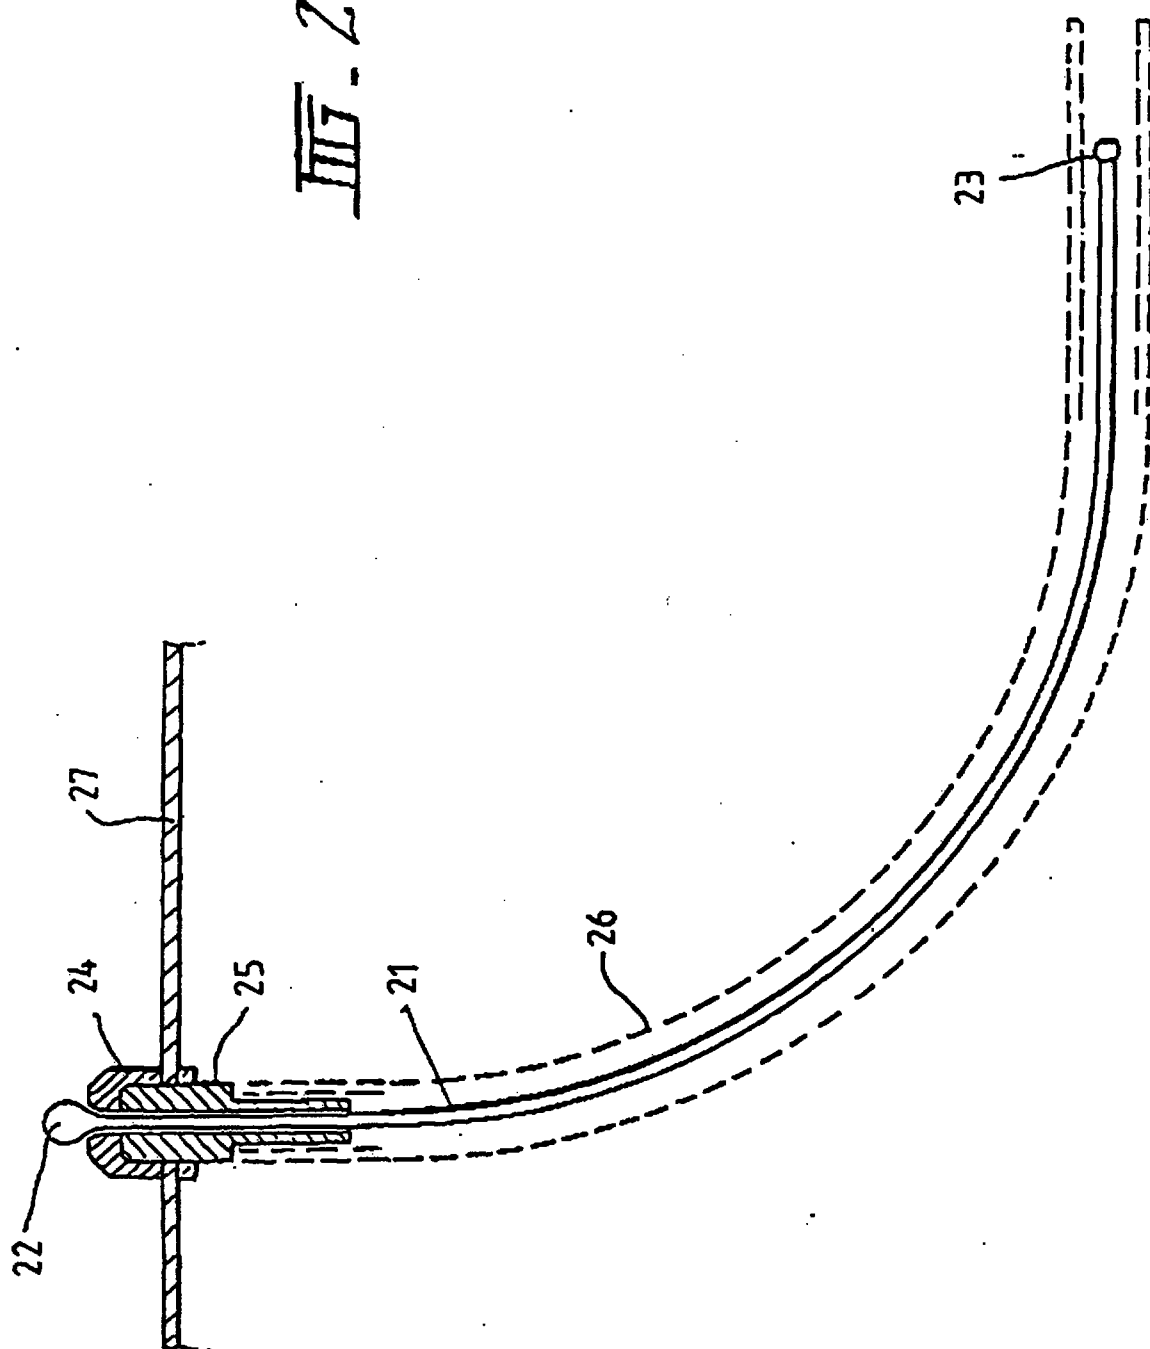FIG. 2.


SUBSTITUTE SHEET (RULE 26)

WO 96/31917

PCT/AU96/00185

3/7


III-3.

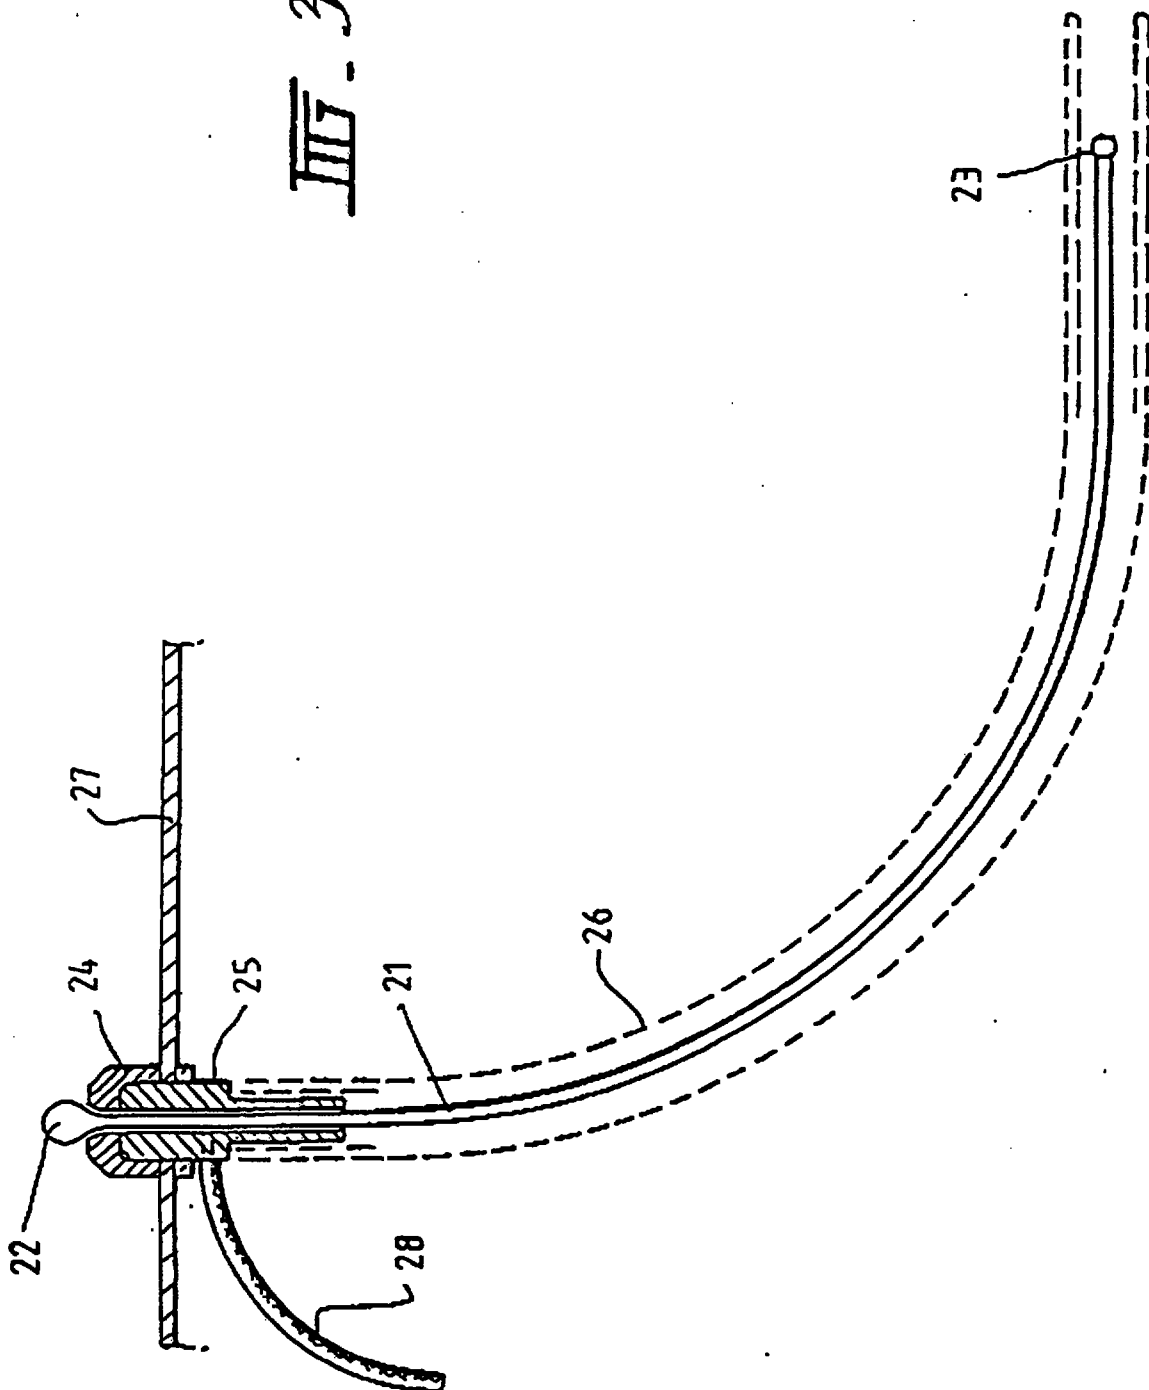

WO 96/31917

PCT/AU96/00185

4/7

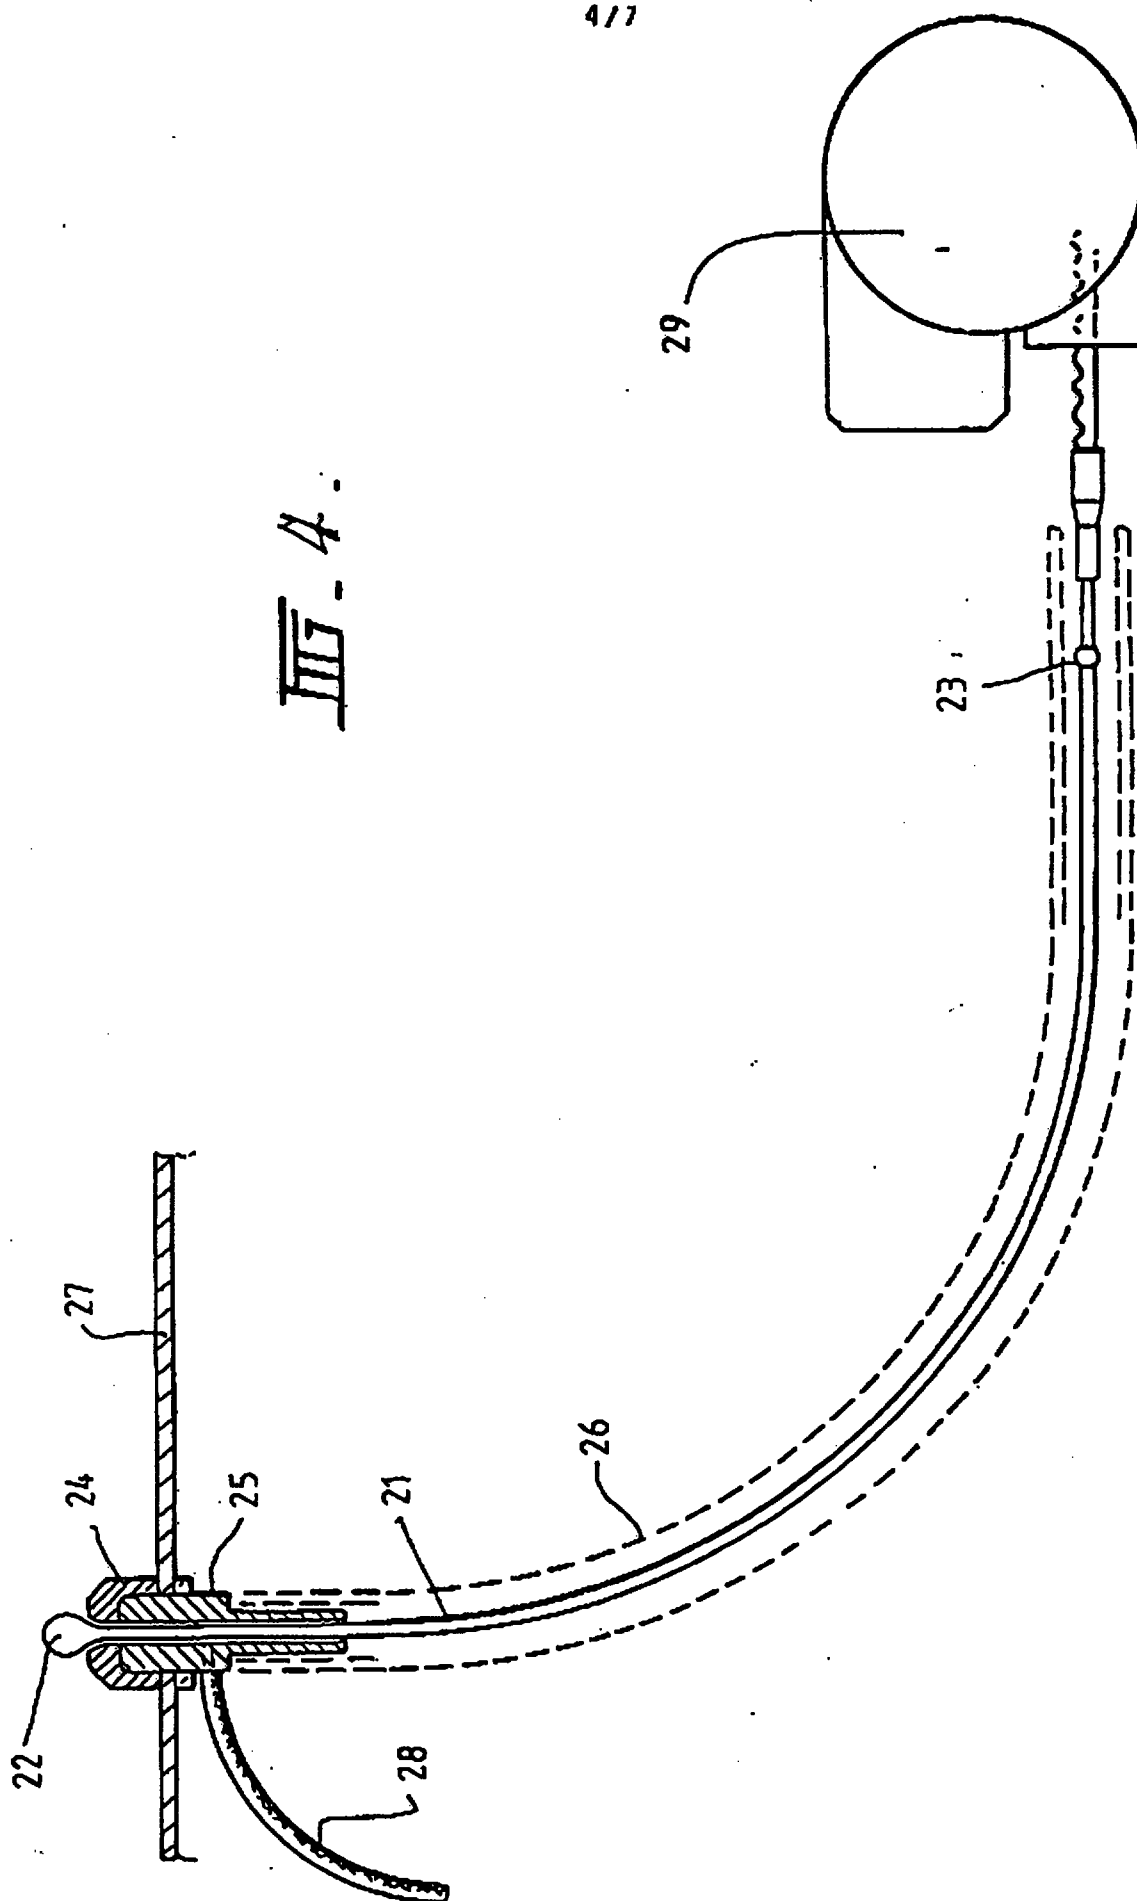


SUBSTITUTE SHEET (RULE 26)

WO 96/31917

PCT/AU96/00185

5/7

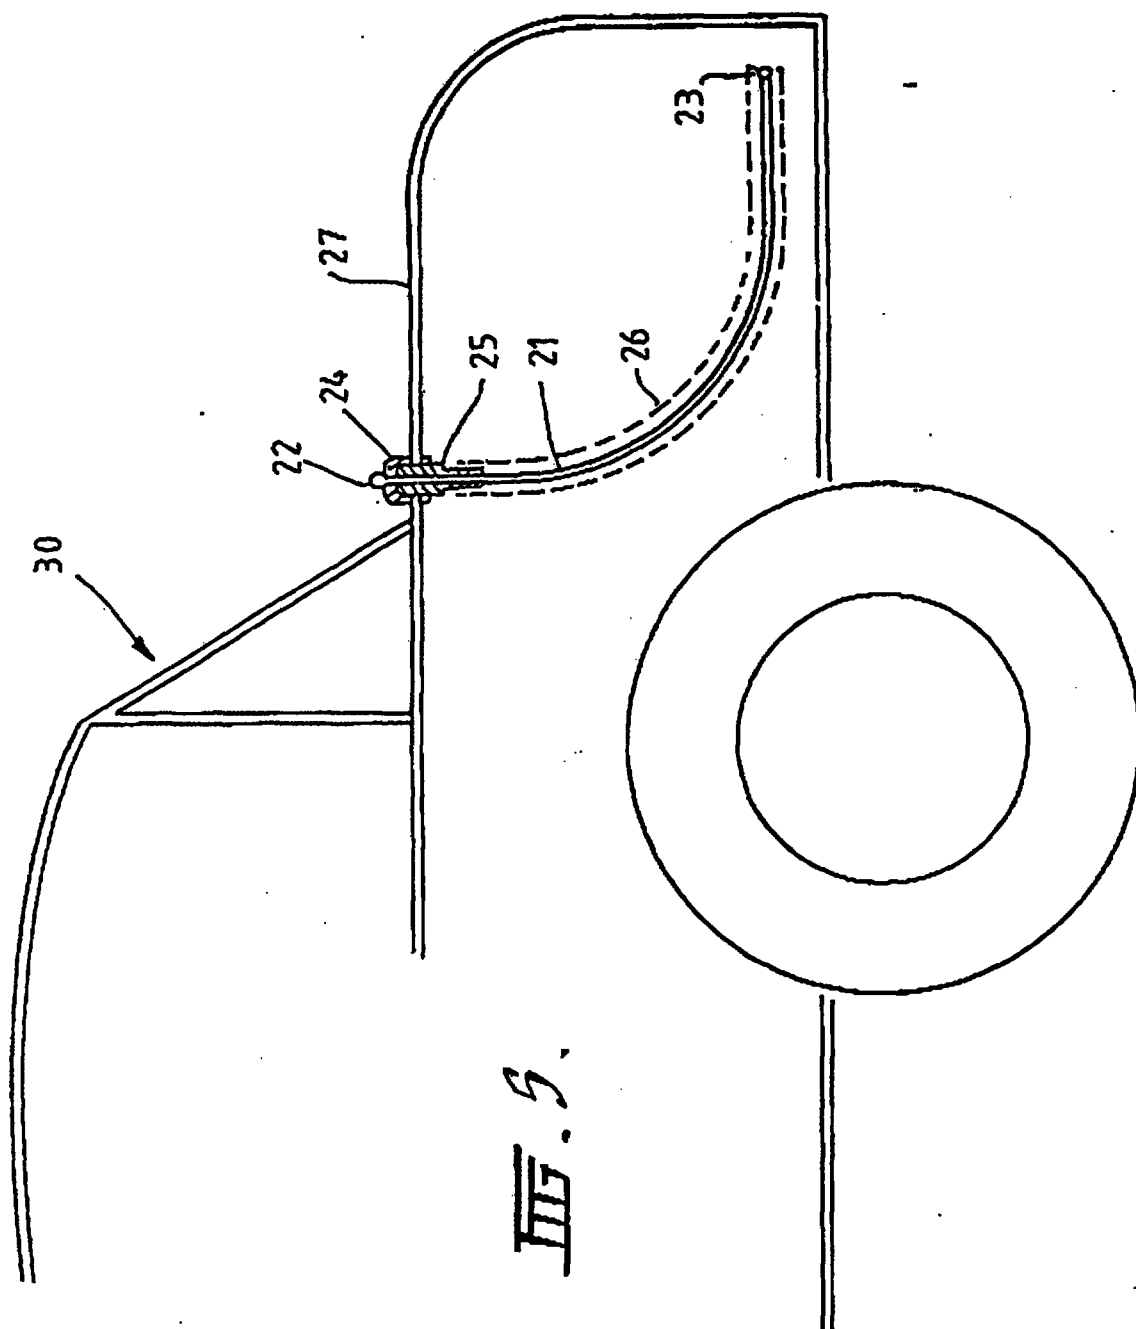


SUBSTITUTE SHEET (RULE 26)

WO 96/31917

PCT/AU96/00185

6/7

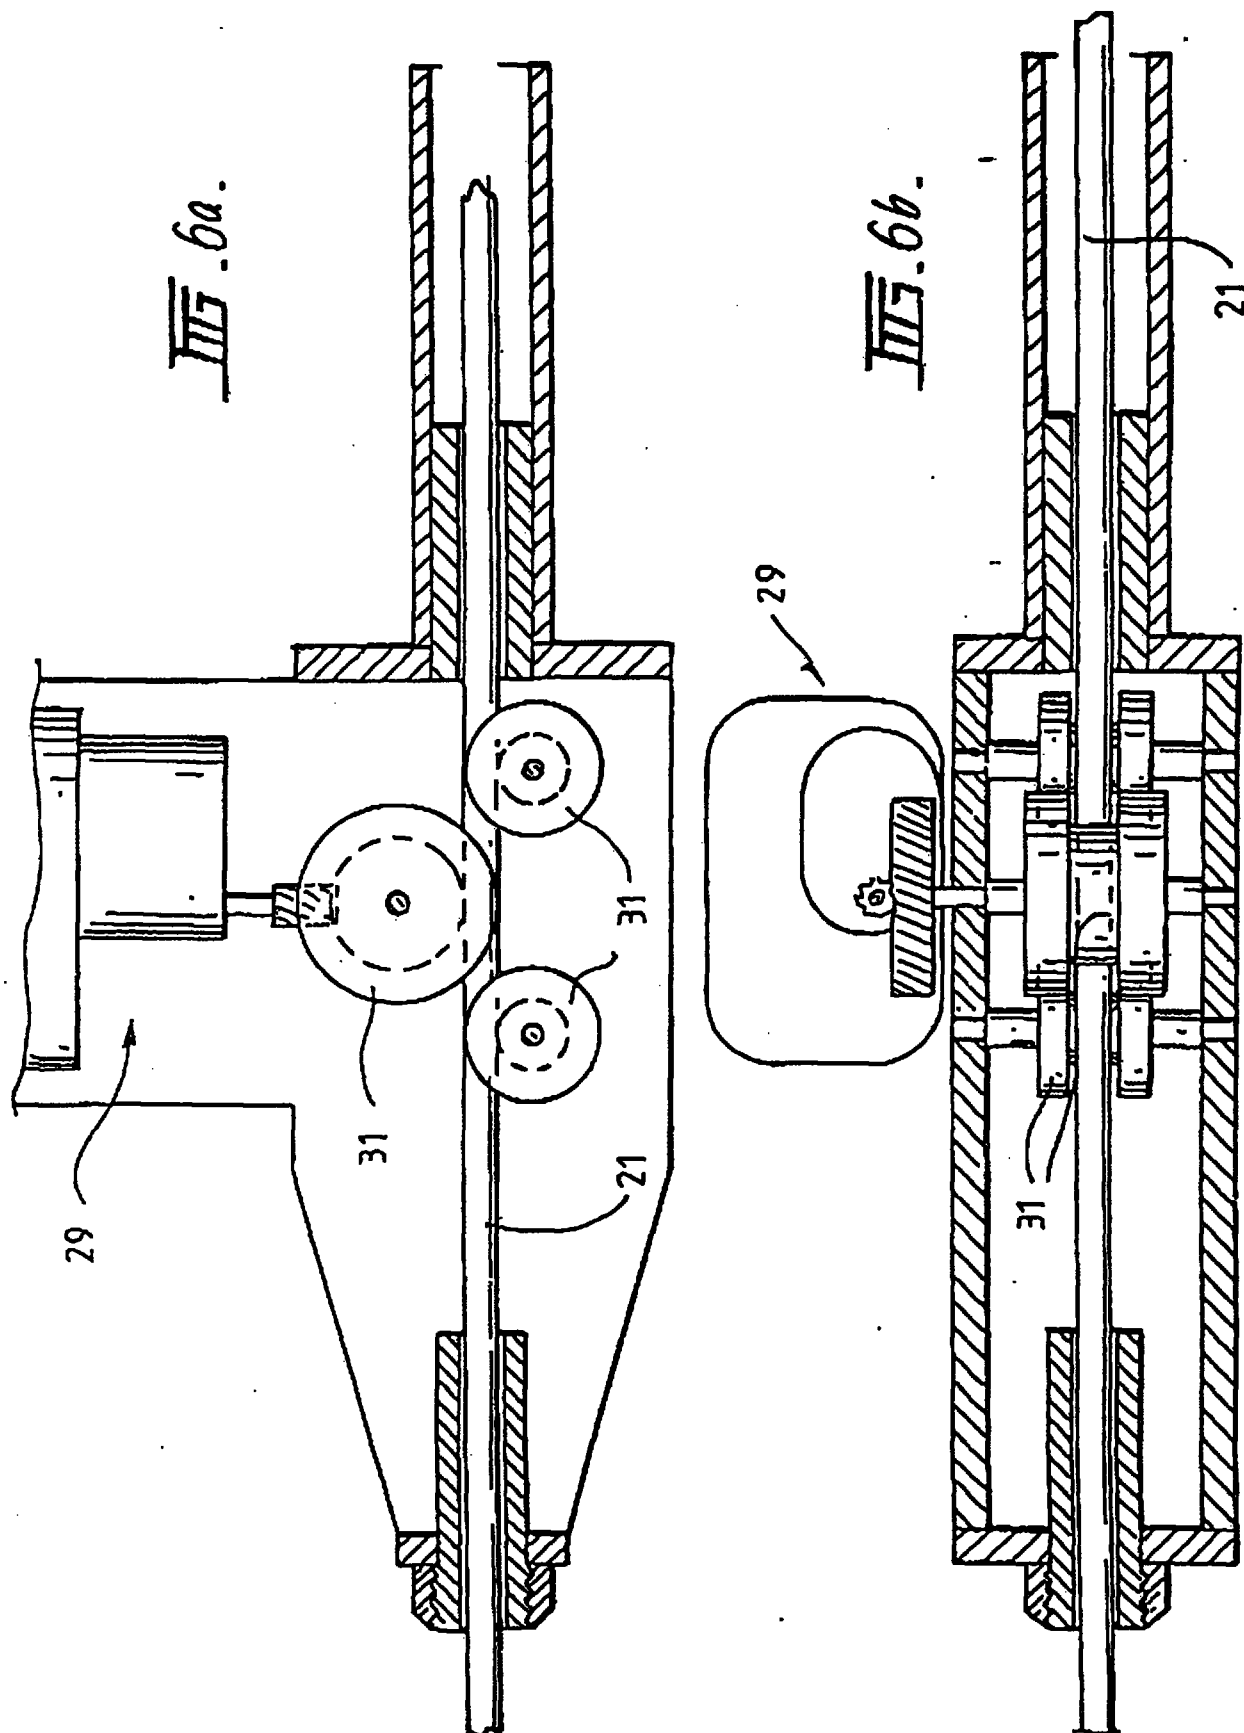


WO 96/31917

PCT/AU96/00185

7/7

FIG. 7.

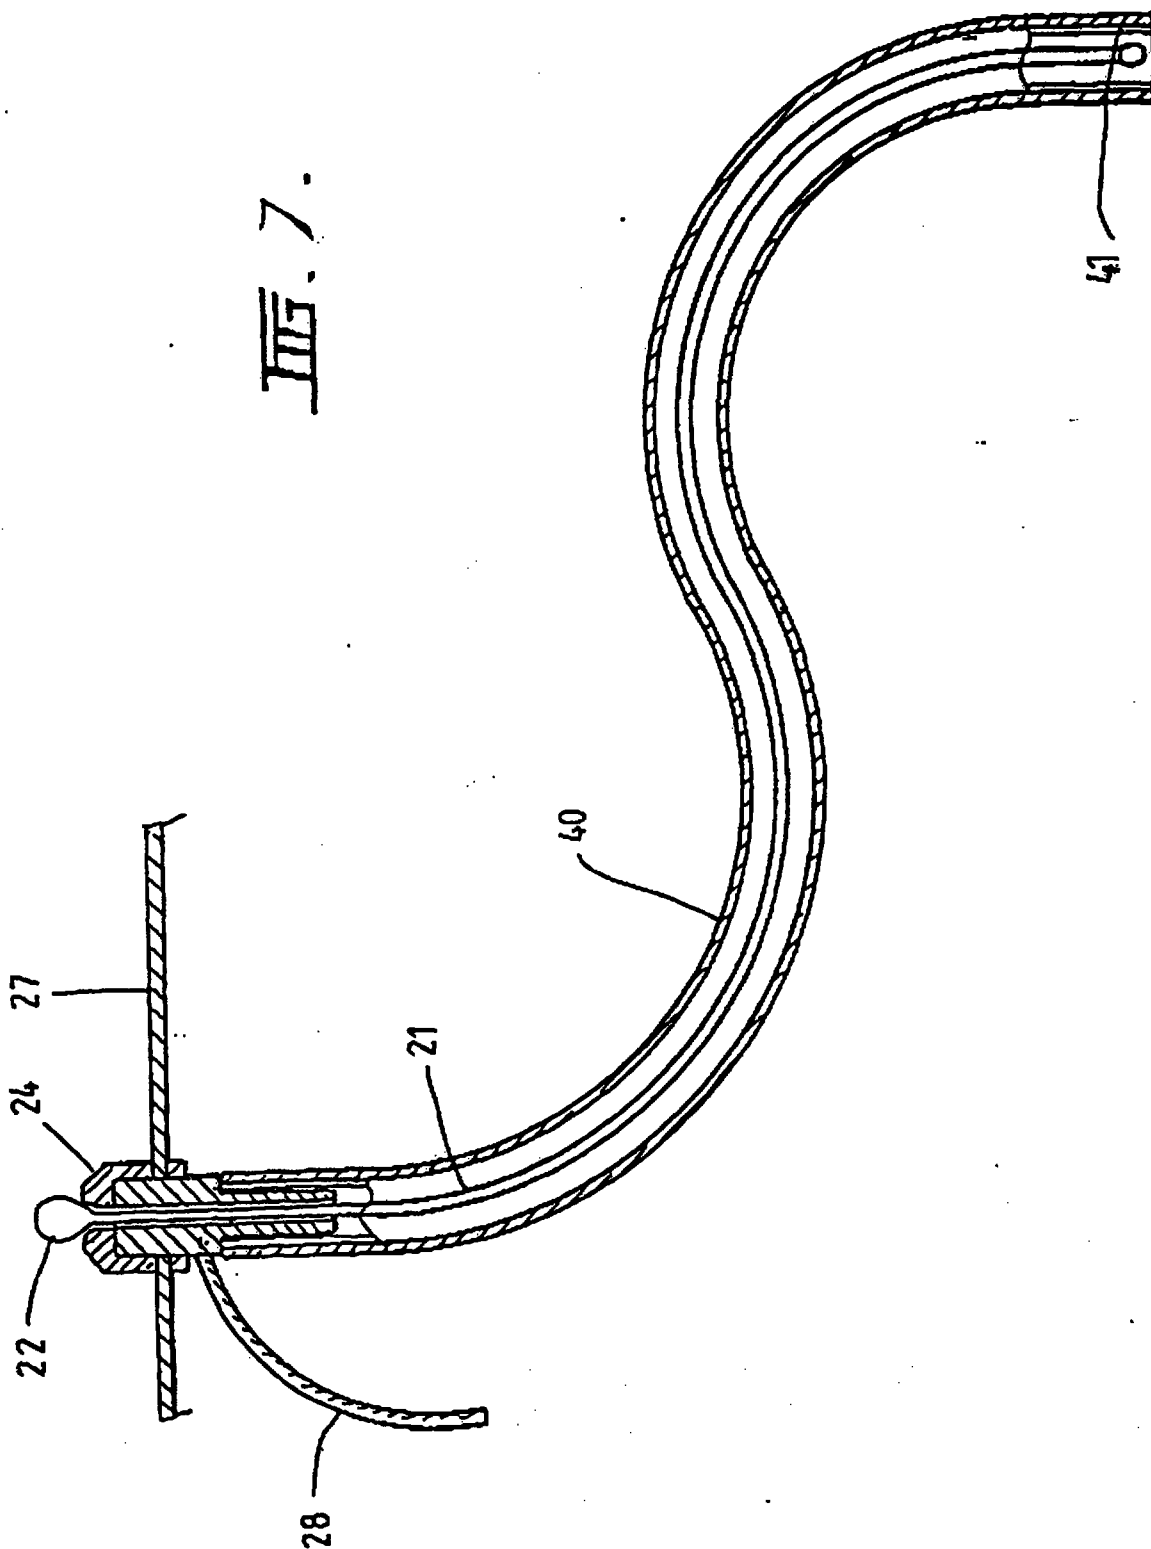

SUBSTITUTE SHEET (RULE 26)

OPI DATE 23/10/96 APPLN. ID 50970/96
 AOJP DATE 12/12/96 PCT NUMBER PCT/AU96/00185



AU9650970


RTMP COPY

IN

IPER + Annex

(51) International Patent Classification 6 : H01Q 1/08, 1/20, 1/32		A1	(11) International Publication Number: WO 96/31917
			(43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: PCT/AU96/00185		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 1 April 1996 (01.04.96)			
(30) Priority Data: PN 2179 6 April 1995 (06.04.95) AU PN 8194 21 February 1996 (21.02.96) AU			
(71)(72) Applicant and Inventor: MATTHEWS, Robert, Lenes (AU/AU); 22 Warner Court, Donvale, VIC 3111 (AU).		Published With international search report.	
(74) Agent: MURRAY, James; James Murray & Co., Suite 12, 118 Church Street, Hawthorn, VIC 3122 (AU).			

(54) Title: ANTENNA

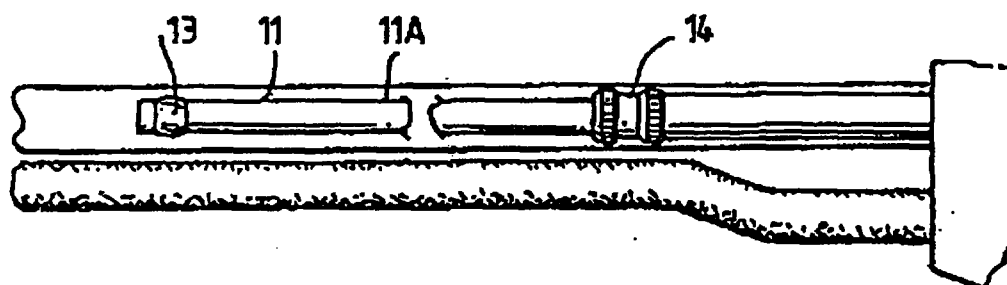

(57) Abstract

A rod antenna (11) which comprises a solid core (11A) selected from the group consisting of conductive and non-conductive cores overlaid by a filament-based element wrapped around the core at an angle to a line notionally drawn longitudinally along the core.



Claims

1. A ground vehicle rod antenna of selected stiffness and flexibility which may be extended or retracted and stored as a single element in a relatively small space, in particular a tubular space extending in shape up to substantially a half hoop, wherein the dimensions of the rod and the material or materials from which it is made are so selected that:

the bending radius as measured by the survivable bend has a bend diameter (D) to antenna diameter (d) ratio of from 80 to 120 together with inherent built-in memory to allow the rod to return to the original straight position when released, and wherein

the characteristics of the rod are such that it withstands the winds generated or experienced by ground vehicles at speeds up to their normal maximum.

2. An antenna as claimed in claim 1, which comprises a solid core selected from the group consisting of conductive and non-conductive cores overlaid by a filament-based element wrapped around the core at an angle to a line notionally drawn longitudinally along the core.
3. An antenna as claimed in claim 2, wherein braid is laid around the core at a suitable angle selected from 5 degrees to 75 degrees to a line notionally drawn longitudinally along the core.
4. An antenna as claimed in claim 3 wherein the angle is 40 degrees to 50 degrees.



5. An antenna as claimed in claim 2 wherein filament winding is used, the filaments being wound one over the other around the core but are not interlocked.
6. An antenna as claimed in claim 2 wherein tapes or sheets of filaments are wound around the core.
7. An antenna as claimed in claim 6, wherein the tapes or sheets of conductive filaments are woven.
8. An antenna as claimed in claim 2, wherein a prewoven sock of filaments is pulled over a core.
9. An antenna as claimed in claim 2, wherein a heat-shrink sleeving comprising a conductive plastics material may be placed around a non-conductive core and then shrunk to produce an electrically conductive rod.
10. An antenna as claimed in any one of claims 2 to 9, wherein the solid core is preferably a polymeric material which is associated with or impregnated with a strengthening material such as fibreglass or carbon fibres.
11. An antenna as claimed in any one of claims 2 to 10, wherein the solid core is preferably formed by pultrusion, which is a process in which continuous strands of fibrous reinforcing materials are pulled through a resin bath, a heated die, a pulling station and finally a cut-off unit.



11

12. An antenna as claimed in any one of claims 2 to 11, wherein the tensile strength of the rod at three standard deviations below the mean exceeds 1200 MPa when tested according to ASTM D - 3916.
13. An antenna as claimed in any one of claims 2 to 12, wherein the tensile modulus at three standard deviations below the mean exceeds 50 GPa when tested according to ASTM D - 3916.
14. An antenna as claimed in any one of claims 2 to 13, wherein the elongation at break is less than 3%.
15. An antenna as claimed in any one of claims 2 to 14, wherein mounting shear splintering does not progress further than 30 mm on a standard mounting shear splintering apparatus.
16. An antenna as claimed in any one of claims 1 to 15 wherein the rod has inherent memory to return to its approximate straight position when fully extended, even after coiling or bending for extended periods in its retractable position.
17. An antenna as claimed in any one of claims 1 to 16 which comprises a solid core selected from the group consisting of longitudinally arranged metallised non-metallic fibres and longitudinally arranged metal fibres.
18. An antenna as claimed in any one of claim 1, wherein the solid core is preferably a polymeric material which is associated with or impregnated with a strengthening material such as fibreglass or carbon fibres.



12

PCT/AU 9 6 / 0 0 1 8 5
RECEIVED 0 3 MAR 1997

19. An antenna as claimed in any one of claims 1 or 18, wherein the solid core is preferably formed by pultrusion, which is a process in which continuous strands of fibrous reinforcing materials are pulled through a resin bath, a heated die, a pulling station and finally a cut-off unit.
20. An antenna as claimed in any one of claims 1, 18 or 19, wherein the tensile strength of the rod at three standard deviations below the mean exceeds 1200 MPa when tested according to ASTM D - 3916.
21. An antenna as claimed in any one of claims 1 or 18 to 20, wherein the tensile modulus at three standard deviations below the mean exceeds 50 GPa when tested according to ASTM D - 3916.
22. An antenna as claimed in any one of claims 1 or 18 to 21, wherein the elongation at break is less than 3%.
23. An antenna as claimed in any one of claims 1 or 18 to 22, wherein mounting shear splintering does not progress further than 30 mm on a standard mounting shear splintering apparatus.
24. An antenna as claimed in any one of claims 1 or 18 to 23 wherein the rod has inherent memory to return to its approximate straight position when fully extended, even after coiling or bending for extended periods in its retractable position.
25. An antenna as claimed in any one of claims 1 or 18 to 24 which comprises a solid core selected from the group consisting of longitudinally arranged metallised non-metallic fibres and longitudinally arranged metal fibres.



26. An antenna as claimed in claims 1 to 25 wherein the rod is of such selected stiffness and flexibility that it may be shaped and positioned so as to project within the frame of a vehicle body.
27. A tubular member useful for flexible storage of a rod antenna, as claimed in claim 1 which comprises a relatively flexible cylindrical housing provided with at least two anchoring means for attachment of the housing to a vehicle body.