

COLOR PICTURE TUBE HAVING AN INLINE ELECTRON GUN
WITH AN ASTIGMATIC PREFOCUSING LENS

This invention relates to a color picture tube having an inline electron gun and, particularly, to an electron gun having three lenses including an asymmetric prefocusing lens.

An electron gun, such as a six electrode gun, designed for use in a large screen entertainment-type color picture tube must be capable of generating small-sized high-current electron beam spots over the entire screen. A conventional television receiver utilizes a color picture tube with an inline electron gun and a self-converging deflection yoke, for providing a horizontal deflection field having a pincushion-shaped distortion and a vertical deflection field having a barrel-shaped distortion. The fringe fields of such a yoke introduce into the tube strong astigmatism and deflection defocusing caused, primarily, by vertical overfocusing and, secondarily, by horizontal underfocusing of the deflected electron beams. Beam spots formed by the electron beams passing through such distorted horizontal and vertical deflection fields are asymmetrically-shaped when deflected to the periphery of the screen. Additionally, many inline electron guns exhibit misconvergence of the outer electron beams due to a change in the strength of the electron lens caused by changes in the focus voltage. Such a misconvergence results in a variation in beam landing position with changes in focus voltage. The present invention addresses these problems in an expeditious and cost effective manner without sacrificing performance.

This Sheet Has Been Replaced



REPLACED SHEETS	
☒ Description	: paged 1 to paged 18
☒ Claim(s)	: paged 19 to paged 24
☒ Drawing(s)	: paged 25 to paged 26
☒ Abstract	: paged 27 to paged 27
DATE OF RECEIPT	



1

The present invention provides an improvement in a color picture tube having an inline electron gun for generating and directing three inline electron beams along coplanar beam paths toward a screen. The gun includes a plurality of electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens for the electron beams. The improvement resides within the prefocusing lens, which includes four active surfaces. At least one of the active surfaces has asymmetric prefocusing means formed therein.

In the drawings:

Fig. 1 is a plan view, partially in axial section, of a shadow mask color picture tube embodying the invention.

Figs. 2 and 3 are schematic axial section side views of electron guns with which the invention may be employed.

Fig. 4 is an axial section top view of a novel electron gun in accordance with the present invention.

Fig. 5 is a partial section top view of a first embodiment of the prefocusing lens of the present invention.

Fig. 6 is a section view of an electrode of the prefocusing lens of Fig. 5, taken along line 6-6.

Fig. 7 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens electrode of Fig. 5.

Figs. 8 and 9 are section views of the electron gun shown in Fig. 4, taken along lines 8-8 and 9-9.

Fig. 10 is a partial section top view of a second embodiment of the prefocusing lens of the present invention.

Fig. 11 is a section view of an electrode of the prefocusing lens of Fig. 10, taken along line 11-11.

Fig. 12 is a graph of the beam current density contour at the center of the screen for an electron gun

1 utilizing the prefocusing lens of Fig. 10.

Fig. 13 is a partial section top view of a third embodiment of the prefocusing lens of the present invention.

5 Fig. 14 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 13.

Fig. 15 is a partial section top view of a fourth embodiment of the prefocusing lens of the present invention.

Fig. 16 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 15.

Fig. 17 is a section view of a prior embodiment of an electrode of the prefocusing lens.

Fig. 18 is a graph of the beam current density contour at the center of the screen for an electron gun using the prior prefocusing lens electrode of Fig. 17.

20 Fig. 1 shows a rectangular color picture tube 10 having a glass envelope 11 comprising a rectangular faceplate panel 12 and a tubular neck 14 connected by a rectangular funnel 16. The panel 12 comprises a viewing faceplate 18 and a peripheral flange or sidewall 20 which is sealed to the funnel 16 with a frit seal 21. A mosaic three-color phosphor screen 22 is located on the inner surface of the faceplate 18. The screen is preferably a line screen with the phosphor lines extending substantially perpendicular to the high frequency raster line scan of the tube (normal to the plane of Fig. 1). Alternatively, the screen could be a dot screen. A multiapertured color selection electrode or shadow mask 24 is removably mounted, by conventional means, in predetermined, spaced relation to the screen 22. An improved inline electron gun 26, shown schematically by dashed lines in Fig. 1, is centrally mounted within the neck 14 to generate and direct three



1 electron beams 28, along coplanar convergent beam paths,
through the mask 24 to the screen 22.

The tube of Fig. 1 is designed to be used with an
external magnetic deflection yoke, such as the yoke 30,
5 located in the neighborhood of the funnel-to-neck
junction. When activated, the yoke 30 subjects the three
beams 28 to magnetic fields which cause the beams to scan
horizontally and vertically, in a rectangular raster, over
the screen 22. The initial plane of deflection (at zero
10 deflection) is shown by the line P-P in Fig. 1, at about
the middle of the yoke 30. Because of fringe fields, the
zone of deflection of the tube extends axially from the
yoke 30 into the region of the gun 26. For simplicity, the
actual curvature of the deflection beam paths in the
15 deflection zone is not shown in Fig. 1.

The inline electron gun 26 includes six electrodes,
G1 through G6, in addition to the cathodes, K. The gun
may be of a first type 26', shown in Fig. 2, in which the
G2 and G4 electrodes are interconnected and operated at a
20 first potential, and the G3 and G5 electrodes are
interconnected and operated at a second potential; or the
gun may be of a second type 26'', shown in Fig. 3, in which
the G3 and G5 electrodes are interconnected and operated at
a third potential, and the G4 and G6 electrodes are
25 interconnected and operated at a fourth potential. In each
of the electron guns 26' and 26'', three electron lenses,
L₁, L₂, and L₃, are formed by the above-identified
electrodes. The present invention relates primarily to the
second or prefocusing lens, L₂.

30 The details of a first embodiment of the novel
electron gun 26' are shown in Figs. 4 through 9. With
reference to Fig. 4, the gun 26' comprises three equally
spaced coplanar cathodes 42 (one for each beam); a control
grid 44 (G1); a screen grid 46 (G2); a third electrode 48
35 (G3); a fourth electrode 50 (G4); a fifth electrode 52
(G5), the G5 electrode including a portion G5' identified
as element 54, for a purpose described below; and
a sixth electrode 56 (G6). The electrodes are spaced



1 from the cathodes, in the order named, and are attached to a pair of support rods (not shown).

5 The G1 electrode 44, the G2 electrode 46 and a first portion 72 of the G3 electrode 48, facing the G2 electrode 46, comprise a beam-forming region of the electron gun 26' and form the first electron lens, L1. Another portion 74 of the G3 electrode 48, the G4 electrode 50 and the G5 electrode 52 comprise an asymmetric prefocusing or second electron lens, L2, one embodiment of which is shown in Fig. 10 5. The element (G5' electrode portion) 54 and the G6 electrode 56 comprise a third or main focusing lens L3.

15 Each cathode 42 comprises a cathode sleeve 58 closed at its forward end by a cap 60 having an end coating 62 of an electron emissive material thereon, as is known in the art. Each cathode 42 is indirectly heated by a heater coil (not shown) positioned within the sleeve 58.

20 The G1 and G2 electrodes, 44 and 46, are two closely spaced, substantially flat, plates each having three inline apertures, 64 and 66, respectively, therethrough. The apertures 64 and 66 are centered with the cathode coating 62 to initiate three equally-spaced coplanar electron beams 28 (shown in Fig. 1), which are directed towards the screen 22. Preferably, the initial electron beam paths are substantially parallel, with the 25 middle path coinciding with the central axis, A-A, of the electron gun.

30 The G3 electrode 48 includes a substantially flat outer plate portion 68 having three inline apertures 70 therethrough, which are aligned with the apertures 66 and 64 in the G2 and G1 electrodes, 46 and 44, respectively. The G3 electrode 48 also includes a pair of cup-shaped first and second portions, 72 and 74, respectively, which are joined together at their open ends. The first portion 72 has three inline apertures 76, formed through the bottom of the cup, which are aligned with the apertures 70 in the 35 plate 68. The second portion 74 of the G3 electrode has three apertures 78 formed through its bottom, which are aligned with the apertures 76 in the first portion 72.



1 Extrusions 79 surround the apertures 78. Alternatively,
the plate portion 68, with its inline apertures 70, may be
formed as an internal part of the first portion 72.

5 As shown in Fig. 5, the G4 electrode 50 comprises a
plate having identically-shaped recesses 51a and 51b formed
in the opposed major surfaces thereof. Three inline
apertures 80 are formed through the body of the electrode
50, within the recesses 51a and 51b, and aligned with the
apertures 78 in the G3 electrode 48.

10 Again with respect to Fig. 4, the G5 electrode 52 is
a deep-drawn, cup-shaped member having three apertures 82,
surrounded by extrusions 83, formed in the bottom end
thereof. A substantially flat plate member 84, having
three apertures 86, aligned with the apertures 82, is
15 attached to and closes the open end of the G5 electrode
52. A first plate portion 88, having a plurality of
openings 90 therein, is attached to the opposite surface of
the plate member 84.

The G5' electrode portion 54 comprises a deep-drawn,
20 cup-shaped member having a recess 92 formed in the bottom
end thereto, with three inline apertures 94 extending
therethrough. Extrusions 95 surround the apertures 94. The
opposite open end of the G5' electrode portion 54 is closed by
a second plate portion 96 having three openings 98 formed
25 therethrough. The openings 98 are aligned and cooperate
with the openings 90, in the first plate portion 88, in a
manner described below.

The G6 electrode 56 is a cup-shaped, deep-drawn
member having a large opening 100 at one end through which
30 all three electron beams pass, and an open end which is
attached to and closed by a plate member 102 that has three
apertures 104 therethrough which are aligned with the
apertures 94 in the G5' electrode portion 54. Extrusions 105
surround the apertures 104.

35 The shape of the recess 51b, formed in the G4
electrode 50, is shown in Fig. 6. The recesses 51a and 51b
have a uniform vertical height at each of the apertures 80
and have rounded ends. Such a shape has been referred to



1 as the "race-track" shape. The recess 92, formed in the
bottom end of the G5' electrode portion 54, is also race-
track shaped, but it differs dimensionally from the recesses
51a and 51b in the G4 electrode 50 as described below.

5 The shape of the large opening 100 in the G6
electrode 54 is shown in Fig. 8. The opening 100 is
vertically higher at the outside apertures 104 than it is
at the center aperture. Such a shape has been referred to
as the "dog-bone" or "barbell" shape.

10 With respect to Fig. 4, the first plate portion 88
of the G5 electrode 52 faces the second plate portion 96 of
the G5' electrode portion 54. The apertures 90 in the first
plate portion 88 have extrusions extending from the plate
portion that have been divided into two segments, 106 and 108,
15 for each aperture. The apertures 98 in the second plate portion
96 of the G5' electrode portion 54 also have extrusions
extending from the plate portion 96 that have been divided
into two segments, 110 and 112, for each aperture. As
shown in Fig. 9, the segments 106 and 108 are interleaved
20 with the segments 110 and 112. These segments are used to
create quadrupole lenses in the paths of each electron beam
when different potentials are applied to the G5 and G5'
electrode and electrode portion 52 and 54, respectively. By
proper application of a dynamic voltage differential to either
25 the G5 electrode 52 or the G5' electrode portion 54, it is
possible to use the quadrupole lenses established by the
segments 106, 108, 110 and 112 to provide an astigmatic correction
to the electron beams, which compensates for astigmatism occurring
in either the electron gun or the deflection yoke. Such a
30 quadrupole lens structure is described in U.S. Pat. No.
4,731,563, issued to Bloom et al. on March 15, 1988.

The novel second lens, L2, of the present invention
35 does not require the use of a quadrupole lens formed by the
above-described G5 and G5' electrode and electrode portion,
52 and 54, respectively. A unitized G5 electrode, fabricated by



1 eliminating the first and second plate portions 88 and 96
 and attaching together the open ends of elements 52 and 54,
 may be used; however, such a gun structure would not
 provide an optimized deflected electron beam shape, although
 5 it might be useful where a tradeoff between performance and
 cost is permissible.

Specific dimensions of a computer modeled electron
 10 gun for the first preferred embodiment are presented in
 TABLE I.

TABLE I

		inches	mm
	K-G1 spacing	0.003	0.08
15	Thickness of G1 electrode 44	0.004	0.10
	Thickness of G2 electrode 46	0.028	0.71
	G1 and G2 aperture diameter	0.025	0.64
	G1 to G1 spacing	0.008	0.20
	G2 to G3 spacing	0.030	0.76
20	Thickness of G3 plate portion 68	0.010	0.25
	Diameter of G3 apertures 70	0.045	1.14
	Diameter of G3 apertures 78	0.148	3.76
	Length of G3 electrode 48	0.200	5.08
	G3 to G4 spacing	0.050	1.27
25	Thickness of active area of G4 electrode 50	0.025	0.64
	Diameter of G4 aperture 80	0.158	4.01
	Horizontal width of recesses 51a and 51b	0.785	19.94
	Vertical height of recesses 51a and 51b	0.239	6.07
	Depth of recesses 51a and 51b	0.030	0.76
30	G4 to G5 spacing	0.050	1.27
	Overall length of G5 electrode 52 and G5' electrode portion 54	0.970	24.64
	Spacing between plate portions 88 and 96	0.040	1.02
	Horizontal width of recess 92	0.755	19.18
35	Vertical height of recess 92	0.326	8.28
	Depth of recess 92	0.115	2.92
	Diameter of apertures 82, 90, 98	0.158	4.01



TABLE I Cont

		inches	mm
1	Aperture-to-aperture spacing K to G5 bottom	0.260	6.60
	Diameter of G5' aperture 94 (center)	0.160	4.06
5	Diameter of G5' apertures 94 (outer)	0.180	4.57
	G5' to G6 spacing	0.050	1.27
	Length of G6 electrode 56	0.150	3.81
	Horizontal width of opening 100	0.742	18.85
	Maximum height of opening 100	0.295	7.49
10	Minimum height of opening 100	0.289	7.34
	Depth of opening 100	0.135	3.43
	Diameter of G6 aperture 105 (center)	0.160	4.06
	Diameter of G6 apertures 105 (outer)	0.180	4.57
	Aperture-to-aperture spacing G5'top/G6	0.245	6.22
15	Length of G3 extrusions 79	0.045	1.14
	Length of G5 extrusions 83	0.045	1.14
	Length of G5' extrusions 95	0.034	0.86
	Length of G6 extrusions 105	0.045	1.14

20

In the embodiment presented in TABLE I, the electron gun is electrically connected as shown in Fig. 2.

Typically, the cathode operates at about 150V, the G1 electrode at ground potential, the G2 and G4 electrodes are electrically interconnected and operate within the range of about 300V to 1000V, the G3 and G5 electrodes also are electrically interconnected and operate at about 7650V, and the G6 electrode operates at an anode potential of about 25kV.

30

In the electron gun 26', the first lens, L1 (Fig. 2), provides a symmetrically-shaped, high quality electron beam into the second lens, L2. The first lens, L1, comprises the beam forming region of the gun and includes the G1 electrode 44, the G2 electrode 46, and the first portion of the G3 electrode 48 adjacent the G2 electrode.

35

The second lens, L2, is the novel asymmetric prefocusing lens and comprises the G4 electrode 50 and





1 the adjacent portions of the G3 electrode 48 and the G5
electrode 52. In the first embodiment, the identical pair
of recesses, 51a and 51b, are formed in the opposed, major,
active surfaces of the G4 electrode 50 (see, e.g., Figs. 5
5 and 6). While the recesses are preferably race-
track shaped, other shapes, e.g., rectangular, which
produce the effect described below, are within the
scope of the present invention. The active, facing
surfaces of the G3 and G5 electrodes, 48 and 52,
10 respectively, are substantially flat. The combination of
the above-described active elements produces quadrupole
fields which form the asymmetric or astigmatic prefocusing
lens which provides a horizontally-elongated electron beam
(not shown) into the third or main focusing lens, L3. By
15 providing the astigmatic focusing correction in the
prefocusing lens, L2, beyond the electron beam cross-over
point which occurs within the first lens, L1, the
effectiveness of each quadrupole field is substantially
independent of changes in the beam current. Additionally,
20 the race-track-shaped recesses, 51a and 51b, provide a
preconverging action which eliminates misconvergence of the
outer beams at the screen, due to changes in the focus
voltage, by providing a compensating change in the strength
of the prefocusing lens, L2.

25 While the invention is described in terms of two
recesses, it is possible to achieve the same results by
forming only one recess in either surface of the G4
electrode 50. The single recess would have a greater depth
than either of the recesses 51a or 51b, and the lateral
30 dimensions, i.e., vertical height and horizontal width,
would be less than those of either of the recesses, to provide
equivalent asymmetric and convergence corrections to the
beams. The dimensions of the single recess would depend
upon the extent of beam corrections required.

35 The main focusing lens, L3, formed between the G5'
electrode portion 54 and the G6 electrode 56, also is an
asymmetric lens, having low aberration, which provides a
vertically elongated, or asymmetrically-shaped, electron
beam spot at _____



1 the center of the screen. The spacing between adjacent
apertures 94 in the G5' electrode portion 54 and the
apertures 104 in the G6 electrode 56 is 6.22mm, rather than
the 6.60mm aperture-to-aperture spacing that exists from the
5 cathodes to the apertures 82 in the bottom G5 electrode 52.
This reduced main lens aperture-to-aperture spacing ensures
that the preconverged outer beams pass through low-aberration
regions of the main lens, L3, to minimize coma
distortions. A graph of a computer simulation of the
10 electron beam spot at the center of the screen of a
27V110⁰ tube, operated at a cathode drive voltage of
103.2V, a G3/G5 focus voltage of 7650V, an ultor
voltage of 25kV and 4mA beam current, is shown in Fig. 7.
The beam spot is elliptically-shaped along the vertical
15 axis to reduce the overfocusing action of the yoke when the
beam is deflected. The undeflected, center beam spot
includes a substantially rectangularly-shaped 90% peak beam
current density portion, which is circumscribed by larger
elliptically-shaped 50% and 5% peak beam current density
20 portions. The size of the 5% peak beam current density
spot is about 2.5mm x 4.2mm (HxV). With the width of the
G4 recesses 51a and 51b as specified in TABLE I, and the
overall length of the gun from the G3 bottom to the top of
the G5' electrode portion adjusted to 35.05mm, the focus
25 voltage is kept below 7700V, and the misconvergence of the
outer beam is reduced to substantially zero.

By utilizing the multipole lens described with
respect to Fig. 4, and applying to the G5' electrode portion
54 a dynamic differential focus voltage that ranges from the
30 potential on the G5 electrode 52, with no deflection, to
about 1000 volts more positive at maximum deflection, the
beam current density spot size can be optimized when the
beams are deflected to the periphery of the screen. This
mode of operation is discussed in U.S. Pat. No. 4,764,704,
35 issued to New et al. on Aug. 16, 1988.

A second embodiment of the present invention is
obtained by increasing the length of the G3 electrode 148

1 to 5.84mm, from the value of 5.08mm shown in TABLE I, and
modifying the asymmetric prefocusing lens, L2, as shown in
Fig. 10. In the second embodiment of the lens L2, the G4
electrode 150 comprises a substantially flat plate having a
5 thickness of about 0.025 inch (0.64mm), with circular
apertures 180 formed through the oppositely disposed,
active, major surfaces thereof. The active surfaces of the
facing G3 and G5 electrodes, 148 and 152, respectively,
have rectangular slots enclosing the electron beam apertures.
10 As shown in Fig. 11, each of the slots 149, in the G3
electrode 148, has a slot width, W, of 5.82mm, and a
slot height, H, of 10.16mm. Also, each of the slots 149 has a
depth, d, of 0.76mm, shown in Fig. 10. The slot-to-slot
spacing, S, shown in Fig. 11, is 7.11mm. Inasmuch as the
15 aperture-to-aperture spacing, s, within the prefocusing
lens, L2, is 6.60mm, and the slot-to-slot spacing, S, is
7.11mm, it can be seen, in Fig. 11, that the two outer slots
149 in the G3 electrode 148 are displaced outwardly
relative to the outer apertures 178 formed therein. This
20 displacement of the slots 149 in the G3 electrode, and a
similar displacement of the identically-dimensioned slots
153 in the G5 electrode 152, cooperate to form an
asymmetric prefocusing lens, L2, which provides a
horizontally-elongated electron beam (not shown) into the
25 third lens, L3. The novel slot configuration in the G3 and
G5 electrodes 148 and 152, respectively, also provides a
preconverging action to eliminate misconvergence of the
outer beams at the screen, in a manner similar to that
described for the first embodiment. A computer simulation
30 of the resultant vertically-elongated beam spot at the
center of the screen is graphically shown in Fig. 12. When
operated at an ultor voltage of 25kV and 4mA beam current
in a 27V110⁰ tube, the beam sizes at 90% and 50% peak
current density are comparable to those of the first
35 embodiment, shown in Fig. 7, and the beam size at 5% peak
current density is about 2.26mm x 3.68mm (HxV), at a
cathode drive voltage of 103.2V and a G3/G5 focus voltage
of 7650V. All other gun parameters are as listed in TABLE
I.



1 Equivalent performance can be achieved by forming
the slots in only one of the active surfaces, i.e., in
either the G3 electrode 148 or the G5 electrode 152. Slots
formed in only one active surface must be deeper than the
5 slots described above, and the small dimension of each slot
must be reduced, while the amount of outer slot offset must
be increased.

A third embodiment of the present invention is
achieved by modifying the electron gun to provide the
10 electrical configuration shown in Fig. 3. The asymmetric
prefocusing lens, L2, of the gun 26" is shown in Fig. 13.
The length of the G3 electrode 248 is maintained at 5.84mm,
the same dimension utilized in the second embodiment, and a
race-track-shaped recess 249 is formed in the active,
15 major surface of the G3 electrode facing the G4 electrode
250. The recess 249 has a horizontal width of 19.43mm, a
vertical height of 5.84mm and a depth of 0.76 mm. An
identically-shaped and dimensioned race-track recess 253
is formed in the active surface of the G5 electrode 252,
20 facing the substantially flat G4 electrode 250. While the
race-track shape is preferred, other geometric shapes
which provide an asymmetric lens with a preconvergence
correction may be used. In the third embodiment, the G4
electrode 250 has a thickness of about 0.64mm, with circular
25 apertures 280 formed therethrough. The asymmetric
prefocusing lens, L2, of the third embodiment provides the
preconverging action, and forms horizontally-elongated
electron beams (not shown), as previously described, into
the third lens, L3. A computer simulation of the resultant
30 vertically-elongated beam spot at the center of the screen
is graphically shown in Fig. 14. When operated at an
ultor/G4 voltage of 25kV and 4mA beam current in a
27V110⁰ tube, the beam size and shape at 90% peak beam
current density is larger and more elliptical than in the
35 first and second embodiments, while at 50% peak beam
current density the elliptically-shaped spot is more
vertically elongated than in the first two embodiments.



1 At 5% peak beam current density, the beam spot size is
about 1.94mm x 3.44mm (HxV). The cathode drive voltage in
this embodiment is 103.2V, the G3/G5 focus voltage is 7650V
and the G2 voltage is typically about 400V. All other gun
5 parameters are as listed in TABLE I.

As described above, a single recess can be formed in
either the active surface of the G3 or G5 electrodes, 248
or 252, respectively, if the depth is increased and the
lateral dimensions are suitably reduced to provide
10 equivalent performance.

A fourth embodiment of the asymmetric prefocusing
lens, L2, is shown in Fig. 15. The length of the G3
electrode 348 is 5.08mm, and the active surface facing the
G4 electrode 350 is substantially flat, with three circular
15 apertures 378 formed therethrough. The apertures 378 have
a diameter of 4.01mm. The G4 electrode 350 has rectangular
slots 350a and 350b formed in the opposed major active
surfaces thereof, with the slots 350a facing the G3
electrode 348 and the slots 350b facing the G5 electrode
20 352. Each of the slots 350a and 350b has a width of
5.79mm, a height of 10.16mm and a depth of 0.76mm. The
slot-to-slot spacing is 7.01mm. The circular apertures
380, formed through the G4 electrode 350, have a diameter
of 4.01mm and are enclosed within the rectangular slots
25 350a and 350b, in the same manner as discussed with respect
to the slots shown in Fig. 11. The active major surface of
the G5 electrode 352 facing the G4 electrode 350 also is
substantially flat, with three circular apertures 382
formed therethrough. The apertures 382 also have a
30 diameter of 4.01mm.

Inasmuch as the aperture-to-aperture spacing within the
prefocusing lens, L2, is 6.60mm and the slot-to-slot
spacing of the slots 350a and 350b of the G4 electrode 350
is 7.01mm, the two outer slots are displaced outwardly
35 relative to the outer apertures 380 formed within the
slots. The configuration and displacement of the G4 slots
form an asymmetric lens which provides the preconverging
action and horizontally-elongated electron beams (not



1 shown), as previously described, into the third lens, L3.
A computer simulation of the resultant vertically-elongated
beam spot at the center of the screen is graphically shown
in Fig. 16. The beam spot shape is similar to that shown
5 in Fig. 14. When operated at an ultor/G4 voltage of 25kV
and 4mA beam current in a 27V110⁰ tube, the beam size at
5% peak beam current density is about 1.96mm x 3.49mm
(HxV), at a cathode drive voltage of 103.2V and a G3/G5
focus voltage of 7700V. The G2 voltage in this embodiment
10 is typically about 400V. All other gun parameters are as
listed in TABLE I.

Alternatively, slots can be formed in only one of
the active surfaces of the G4 electrode 350. The depth of
the slots must be increased, and the small dimension of each
15 slot must be decreased, from the respective dimensions
described immediately above. Additionally, the amount of
offset of the outer slots must be increased to obtain
performance equivalent to that of the fourth embodiment.

20 The novel electron gun of the present invention is
to be contrasted to an electron gun of the type described
in U.S. Pat. No. 4,764,704, referenced above. In that
patent, a G4 electrode, similar to the G4 electrode 450 of
25 the prefocusing, or second, lens shown in Fig. 17 herein,
has rectangularly-shaped
apertures 480 therethrough. Specific dimensions of a
computer model of an embodiment of that prior electron gun
are presented in TABLE II. That embodiment has the electrical
30 configuration shown in Fig. 2 herein, and is similar in
construction to the electron gun shown in Fig. 4 herein,
with similar gun elements being identified with corresponding
numbers, prefixed by the number "4".

35

This Sheet Has Been Replaced



TABLE II

		inches	mm
1	K-G1 spacing	0.003	0.08
	Thickness of G1 electrode 444	0.004	0.10
5	Thickness of G2 electrode 446	0.028	0.71
	G1 and G1 aperture diameters	0.025	0.64
	G1 to G2 spacing	0.008	0.20
	G2 to G3 spacing	0.030	0.76
	Thickness of G3 bottom plate 468	0.010	0.25
10	Diameter of G3 aperture 470, center	0.045	1.14
	Diameter of G3 apertures 470, outer	0.052	1.32
	Diameter of G3 apertures 478	0.148	3.76
	Length of G3 electrode 448	0.200	5.08
	G3 to G4 spacing	0.500	1.27
15	Thickness of G4 electrode 450	0.025	0.64
	Dimensions of G4 electrode apertures 480	0.158V X	4.01V X
		0.172H	4.37H
	G4 to G5 spacing	0.050	1.27
	Length of G5 electrode * 452-454	0.830	21.08
20	Diameter of apertures 482	0.158	4.01
	Diameter of aperture 494 (center)	0.160	4.06
	Diameter of apertures 494 (outer)	0.180	4.57
	Horizontal width of recess 492	0.755	19.18
	Vertical height of recess 492	0.326	8.28
25	Depth of recess 492	0.115	2.29
	Aperture-to-aperture spacing K to G5 bottom **	0.260	6.60
	G5 to G6 spacing	0.050	1.27
	Length of G6 electrode	0.150	3.81
30	Horizontal width of opening 400	0.742	18.85
	Maximum height of opening 400	0.295	7.49
	Minimum height of opening 400	0.289	7.34
	Depth of opening 400	0.135	3.43
	Diameter of aperture 404 (center)	0.160	4.06
35	Diameter of apertures 404 (outer)	0.180	4.57
	Aperture-to-aperture spacing G5 top/G6	0.245	6.22
	Length of G3 extrusions 479	0.045	1.14
	Length of G5 extrusions 483	0.045	1.14



1

TABLE II Cont

		inches	mm
	Length of G5 extrusions 495	0.034	0.86
5	Length of G6 extrusions 405	0.045	1.14
	* unitized electrode, no multipole lens		
	** the aperture-to-aperture spacing of the G3 bottom apertures 470 is increased to 0.2635 inch (6.69mm) to eliminate any displacement of the outer electron beams		
10	with changes in the focus voltage.		

In the prior electron gun described in TABLE II, the cathode operates at a drive voltage of about 103.2V, the G1 electrode is at ground potential, the G2 and G4 are electrically interconnected and operate within the range of 300V to 1000V, the G3 and G5 electrodes also are interconnected and operate at about 6600V, and the G6 electrode operates at an anode potential of about 25kV. The prefocusing lens, L2, of the prior electron gun, with the rectangular apertures 480 formed through the substantially flat G4 electrode 450, provides a horizontally-elongated electron beam (not shown) into the main focusing lens, L3. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 18. The beam size at 5% peak current density is about 2.30mm x 3.49mm (HxV) at the previously described operating parameters.

CONCLUSION

The performance of the present prefocusing lens, L2, of embodiments 1 through 4, as measured by the resultant electron beam spot size on the screen, is comparable to that of the prior electron gun described in U.S. Pat. No. 4,764,704, which utilizes a prefocusing lens having rectangularly-shaped apertures in the G4 electrode thereof. A comparison of results is contained in TABLE III.



1

TABLE III

<u>EMBODIMENT</u>		<u>Beam Spot Size on Screen</u>	
		<u>Horizontal (mm)</u>	<u>Vertical (mm)</u>
5	1	2.50	4.20
	2	2.26	3.68
	3	1.94	3.44
	4	1.96	3.49
	Prior	2.30	3.49


10

The four embodiments of the present electron gun structure provide ease of manufacturing, because the use of circular apertures throughout the electron gun reduce the misalignment problems posed by the rectangularly-shaped G4 apertures of the prior gun. Additionally, the prior gun requires a slight increase in the G3 aperture-to-aperture spacing (from 6.60mm to 6.69mm) to eliminate the misconvergence of the outer electron beams with changes in focus voltage. The present invention achieves comparable performance by controlling either the horizontal width of the race-track-shaped recesses within the prefocusing lens, L2, in embodiments 1 and 3, or the slot-to-slot spacing of the rectangular slots formed within prefocusing lens, L2, in embodiments 2 and 4. In each of the four embodiments, the aperture-to-aperture spacing from the cathode 42 to the bottom of the G5 electrode 52 is maintained at a constant value of 6.60mm, thereby simplifying the assembly and alignment of the gun components.

30

35



CLAIMS

5


1. A color cathode-ray tube including an envelope having therein an inline electron gun for generating and directing
5 three inline electron beams along initially coplanar beam paths toward a screen on an interior portion of said envelope, said gun including a plurality of electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens, characterized by said prefocusing lens (L2) includes four active surfaces, at least
10 one of which has asymmetric prefocusing means (51a,51b; 149,153;249,253;350a,350b) formed therein.

2. The tube as described in claim 1, characterized in that at least two of said four active surfaces have substantially
15 identical, asymmetric prefocusing means (51a,51b;149,153; 249,253,350a,350b) formed therein.

3. The tube as described in claim 1 or 2, characterized in that three circular apertures (80;178,182;278,282;380) are
20 formed within said asymmetric prefocusing means (51a,51b; 149,153;249,253;350a,350b).

4. The tube as described in claim 2 or 3, wherein said beam-forming region includes a first electrode, a second electrode
25 and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing
30 lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens, characterized in that said fourth electrode (50;350) has substantially identical asymmetric beam-focusing recesses (51a,51b;350a,350b) formed in the oppositely disposed active
35 surfaces thereof.





5. The tube as described in claim 4, characterized in that a single recess (51a,51b) is formed in each active surface of said fourth electrode (50).

5 6. The tube as described in claim 4, characterized in that three separate, substantially rectangular recesses (350a,350b) comprising two outer recesses and a center recess are formed in each active surface of said fourth electrode (350).

10 7. The tube as described in claim 6, characterized in that each of said outer recesses (350a,350b) has an outer aperture (380) therethrough and is displaced outwardly relative to said outer aperture.

15 8. The tube as described in claim 2 or 3, wherein said beam-forming region includes a first electrode, a second electrode and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third
20 electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens, characterized in that said second portion of said third
25 electrode (148;248) and said first portion of said fifth electrode (152;252) have substantially identical, asymmetric beam-focusing recesses (149,153;249,253) formed in the active surfaces thereof.

30 9. The tube as described in claim 8, characterized in that a single recess (249,253) is formed in each of said second portion of said third electrode (248) and said first portion of said fifth electrode (252).

35 10. The tube as described in claim 9, characterized in that three separate, substantially rectangular recesses (149,153), comprising two outer recesses and a center recess, are formed in said active surfaces of said second portion of said third electrode (148) and of said first portion of said fifth electrode (152).



11. The tube as described in claim 10, characterized in
that each of said outer recesses (149,153) has a circular aperture
(178,182) therethrough, said outer recesses being displaced
5 outwardly relative to the outer circular apertures.

This Sheet Has Been Replaced



* C L M S *

6

ABSTRACT




An improved color picture tube includes an inline electron gun (26) for generating and directing three inline electron beams (28) along coplanar beam paths toward a screen (22). The gun includes a plurality of electrodes (44,46, 48,50,52,56) which form a beam-forming region (L1), a prefocusing lens (L2), and a main focusing lens (L3) for the electron beams. The improvement resides within the prefocusing lens, which includes four active surfaces. At least one of the active surfaces has asymmetric prefocusing recesses formed therein. (Figure 4)

This Sheet Has Been Replaced



7

1/8

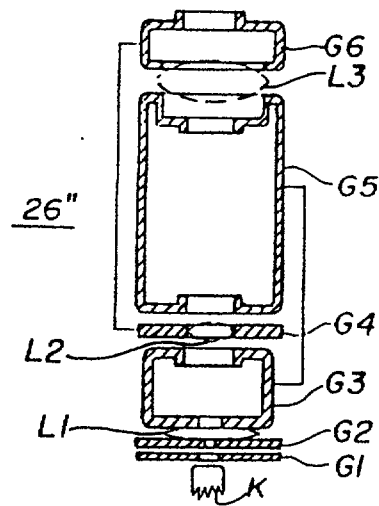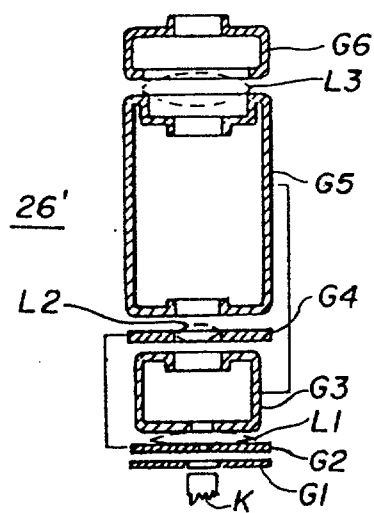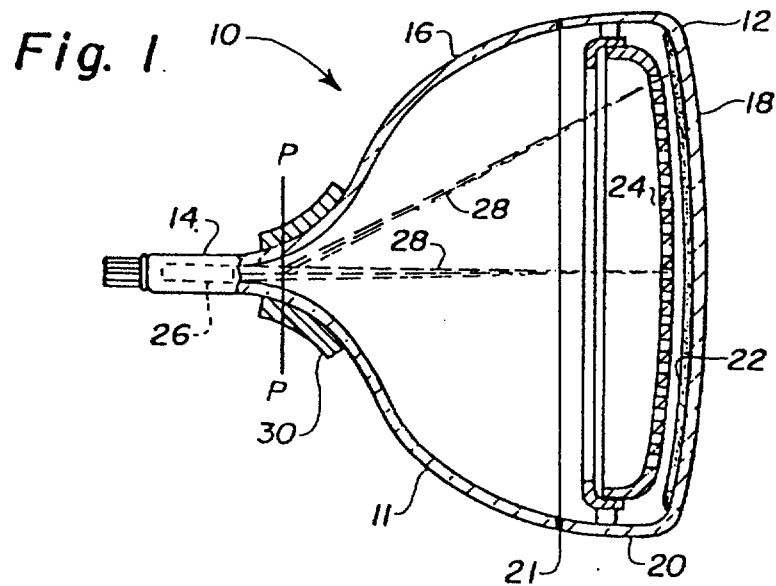

This Sheet Has Been Replaced






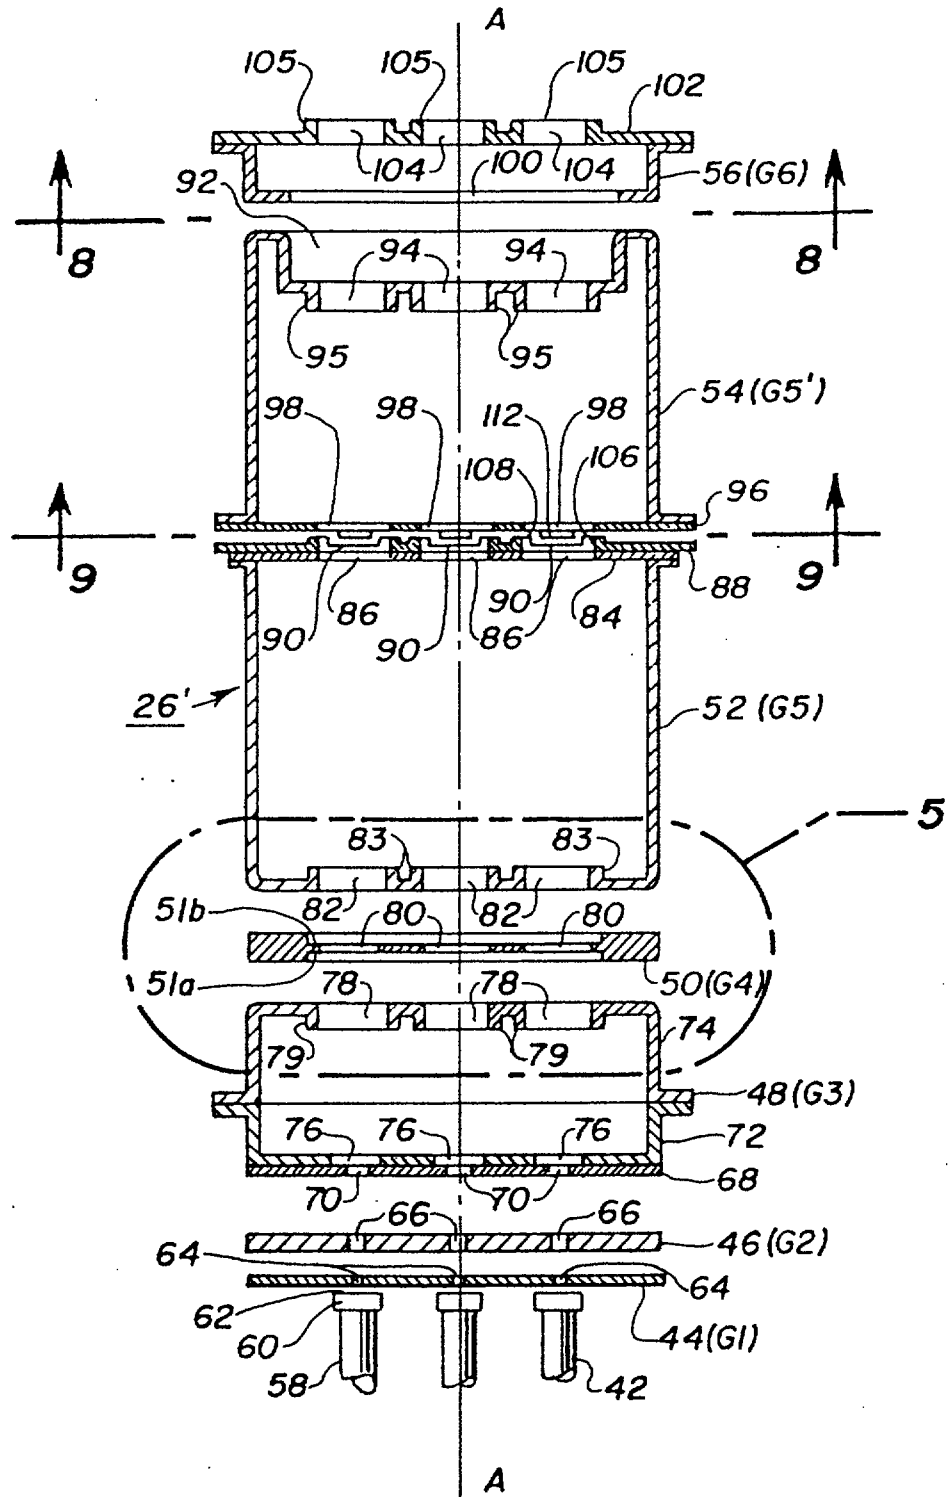


Fig. 4

This Sheet Has Been Replaced

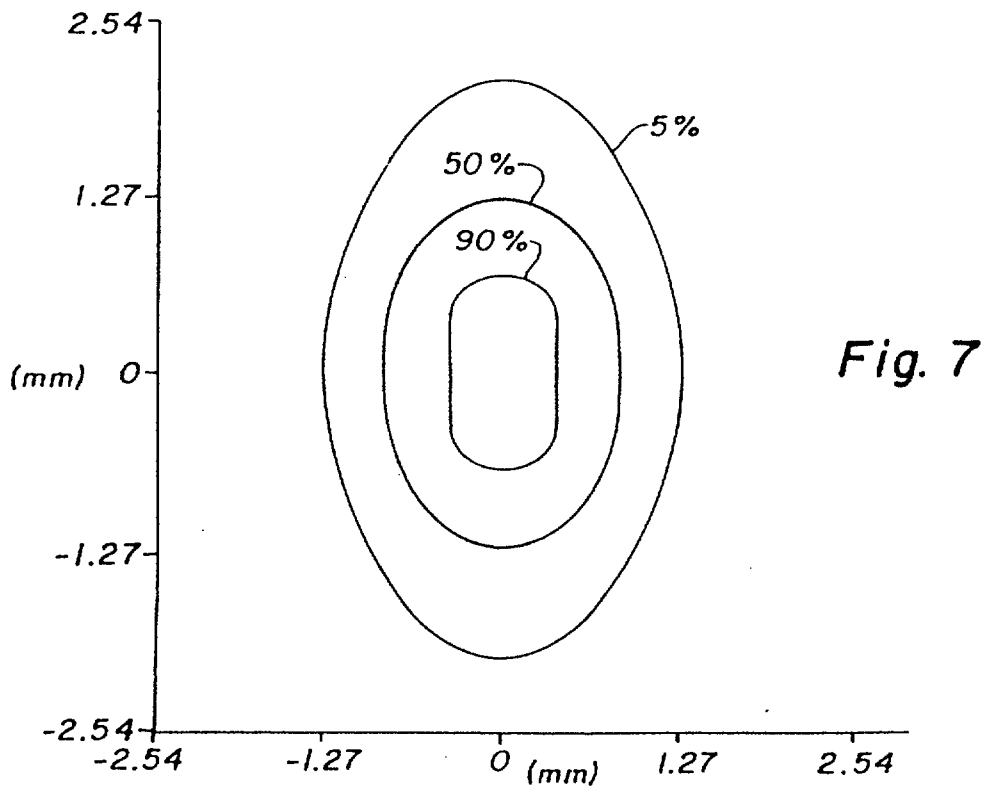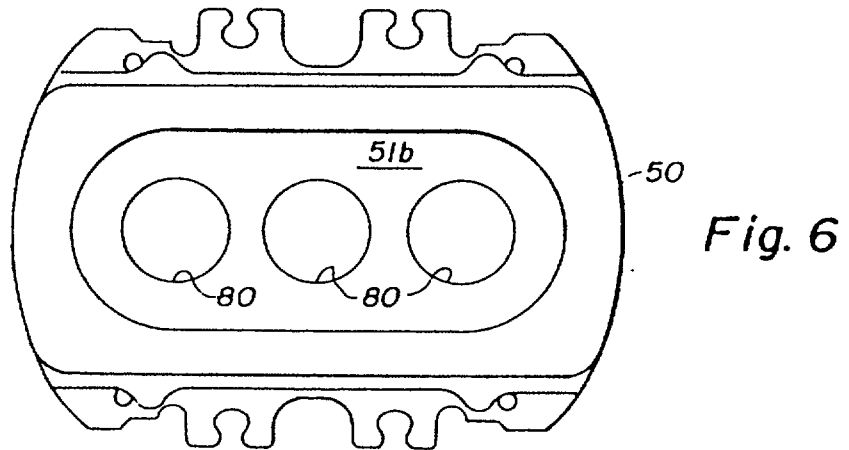

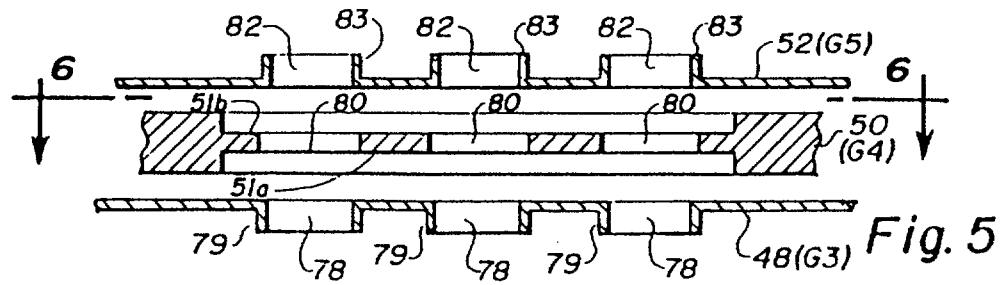

This Sheet Has Been Replaced



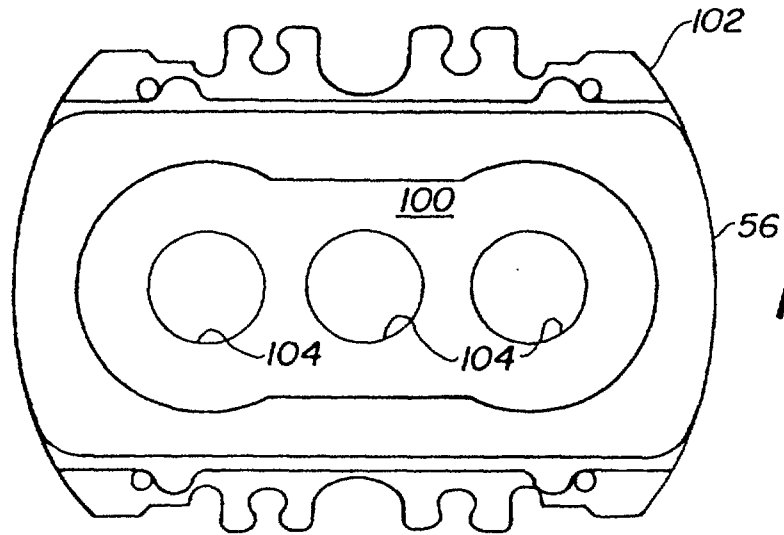


Fig. 8

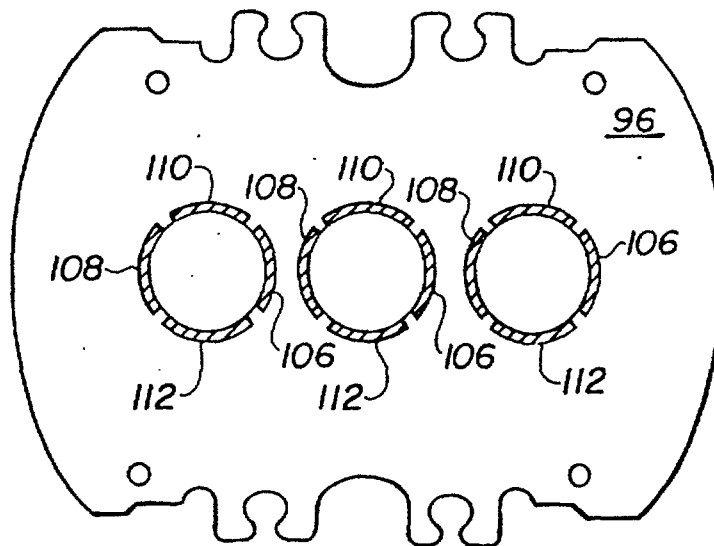
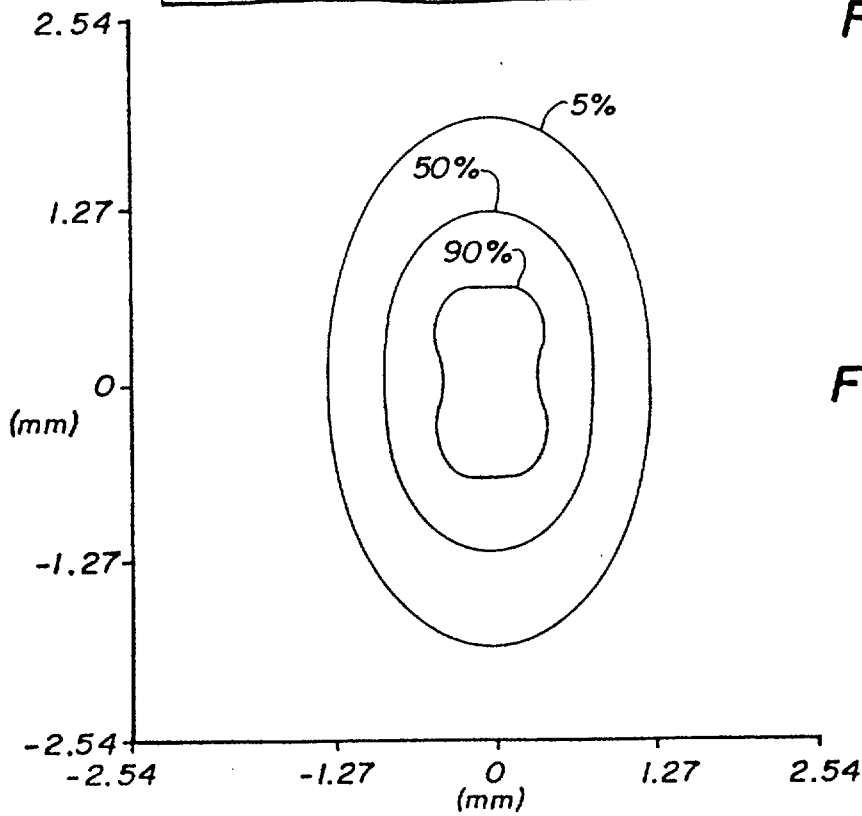
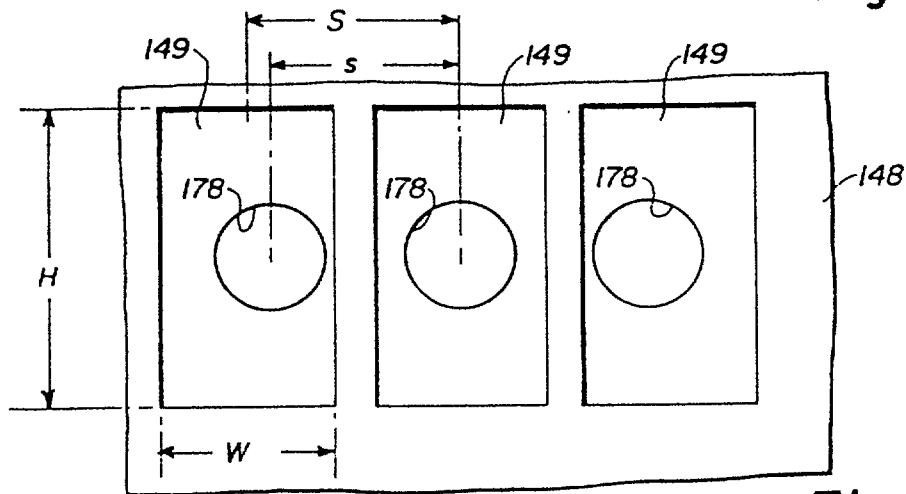
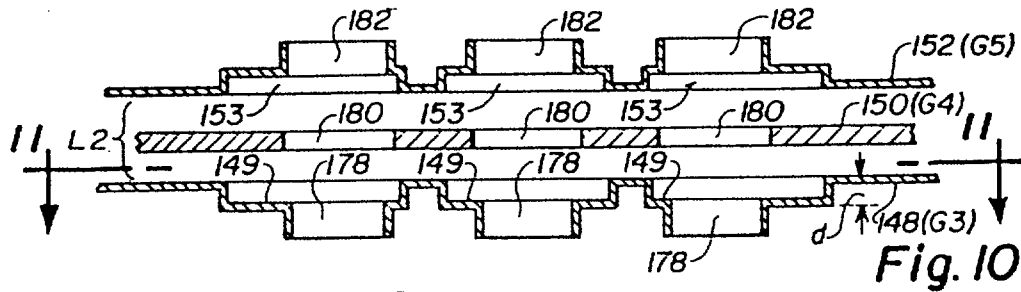


Fig. 9





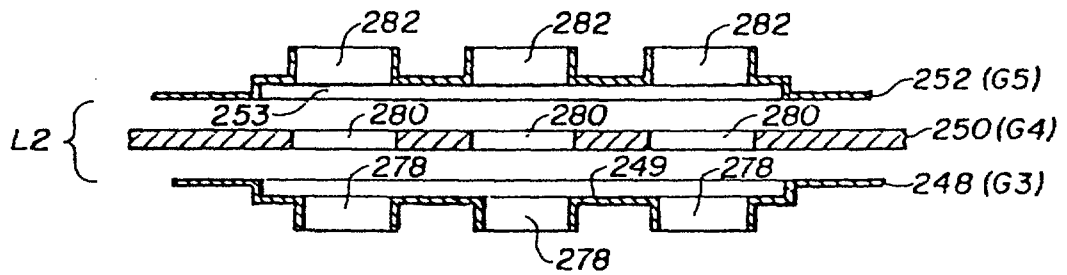


Fig. 13

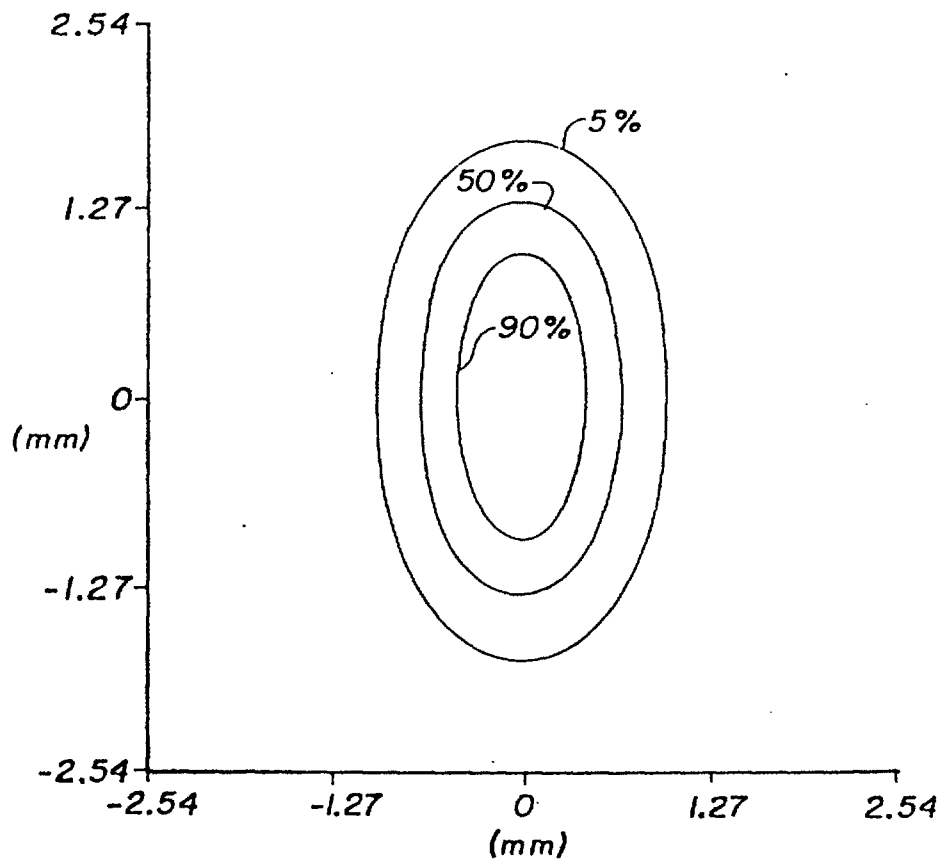


Fig. 14



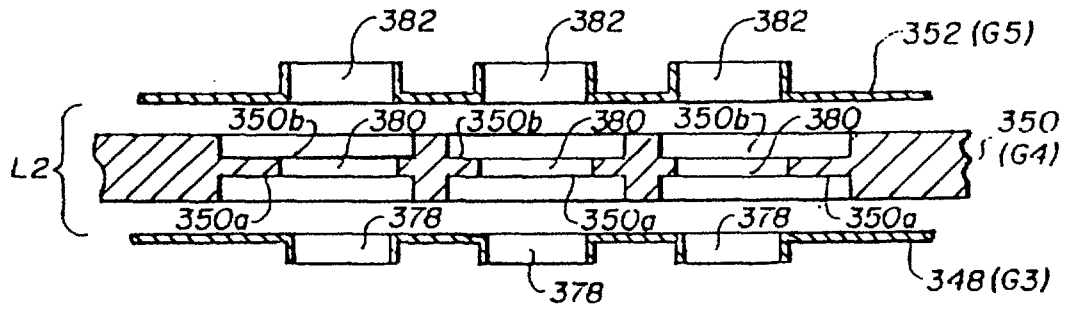


Fig. 15

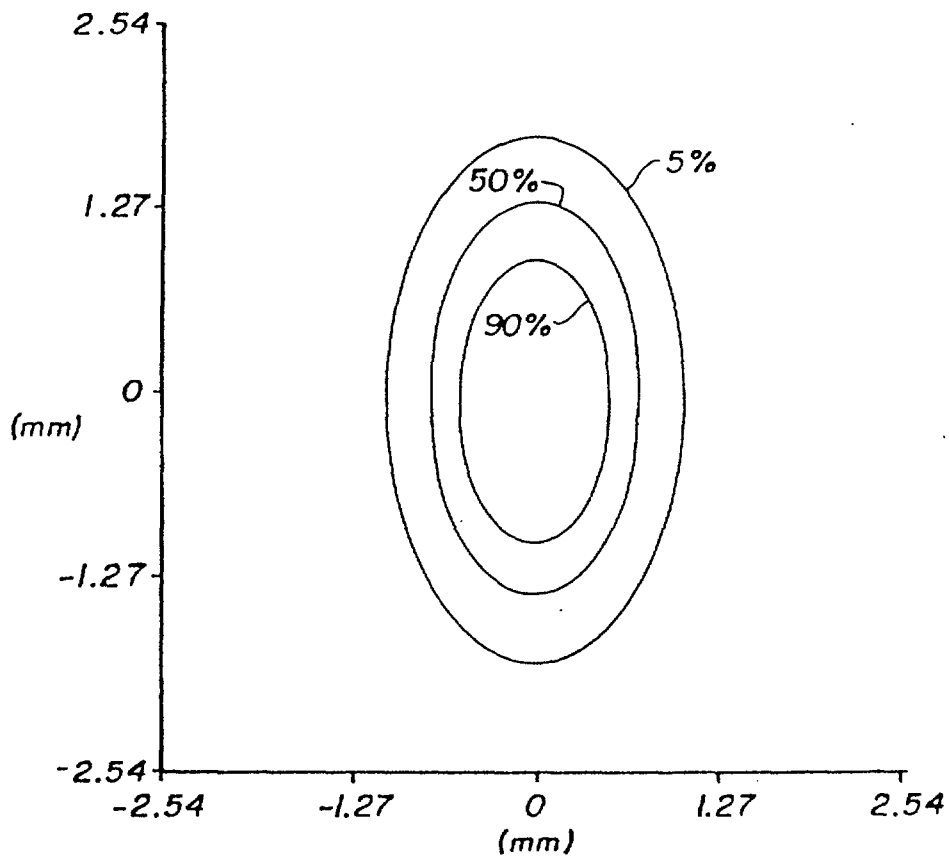


Fig. 16

This Sheet Has Been Replaced



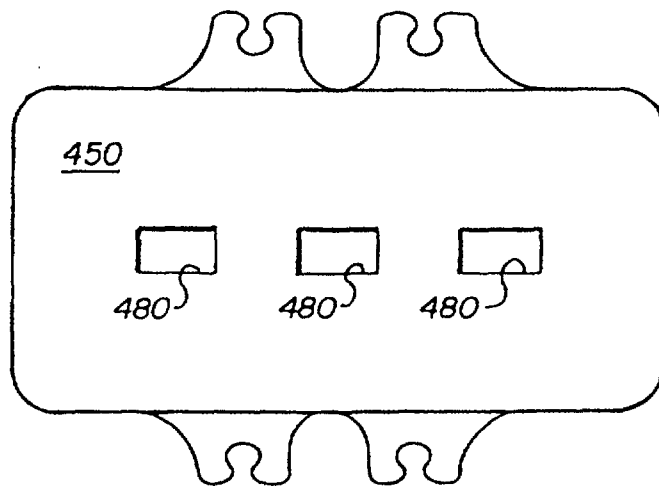


Fig. 17
PRIOR
ART

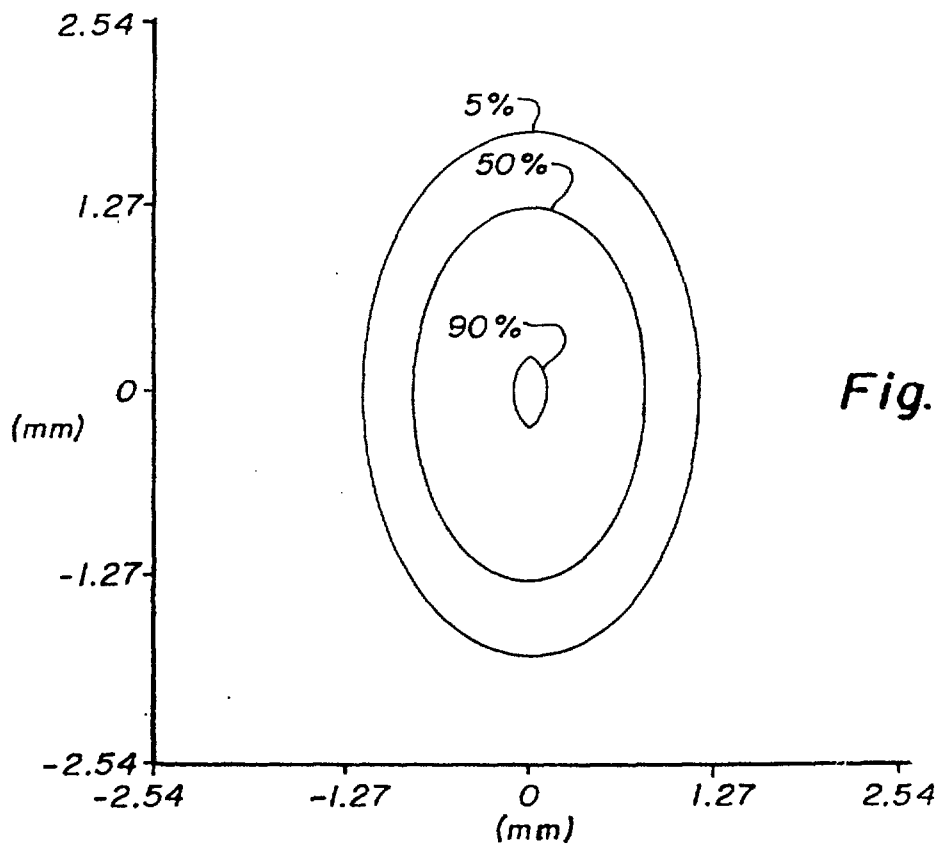


Fig. 18



This Sheet Has Been Replaced



COLOR PICTURE TUBE HAVING AN INLINE ELECTRON GUN
WITH AN ASTIGMATIC PREFOCUSING LENS

5

This invention relates to a color picture tube having an inline electron gun and, particularly, to an electron gun having three lenses including an asymmetric prefocusing lens.

10

An electron gun, such as a six electrode gun, designed for use in a large screen entertainment-type color picture tube must be capable of generating small-sized high-current electron beam spots over the entire screen. A conventional television receiver utilizes a color picture tube with an inline electron gun and a self-converging deflection yoke, for providing a horizontal deflection field having a pincushion-shaped distortion and a vertical deflection field having a barrel-shaped distortion. The fringe fields of such a yoke introduce into the tube strong astigmatism and deflection defocusing caused, primarily, by vertical overfocusing and, secondarily, by horizontal underfocusing of the deflected electron beams. Beam spots formed by the electron beams passing through such distorted horizontal and vertical deflection fields are asymmetrically-shaped when deflected to the periphery of the screen. Additionally, many inline electron guns exhibit a misconvergence of the outer electron beams due to a change in the strength of the electron lens caused by changes in the focus voltage. Such a misconvergence results in a variation in beam landing position with changes in focus voltage. The present invention addresses these problems in an expeditious and cost effective manner without sacrificing performance.

REPLACED SHEETS	
☒	Description : page 1 to page 16
☒	Fig. 1 : page 17 to page 21
☒	Fig. 2 : page 22 to page 23
☒	Fig. 3 : page 24 to page 25
☒	Fig. 4 : page 26 to page 27
☒	Fig. 5 : page 28 to page 29
☒	Fig. 6 : page 30 to page 31
☒	Fig. 7 : page 32 to page 33
☒	Fig. 8 : page 34 to page 35
☒	Fig. 9 : page 36 to page 37
☒	Fig. 10 : page 38 to page 39
☒	Fig. 11 : page 40 to page 41
☒	Fig. 12 : page 42 to page 43
☒	Fig. 13 : page 44 to page 45
☒	Fig. 14 : page 46 to page 47
☒	Fig. 15 : page 48 to page 49
☒	Fig. 16 : page 50 to page 51
☒	Fig. 17 : page 52 to page 53
☒	Fig. 18 : page 54 to page 55
☒	Fig. 19 : page 56 to page 57
☒	Fig. 20 : page 58 to page 59
☒	Fig. 21 : page 60 to page 61
☒	Fig. 22 : page 62 to page 63
☒	Fig. 23 : page 64 to page 65
☒	Fig. 24 : page 66 to page 67
☒	Fig. 25 : page 68 to page 69
☒	Fig. 26 : page 70 to page 71
☒	Fig. 27 : page 72 to page 73
☒	Fig. 28 : page 74 to page 75
☒	Fig. 29 : page 76 to page 77
☒	Fig. 30 : page 78 to page 79
☒	Fig. 31 : page 80 to page 81
☒	Fig. 32 : page 82 to page 83
☒	Fig. 33 : page 84 to page 85
☒	Fig. 34 : page 86 to page 87
☒	Fig. 35 : page 88 to page 89
☒	Fig. 36 : page 90 to page 91
☒	Fig. 37 : page 92 to page 93
☒	Fig. 38 : page 94 to page 95
☒	Fig. 39 : page 96 to page 97
☒	Fig. 40 : page 98 to page 99
☒	Fig. 41 : page 100 to page 101
☒	Fig. 42 : page 102 to page 103
☒	Fig. 43 : page 104 to page 105
☒	Fig. 44 : page 106 to page 107
☒	Fig. 45 : page 108 to page 109
☒	Fig. 46 : page 110 to page 111
☒	Fig. 47 : page 112 to page 113
☒	Fig. 48 : page 114 to page 115
☒	Fig. 49 : page 116 to page 117
☒	Fig. 50 : page 118 to page 119
☒	Fig. 51 : page 120 to page 121
☒	Fig. 52 : page 122 to page 123
☒	Fig. 53 : page 124 to page 125
☒	Fig. 54 : page 126 to page 127
☒	Fig. 55 : page 128 to page 129
☒	Fig. 56 : page 130 to page 131
☒	Fig. 57 : page 132 to page 133
☒	Fig. 58 : page 134 to page 135
☒	Fig. 59 : page 136 to page 137
☒	Fig. 60 : page 138 to page 139
☒	Fig. 61 : page 140 to page 141
☒	Fig. 62 : page 142 to page 143
☒	Fig. 63 : page 144 to page 145
☒	Fig. 64 : page 146 to page 147
☒	Fig. 65 : page 148 to page 149
☒	Fig. 66 : page 150 to page 151
☒	Fig. 67 : page 152 to page 153
☒	Fig. 68 : page 154 to page 155
☒	Fig. 69 : page 156 to page 157
☒	Fig. 70 : page 158 to page 159
☒	Fig. 71 : page 160 to page 161
☒	Fig. 72 : page 162 to page 163
☒	Fig. 73 : page 164 to page 165
☒	Fig. 74 : page 166 to page 167
☒	Fig. 75 : page 168 to page 169
☒	Fig. 76 : page 170 to page 171
☒	Fig. 77 : page 172 to page 173
☒	Fig. 78 : page 174 to page 175
☒	Fig. 79 : page 176 to page 177
☒	Fig. 80 : page 178 to page 179
☒	Fig. 81 : page 180 to page 181
☒	Fig. 82 : page 182 to page 183
☒	Fig. 83 : page 184 to page 185
☒	Fig. 84 : page 186 to page 187
☒	Fig. 85 : page 188 to page 189
☒	Fig. 86 : page 190 to page 191
☒	Fig. 87 : page 192 to page 193
☒	Fig. 88 : page 194 to page 195
☒	Fig. 89 : page 196 to page 197
☒	Fig. 90 : page 198 to page 199
☒	Fig. 91 : page 200 to page 201
☒	Fig. 92 : page 202 to page 203
☒	Fig. 93 : page 204 to page 205
☒	Fig. 94 : page 206 to page 207
☒	Fig. 95 : page 208 to page 209
☒	Fig. 96 : page 210 to page 211
☒	Fig. 97 : page 212 to page 213
☒	Fig. 98 : page 214 to page 215
☒	Fig. 99 : page 216 to page 217
☒	Fig. 100 : page 218 to page 219
☒	Fig. 101 : page 220 to page 221
☒	Fig. 102 : page 222 to page 223
☒	Fig. 103 : page 224 to page 225
☒	Fig. 104 : page 226 to page 227
☒	Fig. 105 : page 228 to page 229
☒	Fig. 106 : page 230 to page 231
☒	Fig. 107 : page 232 to page 233
☒	Fig. 108 : page 234 to page 235
☒	Fig. 109 : page 236 to page 237
☒	Fig. 110 : page 238 to page 239
☒	Fig. 111 : page 240 to page 241
☒	Fig. 112 : page 242 to page 243
☒	Fig. 113 : page 244 to page 245
☒	Fig. 114 : page 246 to page 247
☒	Fig. 115 : page 248 to page 249
☒	Fig. 116 : page 250 to page 251
☒	Fig. 117 : page 252 to page 253
☒	Fig. 118 : page 254 to page 255
☒	Fig. 119 : page 256 to page 257
☒	Fig. 120 : page 258 to page 259
☒	Fig. 121 : page 260 to page 261
☒	Fig. 122 : page 262 to page 263
☒	Fig. 123 : page 264 to page 265
☒	Fig. 124 : page 266 to page 267
☒	Fig. 125 : page 268 to page 269
☒	Fig. 126 : page 270 to page 271
☒	Fig. 127 : page 272 to page 273
☒	Fig. 128 : page 274 to page 275
☒	Fig. 129 : page 276 to page 277
☒	Fig. 130 : page 278 to page 279
☒	Fig. 131 : page 280 to page 281
☒	Fig. 132 : page 282 to page 283
☒	Fig. 133 : page 284 to page 285
☒	Fig. 134 : page 286 to page 287
☒	Fig. 135 : page 288 to page 289
☒	Fig. 136 : page 290 to page 291
☒	Fig. 137 : page 292 to page 293
☒	Fig. 138 : page 294 to page 295
☒	Fig. 139 : page 296 to page 297
☒	Fig. 140 : page 298 to page 299
☒	Fig. 141 : page 300 to page 301
☒	Fig. 142 : page 302 to page 303
☒	Fig. 143 : page 304 to page 305
☒	Fig. 144 : page 306 to page 307
☒	Fig. 145 : page 308 to page 309
☒	Fig. 146 : page 310 to page 311
☒	Fig. 147 : page 312 to page 313
☒	Fig. 148 : page 314 to page 315
☒	Fig. 149 : page 316 to page 317
☒	Fig. 150 : page 318 to page 319
☒	Fig. 151 : page 320 to page 321
☒	Fig. 152 : page 322 to page 323
☒	Fig. 153 : page 324 to page 325
☒	Fig. 154 : page 326 to page 327
☒	Fig. 155 : page 328 to page 329
☒	Fig. 156 : page 330 to page 331
☒	Fig. 157 : page 332 to page 333
☒	Fig. 158 : page 334 to page 335
☒	Fig. 159 : page 336 to page 337
☒	Fig. 160 : page 338 to page 339
☒	Fig. 161 : page 340 to page 341
☒	Fig. 162 : page 342 to page 343
☒	Fig. 163 : page 344 to page 345
☒	Fig. 164 : page 346 to page 347
☒	Fig. 165 : page 348 to page 349
☒	Fig. 166 : page 350 to page 351
☒	Fig. 167 : page 352 to page 353
☒	Fig. 168 : page 354 to page 355
☒	Fig. 169 : page 356 to page 357
☒	Fig. 170 : page 358 to page 359
☒	Fig. 171 : page 360 to page 361
☒	Fig. 172 : page 362 to page 363
☒	Fig. 173 : page 364 to page 365
☒	Fig. 174 : page 366 to page 367
☒	Fig. 175 : page 368 to page 369
☒	Fig. 176 : page 370 to page 371
☒	Fig. 177 : page 372 to page 373
☒	Fig. 178 : page 374 to page 375
☒	Fig. 179 : page 376 to page 377
☒	Fig. 180 : page 378 to page 379
☒	Fig. 181 : page 380 to page 381
☒	Fig. 182 : page 382 to page 383
☒	Fig. 183 : page 384 to page 385
☒	Fig. 184 : page 386 to page 387
☒	Fig. 185 : page 388 to page 389
☒	Fig. 186 : page 390 to page 391
☒	Fig. 187 : page 392 to page 393
☒	Fig. 188 : page 394 to page 395
☒	Fig. 189 : page 396 to page 397
☒	Fig. 190 : page 398 to page 399
☒	Fig. 191 : page 400 to page 401
☒	Fig. 192 : page 402 to page 403
☒	Fig. 193 : page 404 to page 405
☒	Fig. 194 : page 406 to page 407
☒	Fig. 195 : page 408 to page 409
☒	Fig. 196 : page 410 to page 411
☒	Fig. 197 : page 412 to page 413
☒	Fig. 198 : page 414 to page 415
☒	Fig. 199 : page 416 to page 417
☒	Fig. 200 : page 418 to page 419
☒	Fig. 201 : page 420 to page 421
☒	Fig. 202 : page 422 to page 423
☒	Fig. 203 : page 424 to page 425
☒	Fig. 204 : page 426 to page 427
☒	Fig. 205 : page 428 to page 429
☒	Fig. 206 : page 430 to page 431
☒	Fig. 207 : page 432 to page 433
☒	Fig. 208 : page 434 to page 435
☒	Fig. 209 : page 436 to page 437
☒	Fig. 210 : page 438 to page 439
☒	Fig. 211 : page 440 to page 441
☒	Fig. 212 : page 442 to page 443
☒	Fig. 213 : page 444 to page 445
☒	Fig. 214 : page 446 to page 447
☒	Fig. 215 : page 448 to page 449
☒	Fig. 216 : page 450 to page 451
☒	Fig. 217 : page 452 to page 453
☒	Fig. 218 : page 454 to page 455
☒	Fig. 219 : page 456 to page 457
☒	Fig. 220 : page 458 to page 459
☒	Fig. 221 : page 460 to page 461
☒	Fig. 222 : page 462 to page 463
☒	Fig. 223 : page 464 to page 465
☒	Fig. 224 : page 466 to page 467
☒	Fig. 225 : page 468 to page 469
☒	Fig. 226 : page 470 to page 471
☒	Fig. 227 : page 472 to page 473
☒	Fig. 228 : page 474 to page 475
☒	Fig. 229 : page 476 to page 477
☒	Fig. 230 : page 478 to page 479
☒	Fig. 231 : page 480 to page 481
☒	Fig. 232 : page 482 to page 483
☒	Fig. 233 : page 484 to page 485
☒	Fig. 234 : page 486 to page 487
☒	Fig. 235 : page 488 to page 489
☒	Fig. 236 : page 490 to page 491
☒	Fig. 237 : page 492 to page 493
☒	Fig. 238 : page 494 to page 495
☒	Fig. 239 : page 496 to page 497
☒	Fig. 240 : page 498 to page 499
☒	Fig. 241 : page 500 to page 501
☒	Fig. 242 : page 502 to page 503
☒	Fig. 243 : page 504 to page 505
☒	Fig. 244 : page 506 to page 507
☒	Fig. 245 : page 508 to page 509
☒	Fig. 246 : page 510 to page 511
☒	Fig. 247 : page 512 to page 513
☒	Fig. 248 : page 514 to page 515
☒	Fig. 249 : page 516 to page 517
☒	Fig. 250 : page 518 to page 519
☒	Fig. 251 : page 520 to page 521
☒	Fig. 252 : page 522 to page 523
☒	Fig. 253 : page 524 to page 525
☒	Fig. 254 : page 526 to page 527
☒	Fig. 255 : page 528 to page 529
☒	Fig. 256 : page 530 to page 531
☒	Fig. 257 : page 532 to page 533
☒	Fig. 258 : page 534 to page 535
☒	Fig. 259 : page 536 to page 537
☒	Fig. 260 : page 538 to page 539
☒	Fig. 261 : page 540 to page 541
☒	Fig. 262 : page 542 to page 543
☒	Fig. 263 : page 544 to page 545
☒	Fig. 264 : page 546 to page 547
☒	Fig. 265 : page 548 to page 549
☒	Fig. 266 : page 550 to page 551
☒	Fig. 267 : page 552 to page 553
☒	Fig. 268 : page 554 to page 555
☒	Fig. 269 : page 556 to page 557
☒	Fig. 270 : page 558 to page 559
☒	Fig. 271 : page 560 to page 561
☒	Fig. 272 : page 562 to page 563
☒	Fig. 273 : page 564 to page 565
☒	Fig. 274 : page 566 to page 567
☒	Fig. 275 : page 568 to page 569
☒	Fig. 276 : page 570 to page 571



1

The present invention provides an improvement in a color picture tube having an inline electron gun for generating and directing three inline electron beams along coplanar beam paths toward a screen. The gun includes a plurality of electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens for the electron beams. The improvement resides within the prefocusing lens, which includes four active surfaces. At least one of the active surfaces has asymmetric prefocusing means formed therein.

In the drawings:

Fig. 1 is a plan view, partially in axial section, of a shadow mask color picture tube embodying the invention.

Figs. 2 and 3 are schematic axial section side views of electron guns with which the invention may be employed.

Fig. 4 is an axial section top view of a novel electron gun in accordance with the present invention.

Fig. 5 is a partial section top view of a first embodiment of the prefocusing lens of the present invention.

Fig. 6 is a section view of an electrode of the prefocusing lens of Fig. 5, taken along line 6-6.

Fig. 7 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens electrode of Fig. 5.

Figs. 8 and 9 are section views of the electron gun shown in Fig. 4, taken along lines 8-8 and 9-9.

Fig. 10 is a partial section top view of a second embodiment of the prefocusing lens of the present invention.

Fig. 11 is a section view of an electrode of the prefocusing lens of Fig. 10, taken along line 11-11.

Fig. 12 is a graph of the beam current density contour at the center of the screen for an electron gun

This is the replacement sheet

Date: 30 JUL 1996



1 utilizing the prefocusing lens of Fig. 10.

Fig. 13 is a partial section top view of a third embodiment of the prefocusing lens of the present invention.

5 Fig. 14 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 13.

Fig. 15 is a partial section top view of a fourth embodiment of the prefocusing lens of the present invention.

Fig. 16 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 15.

15 Fig. 17 is a section view of a prior embodiment of an electrode of the prefocusing lens.

Fig. 18 is a graph of the beam current density contour at the center of the screen for an electron gun using the prior prefocusing lens electrode of Fig. 17.

20

Fig. 1 shows a rectangular color picture tube 10 having a glass envelope 11 comprising a rectangular faceplate panel 12 and a tubular neck 14 connected by a rectangular funnel 16. The panel 12 comprises a viewing faceplate 18 and a peripheral flange or sidewall 20 which is sealed to the funnel 16 with a frit seal 21. A mosaic three-color phosphor screen 22 is located on the inner surface of the faceplate 18. The screen is preferably a line screen with the phosphor lines extending substantially perpendicular to the high frequency raster line scan of the tube (normal to the plane of Fig. 1). Alternatively, the screen could be a dot screen. A multiapertured color selection electrode or shadow mask 24 is removably mounted, by conventional means, in predetermined, spaced relation to the screen 22. An improved inline electron gun 26, shown schematically by dashed lines in Fig. 1, is centrally mounted within the neck 14 to generate and direct three

35

This is the replacement sheet

Date: 30 JUL 1996



1 electron beams 28, along coplanar convergent beam paths,
through the mask 24 to the screen 22.

The tube of Fig. 1 is designed to be used with an
external magnetic deflection yoke, such as the yoke 30,
5 located in the neighborhood of the funnel-to-neck
junction. When activated, the yoke 30 subjects the three
beams 28 to magnetic fields which cause the beams to scan
horizontally and vertically, in a rectangular raster, over
the screen 22. The initial plane of deflection (at zero
10 deflection) is shown by the line P-P in Fig. 1, at about
the middle of the yoke 30. Because of fringe fields, the
zone of deflection of the tube extends axially from the
yoke 30 into the region of the gun 26. For simplicity, the
actual curvature of the deflection beam paths in the
15 deflection zone is not shown in Fig. 1.

The inline electron gun 26 includes six electrodes,
G1 through G6, in addition to the cathodes, K. The gun
may be of a first type 26', shown in Fig. 2, in which the
G2 and G4 electrodes are interconnected and operated at a
20 first potential, and the G3 and G5 electrodes are
interconnected and operated at a second potential; or the
gun may be of a second type 26'', shown in Fig. 3, in which
the G3 and G5 electrodes are interconnected and operated at
a third potential, and the G4 and G6 electrodes are
25 interconnected and operated at a fourth potential. In each
of the electron guns 26' and 26'', three electron lenses,
L₁, L₂, and L₃, are formed by the above-identified
electrodes. The present invention relates primarily to the
second or prefocusing lens, L₂.

30 The details of a first embodiment of the novel
electron gun 26' are shown in Figs. 4 through 9. With
reference to Fig. 4, the gun 26' comprises three equally
spaced coplanar cathodes 42 (one for each beam); a control
grid 44 (G1); a screen grid 46 (G2); a third electrode 48
35 (G3); a fourth electrode 50 (G4); a fifth electrode 52
(G5), the G5 electrode including a portion G5' identified
as element 54, for a purpose described below; and
a sixth electrode 56 (G6). The electrodes are spaced

This is the replacement sheet

Date: 3 2 1966

1 from the cathodes, in the order named, and are attached to a pair of support rods (not shown).

5 The G1 electrode 44, the G2 electrode 46 and a first portion 72 of the G3 electrode 48, facing the G2 electrode 46, comprise a beam-forming region of the electron gun 26' and form the first electron lens, L1. Another portion 74 of the G3 electrode 48, the G4 electrode 50 and the G5 electrode 52 comprise an asymmetric prefocusing or second electron lens, L2, one embodiment of which is shown in Fig. 10 5. The element (G5' electrode portion) 54 and the G6 electrode 56 comprise a third or main focusing lens L3.

15 Each cathode 42 comprises a cathode sleeve 58 closed at its forward end by a cap 60 having an end coating 62 of an electron emissive material thereon, as is known in the art. Each cathode 42 is indirectly heated by a heater coil (not shown) positioned within the sleeve 58.

The G1 and G2 electrodes, 44 and 46, are two closely spaced, substantially flat, plates each having three inline apertures, 64 and 66, respectively, 20 therethrough. The apertures 64 and 66 are centered with the cathode coating 62 to initiate three equally-spaced coplanar electron beams 28 (shown in Fig. 1), which are directed towards the screen 22. Preferably, the initial electron beam paths are substantially parallel, with the middle path coinciding with the central axis, A-A, of the 25 electron gun.

The G3 electrode 48 includes a substantially flat outer plate portion 68 having three inline apertures 70 therethrough, which are aligned with the apertures 66 and 64 in the G2 and G1 electrodes, 46 and 44, respectively. 30 The G3 electrode 48 also includes a pair of cup-shaped first and second portions, 72 and 74, respectively, which are joined together at their open ends. The first portion 72 has three inline apertures 76, formed through the bottom of the cup, which are aligned with the apertures 70 in the 35 plate 68. The second portion 74 of the G3 electrode has three apertures 78 formed through its bottom, which are aligned with the apertures 76 in the first portion 72.



1 Extrusions 79 surround the apertures 78. Alternatively,
the plate portion 68, with its inline apertures 70, may be
formed as an internal part of the first portion 72.

5 As shown in Fig. 5, the G4 electrode 50 comprises a
plate having identically-shaped recesses 51a and 51b formed
in the opposed major surfaces thereof. Three inline
apertures 80 are formed through the body of the electrode
50, within the recesses 51a and 51b, and aligned with the
apertures 78 in the G3 electrode 48.

10 Again with respect to Fig. 4, the G5 electrode 52 is
a deep-drawn, cup-shaped member having three apertures 82,
surrounded by extrusions 83, formed in the bottom end
thereof. A substantially flat plate member 84, having
three apertures 86, aligned with the apertures 82, is
15 attached to and closes the open end of the G5 electrode
52. A first plate portion 88, having a plurality of
openings 90 therein, is attached to the opposite surface of
the plate member 84.

The G5' electrode portion 54 comprises a deep-drawn,
20 cup-shaped member having a recess 92 formed in the bottom
end thereto, with three inline apertures 94 extending
therethrough. Extrusions 95 surround the apertures 94. The
opposite open end of the G5' electrode portion 54 is closed by
a second plate portion 96 having three openings 98 formed
25 therethrough. The openings 98 are aligned and cooperate
with the openings 90, in the first plate portion 88, in a
manner described below.

The G6 electrode 56 is a cup-shaped, deep-drawn
member having a large opening 100 at one end through which
30 all three electron beams pass, and an open end which is
attached to and closed by a plate member 102 that has three
apertures 104 therethrough which are aligned with the
apertures 94 in the G5' electrode portion 54. Extrusions 105
surround the apertures 104.

35 The shape of the recess 51b, formed in the G4
electrode 50, is shown in Fig. 6. The recesses 51a and 51b
have a uniform vertical height at each of the apertures 80
and have rounded ends. Such a shape has been referred to



1 as the "race-track" shape. The recess 92, formed in the
bottom end of the G5' electrode portion 54, is also race-
track shaped, but it differs dimensionally from the recesses
51a and 51b in the G4 electrode 50 as described below.

5 The shape of the large opening 100 in the G6
electrode 54 is shown in Fig. 8. The opening 100 is
vertically higher at the outside apertures 104 than it is
at the center aperture. Such a shape has been referred to
as the "dog-bone" or "barbell" shape.

10 With respect to Fig. 4, the first plate portion 88
of the G5 electrode 52 faces the second plate portion 96 of
the G5' electrode portion 54. The apertures 90 in the first
plate portion 88 have extrusions extending from the plate
portion that have been divided into two segments, 106 and 108,
15 for each aperture. The apertures 98 in the second plate portion
96 of the G5' electrode portion 54 also have extrusions
extending from the plate portion 96 that have been divided
into two segments, 110 and 112, for each aperture. As
shown in Fig. 9, the segments 106 and 108 are interleaved
20 with the segments 110 and 112. These segments are used to
create quadrupole lenses in the paths of each electron beam
when different potentials are applied to the G5 and G5'
electrode and electrode portion 52 and 54, respectively. By
proper application of a dynamic voltage differential to either
25 the G5 electrode 52 or the G5' electrode portion 54, it is
possible to use the quadrupole lenses established by the
segments 106, 108, 110 and 112 to provide an astigmatic correction
to the electron beams, which compensates for astigmatism occurring
in either the electron gun or the deflection yoke. Such a
30 quadrupole lens structure is described in U.S. Pat. No.
4,731,563, issued to Bloom et al. on March 15, 1988.

35 The novel second lens, L2, of the present invention
does not require the use of a quadrupole lens formed by the
above-described G5 and G5' electrode and electrode portion,
52 and 54, respectively. A unitized G5 electrode, fabricated by

This Sheet Has Been Replaced



This is the replacement sheet.

Date:

11 1988

1 eliminating the first and second plate portions 88 and 96
 and attaching together the open ends of elements 52 and 54,
 may be used; however, such a gun structure would not
 provide an optimized deflected electron beam shape, although
 5 it might be useful where a tradeoff between performance and
 cost is permissible.

Specific dimensions of a computer modeled electron
 gun for the first preferred embodiment are presented in
 10 TABLE I.

TABLE I

		inches	mm
	K-G1 spacing	0.003	0.08
15	Thickness of G1 electrode 44	0.004	0.10
	Thickness of G2 electrode 46	0.028	0.71
	G1 and G2 aperture diameter	0.025	0.64
	G1 to G1 spacing	0.008	0.20
	G2 to G3 spacing	0.030	0.76
20	Thickness of G3 plate portion 68	0.010	0.25
	Diameter of G3 apertures 70	0.045	1.14
	Diameter of G3 apertures 78	0.148	3.76
	Length of G3 electrode 48	0.200	5.08
	G3 to G4 spacing	0.050	1.27
25	Thickness of active area of G4 electrode 50	0.025	0.64
	Diameter of G4 aperture 80	0.158	4.01
	Horizontal width of recesses 51a and 51b	0.785	19.94
	Vertical height of recesses 51a and 51b	0.239	6.07
	Depth of recesses 51a and 51b	0.030	0.76
30	G4 to G5 spacing	0.050	1.27
	Overall length of G5 electrode 52 and G5' electrode portion 54	0.970	24.64
	Spacing between plate portions 88 and 96	0.040	1.02
	Horizontal width of recess 92	0.755	19.18
35	Vertical height of recess 92	0.326	8.28
	Depth of recess 92	0.115	2.92
	Diameter of apertures 82, 90, 98	0.158	4.01

This Sheet Has Been Replaced



This is the replacement sheet

Date: 30 JUL 1996

1	TABI I Cont		
		inches	mm
	Aperture-to-aperture spacing K to G5 bottom	0.260	6.60
	Diameter of G5' aperture 94 (center)	0.160	4.06
5	Diameter of G5' apertur s 94 (outer)	0.180	4.57
	G5' to G6 spacing	0.050	1.27
	Length of G6 electrode 6	0.150	3.81
	Horizontal width of opening 100	0.742	18.85
	Maximum height of opening 100	0.295	7.49
10	Minimum height of opening 100	0.289	7.34
	Depth of opening 100	0.135	3.43
	Diameter of G6 aperture 105 (center)	0.160	4.06
	Diameter of G6 aperture 105 (outer)	0.180	4.57
	Aperture-to-aperture spacing G5'top/G6	0.245	6.22
15	Length of G3 extrusions 79	0.045	1.14
	Length of G5 extrusions 83	0.045	1.14
	Length of G5' extrusions 95	0.034	0.86
	Length of G6 extrusions 105	0.045	1.14

20 In the embodiment presented in TABLE I, the electron gun is electrically connected as shown in Fig. 2. Typically, the cathode operates at about 150V, the G1 electrode at ground potential, the G2 and G4 electrodes are electrically interconnected and operate within the range of
25 about 300V to 1000V, the G3 and G5 electrodes also are electrically interconnected and operate at about 7650V, and the G6 electrode operates at an anode potential of about 25kV.

30 In the electron gun 26', the first lens, L1 (Fig. 2), provides a symmetrically-shaped, high quality electron beam into the second lens, L2. The first lens, L1, comprises the beam forming region of the gun and includes the G1 electrode 44, the G2 electrode 46, and the
35 first portion of the G3 electrode 48 adjacent the G2 electrode.

The second lens, L2, is the novel asymmetric prefocusing lens and comprises the G4 electrode 50 and





1 the adjacent portions of the G3 electrode 48 and the G5
electrode 52. In the first embodiment, the identical pair
of recesses, 51a and 51b, are formed in the opposed, major,
active surfaces of the G4 electrode 50 (see, e.g., Figs. 5
5 and 6). While the recesses are preferably race-
track shaped, other shapes, e.g., rectangular, which
produce the effect described below, are within the
scope of the present invention. The active, facing
surfaces of the G3 and G5 electrodes, 48 and 52,
10 respectively, are substantially flat. The combination of
the above-described active elements produces quadrupole
fields which form the asymmetric or astigmatic prefocusing
lens which provides a horizontally-elongated electron beam
(not shown) into the third or main focusing lens, L3. By
15 providing the astigmatic focusing correction in the
prefocusing lens, L2, beyond the electron beam cross-over
point which occurs within the first lens, L1, the
effectiveness of each quadrupole field is substantially
independent of changes in the beam current. Additionally,
20 the race-track-shaped recesses, 51a and 51b, provide a
preconverging action which eliminates misconvergence of the
outer beams at the screen, due to changes in the focus
voltage, by providing a compensating change in the strength
of the prefocusing lens, L2.

25 While the invention is described in terms of two
recesses, it is possible to achieve the same results by
forming only one recess in either surface of the G4
electrode 50. The single recess would have a greater depth
than either of the recesses 51a or 51b, and the lateral
30 dimensions, i.e., vertical height and horizontal width,
would be less than those of either of the recesses, to provide
equivalent asymmetric and convergence corrections to the
beams. The dimensions of the single recess would depend
upon the extent of beam corrections required.

35 The main focusing lens, L3, formed between the G5'
electrode portion 54 and the G6 electrode 56, also is an
asymmetric lens, having low aberration, which provides a
vertically elongated, or asymmetrically-shaped, electron
beam spot at _____

1 the center of the screen. The spacing between adjacent
apertures 94 in the G5' electrode portion 54 and the
apertures 104 in the G6 electrode 56 is 6.22mm, rather than
the 6.60mm aperture-to-aperture spacing that exists from the
5 cathodes to the apertures 82 in the bottom G5 electrode 52.
This reduced main lens aperture-to-aperture spacing ensures
that the preconverged outer beams pass through low-aberration
regions of the main lens, L3, to minimize coma
distortions. A graph of a computer simulation of the
10 electron beam spot at the center of the screen of a
27V110⁰ tube, operated at a cathode drive voltage of
103.2V, a G3/G5 focus voltage of 7650V, an ultor
voltage of 25kV and 4mA beam current, is shown in Fig. 7.
The beam spot is elliptically-shaped along the vertical
15 axis to reduce the overfocusing action of the yoke when the
beam is deflected. The undeflected, center beam spot
includes a substantially rectangularly-shaped 90% peak beam
current density portion, which is circumscribed by larger
elliptically-shaped 50% and 5% peak beam current density
20 portions. The size of the 5% peak beam current density
spot is about 2.5mm x 4.2mm (HxV). With the width of the
G4 recesses 51a and 51b as specified in TABLE I, and the
overall length of the gun from the G3 bottom to the top of
the G5' electrode portion adjusted to 35.05mm, the focus
25 voltage is kept below 7700V, and the misconvergence of the
outer beam is reduced to substantially zero.

By utilizing the multipole lens described with
respect to Fig. 4, and applying to the G5' electrode portion
54 a dynamic differential focus voltage that ranges from the
30 potential on the G5 electrode 52, with no deflection, to
about 1000 volts more positive at maximum deflection, the
beam current density spot size can be optimized when the
beams are deflected to the periphery of the screen. This
mode of operation is discussed in U.S. Pat. No. 4,764,704,
35 issued to New et al. on Aug. 16, 1988.

A second embodiment of the present invention is
obtained by increasing the length of the G3 electrode 148



1 to 5.84mm, from the value of 5.08mm shown in TABLE I, and
modifying the asymmetric prefocusing lens, L2, as shown in
Fig. 10. In the second embodiment of the lens L2, the G4
electrode 150 comprises a substantially flat plate having a
5 thickness of about 0.025 inch (0.64mm), with circular
apertures 180 formed through the oppositely disposed,
active, major surfaces thereof. The active surfaces of the
facing G3 and G5 electrodes, 148 and 152, respectively,
have rectangular slots enclosing the electron beam apertures.
10 As shown in Fig. 11, each of the slots 149, in the G3
electrode 148, has a slot width, W, of 5.82mm, and a
slot height, H, of 10.16mm. Also, each of the slots 149 has a
depth, d, of 0.76mm, shown in Fig. 10. The slot-to-slot
spacing, S, shown in Fig. 11, is 7.11mm. Inasmuch as the
15 aperture-to-aperture spacing, s, within the prefocusing
lens, L2, is 6.60mm, and the slot-to-slot spacing, S, is
7.11mm, it can be seen, in Fig. 11, that the two outer slots
149 in the G3 electrode 148 are displaced outwardly
relative to the outer apertures 178 formed therein. This
20 displacement of the slots 149 in the G3 electrode, and a
similar displacement of the identically-dimensioned slots
153 in the G5 electrode 152, cooperate to form an
asymmetric prefocusing lens, L2, which provides a
horizontally-elongated electron beam (not shown) into the
25 third lens, L3. The novel slot configuration in the G3 and
G5 electrodes 148 and 152, respectively, also provides a
preconverging action to eliminate misconvergence of the
outer beams at the screen, in a manner similar to that
described for the first embodiment. A computer simulation
30 of the resultant vertically-elongated beam spot at the
center of the screen is graphically shown in Fig. 12. When
operated at an ultor voltage of 25kV and 4mA beam current
in a 27V110⁰ tube, the beam sizes at 90% and 50% peak
current density are comparable to those of the first
35 embodiment, shown in Fig. 7, and the beam size at 5% peak
current density is about 2.26mm x 3.68mm (HxV), at a
cathode drive voltage of 103.2V and a G3/G5 focus voltage
of 7650V. All other gun parameters are as listed in TABLE
I.



1 Equivalent performance can be achieved by forming
the slots in only one of the active surfaces, i.e., in
either the G3 electrode 148 or the G5 electrode 152. Slots
formed in only one active surface must be deeper than the
5 slots described above, and the small dimension of each slot
must be reduced, while the amount of outer slot offset must
be increased.

A third embodiment of the present invention is
achieved by modifying the electron gun to provide the
10 electrical configuration shown in Fig. 3. The asymmetric
prefocusing lens, L2, of the gun 26" is shown in Fig. 13.
The length of the G3 electrode 248 is maintained at 5.84mm,
the same dimension utilized in the second embodiment, and a
race-track-shaped recess 249 is formed in the active,
15 major surface of the G3 electrode facing the G4 electrode
250. The recess 249 has a horizontal width of 19.43mm, a
vertical height of 5.84mm and a depth of 0.76 mm. An
identically-shaped and dimensioned race-track recess 253
is formed in the active surface of the G5 electrode 252,
20 facing the substantially flat G4 electrode 250. While the
race-track shape is preferred, other geometric shapes
which provide an asymmetric lens with a preconvergence
correction may be used. In the third embodiment, the G4
electrode 250 has a thickness of about 0.64mm, with circular
25 apertures 280 formed therethrough. The asymmetric
prefocusing lens, L2, of the third embodiment provides the
preconverging action, and forms horizontally-elongated
electron beams (not shown), as previously described, into
the third lens, L3. A computer simulation of the resultant
30 vertically-elongated beam spot at the center of the screen
is graphically shown in Fig. 14. When operated at an
ultor/G4 voltage of 25kV and 4mA beam current in a
27V110° tube, the beam size and shape at 90% peak beam
current density is larger and more elliptical than in the
35 first and second embodiments, while at 50% peak beam
current density the elliptically-shaped spot is more
vertically elongated than in the first two embodiments.





1 At 5% peak beam current density, the beam spot size is
about 1.94mm x 3.44mm (HxV). The cathode drive voltage in
this embodiment is 103.2V, the G3/G5 focus voltage is 7650V
and the G2 voltage is typically about 400V. All other gun
5 parameters are as listed in TABLE I.

As described above, a single recess can be formed in
either the active surface of the G3 or G5 electrodes, 248
or 252, respectively, if the depth is increased and the
lateral dimensions are suitably reduced to provide
10 equivalent performance.

A fourth embodiment of the asymmetric prefocusing
lens, L2, is shown in Fig. 15. The length of the G3
electrode 348 is 5.08mm, and the active surface facing the
G4 electrode 350 is substantially flat, with three circular
15 apertures 378 formed therethrough. The apertures 378 have
a diameter of 4.01mm. The G4 electrode 350 has rectangular
slots 350a and 350b formed in the opposed major active
surfaces thereof, with the slots 350a facing the G3
electrode 348 and the slots 350b facing the G5 electrode
20 352. Each of the slots 350a and 350b has a width of
5.79mm, a height of 10.16mm and a depth of 0.76mm. The
slot-to-slot spacing is 7.01mm. The circular apertures
380, formed through the G4 electrode 350, have a diameter
of 4.01mm and are enclosed within the rectangular slots
25 350a and 350b, in the same manner as discussed with respect
to the slots shown in Fig. 11. The active major surface of
the G5 electrode 352 facing the G4 electrode 350 also is
substantially flat, with three circular apertures 382
formed therethrough. The apertures 382 also have a
30 diameter of 4.01mm.

Inasmuch as the aperture-to-aperture spacing within the
prefocusing lens, L2, is 6.60mm and the slot-to-slot
spacing of the slots 350a and 350b of the G4 electrode 350
is 7.01mm, the two outer slots are displaced outwardly
35 relative to the outer apertures 380 formed within the
slots. The configuration and displacement of the G4 slots
form an asymmetric lens which provides the preconverging
action and horizontally-elongated electron beams (not

This is the replacement sheet

O&M. 30 JUL 1996

1 shown), as previously described, into the third lens, L3.
A computer simulation of the resultant vertically-elongated
beam spot at the center of the screen is graphically shown
in Fig. 16. The beam spot shape is similar to that shown
5 in Fig. 14. When operated at an ultor/G4 voltage of 25kV
and 4mA beam current in a 27V110⁰ tube, the beam size at
5% peak beam current density is about 1.96mm x 3.49mm
(HxV), at a cathode drive voltage of 103.2V and a G3/G5
focus voltage of 7700V. The G2 voltage in this embodiment
10 is typically about 400V. All other gun parameters are as
listed in TABLE I.

Alternatively, slots can be formed in only one of
the active surfaces of the G4 electrode 350. The depth of
the slots must be increased, and the small dimension of each
15 slot must be decreased, from the respective dimensions
described immediately above. Additionally, the amount of
offset of the outer slots must be increased to obtain
performance equivalent to that of the fourth embodiment.

20 The novel electron gun of the present invention is
to be contrasted to an electron gun of the type described
in U.S. Pat. No. 4,764,704, referenced above. In that
patent, a G4 electrode, similar to the G4 electrode 450 of
25 the prefocusing, or second, lens shown in Fig. 17 herein,
has rectangularly-shaped
apertures 480 therethrough. Specific dimensions of a
computer model of an embodiment of that prior electron gun
are presented in TABLE II. That embodiment has the electrical
30 configuration shown in Fig. 2 herein, and is similar in
construction to the electron gun shown in Fig. 4 herein,
with similar gun elements being identified with corresponding
numbers, prefixed by the number "4".

35

This Sheet Has Been Replaced



This is the reference sheet

30 JUL 1996



TABLE II

		inches	mm
1	K-G1 spacing	0.003	0.08
	Thickness of G1 electrode 444	0.004	0.10
5	Thickness of G2 electrode 446	0.028	0.71
	G1 and G1 aperture diameters	0.025	0.64
	G1 to G2 spacing	0.008	0.20
	G2 to G3 spacing	0.030	0.76
	Thickness of G3 bottom plate 468	0.010	0.25
10	Diameter of G3 aperture 470, center	0.045	1.14
	Diameter of G3 apertures 470, outer	0.052	1.32
	Diameter of G3 apertures 478	0.148	3.76
	Length of G3 electrode 448	0.200	5.08
	G3 to G4 spacing	0.500	1.27
15	Thickness of G4 electrode 450	0.025	0.64
	Dimensions of G4 electrode apertures 480	0.158V X 0.172H	4.01V X 4.37H
	G4 to G5 spacing	0.050	1.27
	Length of G5 electrode * 452-454	0.830	21.08
20	Diameter of apertures 482	0.158	4.01
	Diameter of aperture 494 (center)	0.160	4.06
	Diameter of apertures 494 (outer)	0.180	4.57
	Horizontal width of recess 492	0.755	19.18
	Vertical height of recess 492	0.326	8.28
25	Depth of recess 492	0.115	2.29
	Aperture-to-aperture spacing K to G5 bottom **	0.260	6.60
	G5 to G6 spacing	0.050	1.27
	Length of G6 electrode	0.150	3.81
30	Horizontal width of opening 400	0.742	18.85
	Maximum height of opening 400	0.295	7.49
	Minimum height of opening 400	0.289	7.34
	Depth of opening 400	0.135	3.43
	Diameter of aperture 404 (center)	0.160	4.06
35	Diameter of apertures 404 (outer)	0.180	4.57
	Aperture-to-aperture spacing G5 top/G6	0.245	6.22
	Length of G3 extrusions 479	0.045	1.14
	Length of G5 extrusions 483	0.045	1.14

This is the replacement sheet

Date: 10/10/88

1

TABLE II Cont

		inches	mm
	Length of G5 extrusions 495	0.034	0.86
5	Length of G6 extrusions 405	0.045	1.14
	* unitized electrode, no multipole lens		
	** the aperture-to-aperture spacing of the G3 bottom		
	apertures 470 is increased to 0.2635 inch (6.69mm) to		
	eliminate any displacement of the outer electron beams		
10	with changes in the focus voltage.		

In the prior electron gun described in TABLE II, the cathode operates at a drive voltage of about 103.2V, the G1 electrode is at ground potential, the G2 and G4 are electrically interconnected and operate within the range of 300V to 1000V, the G3 and G5 electrodes also are interconnected and operate at about 6600V, and the G6 electrode operates at an anode potential of about 25kV. The prefocusing lens, L2, of the prior electron gun, with the rectangular apertures 480 formed through the substantially flat G4 electrode 450, provides a horizontally-elongated electron beam (not shown) into the main focusing lens, L3. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 18. The beam size at 5% peak current density is about 2.30mm x 3.49mm (HxV) at the previously described operating parameters.

CONCLUSION

The performance of the present prefocusing lens, L2, of embodiments 1 through 4, as measured by the resultant electron beam spot size on the screen, is comparable to that of the prior electron gun described in U.S. Pat. No. 4,764,704, which utilizes a prefocusing lens having rectangularly-shaped apertures in the G4 electrode thereof. A comparison of results is contained in TABLE III.



1

TABLE III

<u>EMBODIMENT</u>		<u>Beam Spot Size on Screen</u>	
		<u>Horizontal (mm)</u>	<u>Vertical (mm)</u>
5	1	2.50	4.20
	2	2.26	3.68
	3	1.94	3.44
	4	1.96	3.49
Prior		2.30	3.49

10

The four embodiments of the present electron gun structure provide ease of manufacturing, because the use of circular apertures throughout the electron gun reduce the misalignment problems posed by the rectangularly-shaped G4 apertures of the prior gun. Additionally, the prior gun requires a slight increase in the G3 aperture-to-aperture spacing (from 6.60mm to 6.69mm) to eliminate the misconvergence of the outer electron beams with changes in focus voltage. The present invention achieves comparable performance by controlling either the horizontal width of the race-track-shaped recesses within the prefocusing lens, L2, in embodiments 1 and 3, or the slot-to-slot spacing of the rectangular slots formed within prefocusing lens, L2, in embodiments 2 and 4. In each of the four embodiments, the aperture-to-aperture spacing from the cathode 42 to the bottom of the G5 electrode 52 is maintained at a constant value of 6.60mm, thereby simplifying the assembly and alignment of the gun components.

30

This Sheet Has Been Replaced



This is the replacement sheet.

30 JUL 1996

CLAIMS

1. A color cathode-ray tube including an envelope having therein an inline electron gun for generating and directing
5 three inline electron beams along initially coplanar beam paths toward a screen on an interior portion of said envelope, said gun including a plurality of electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens, characterized by said prefocusing lens (L2) includes four active surfaces, at least
10 one of which has asymmetric prefocusing means (51a,51b; 149,153;249,253;350a,350b) formed therein.

2. The tube as described in claim 1, characterized in that at least two of said four active surfaces have substantially
15 identical, asymmetric prefocusing means (51a,51b;149,153; 249,253,350a,350b) formed therein.

3. The tube as described in claim 1 or 2, characterized in that three circular apertures (80;178,182;278,282;380) are
20 formed within said asymmetric prefocusing means (51a,51b; 149,153;249,253;350a,350b).

4. The tube as described in claim 2 or 3, wherein said beam-forming region includes a first electrode, a second electrode
25 and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing
30 lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens, characterized in that said fourth electrode (50;350) has substantially identical asymmetric beam-focusing recesses (51a,51b;350a,350b) formed in the oppositely disposed active
35 surfaces thereof.

This is the replacement sheet



Date: 10/1/88



5. The tube as described in claim 4, characterized in that a single recess (51a,51b) is formed in each active surface of said fourth electrode (50).

5 6. The tube as described in claim 4, characterized in that three separate, substantially rectangular recesses (350a,350b) comprising two outer recesses and a center recess are formed in each active surface of said fourth electrode (350).

10 7. The tube as described in claim 6, characterized in that each of said outer recesses (350a,350b) has an outer aperture (380) therethrough and is displaced outwardly relative to said outer aperture.

15 8. The tube as described in claim 2 or 3, wherein said beam-forming region includes a first electrode, a second electrode and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third
20 electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens, characterized in that said second portion of said third
25 electrode (148;248) and said first portion of said fifth electrode (152;252) have substantially identical, asymmetric beam-focusing recesses (149,153;249,253) formed in the active surfaces thereof.

30 9. The tube as described in claim 8, characterized in that a single recess (249,253) is formed in each of said second portion of said third electrode (248) and said first portion of said fifth electrode (252).

35 10. The tube as described in claim 9, characterized in that three separate, substantially rectangular recesses (149,153), comprising two outer recesses and a center recess, are formed in said active surfaces of said second portion of said third electrode (148) and of said first portion of said fifth electrode (152).

This is the replacement sheet



Date: 30 JUL 1996

11. The tube as described in claim 10, characterized in
that each of said outer recesses (149,153) has a circular aperture
(178,182) therethrough, said outer recesses being displaced
5 outwardly relative to the outer circular apertures.

This Sheet Has Been Replaced



* C L M S *

This is the replacement sheet.

30 JUL 1996

COLOR PICTURE TUBE HAVING AN INLINE ELECTRON GUN WITH AN
ASTIGMATIC PREFOCUSING LENS

ABSTRACT




An improved color picture tube includes an inline
electron gun (26) for generating and directing three inline
5 electron beams (28) along coplanar beam paths toward a screen
(22). The gun includes a plurality of electrodes (44,46,
48,50,52,56) which form a beam-forming region (L1), a
prefocusing lens (L2), and a main focusing lens (L3) for the
electron beams. The improvement resides within the prefocusing
10 lens, which includes four active surfaces. At least one of the
active surfaces has asymmetric prefocusing recesses formed
therein. (Figure 4)

This Sheet Has Been Replaced



This is the replacement sheet

Date: 2 1 JUL 1987

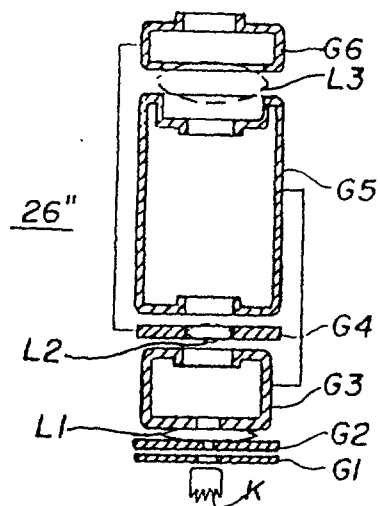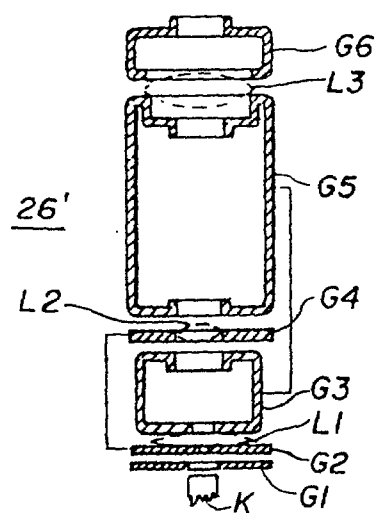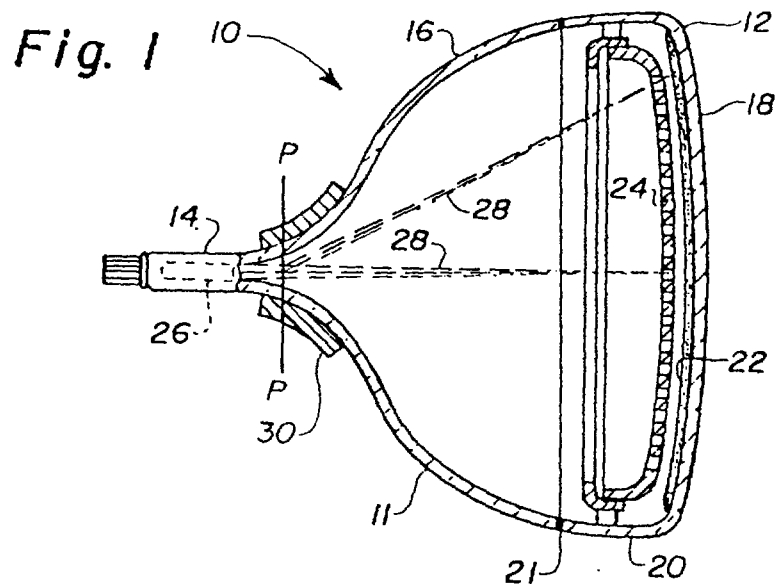

This is the replacement sheet

Date: 30 JUL 1996




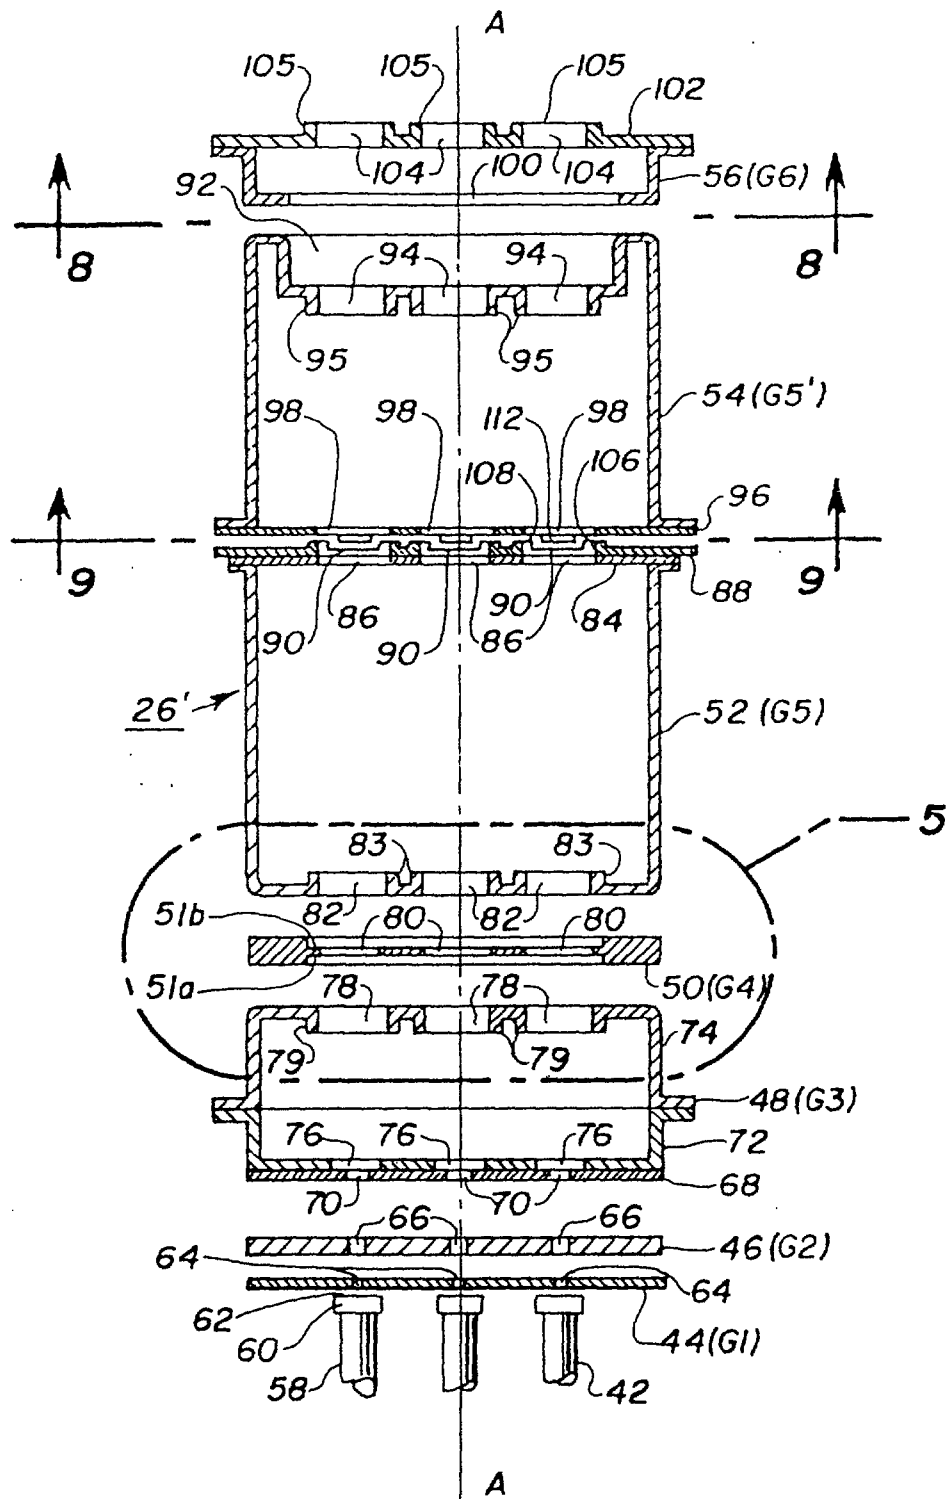


Fig. 4

This is the replacement sheet

Date 30 JUL 1996

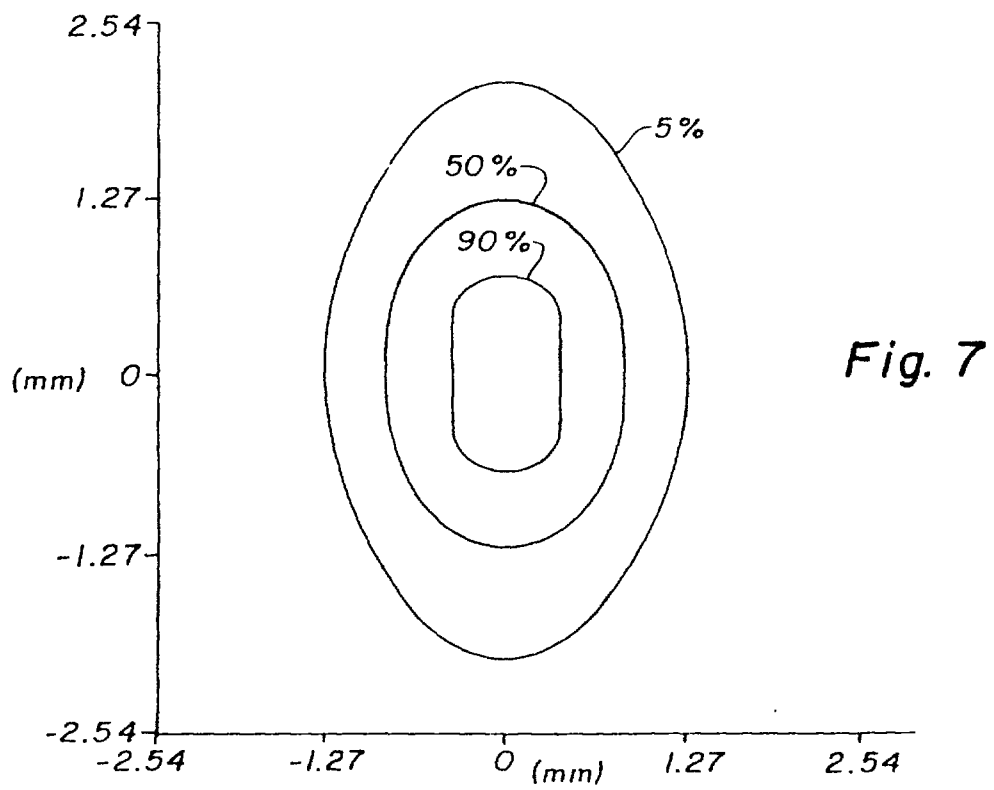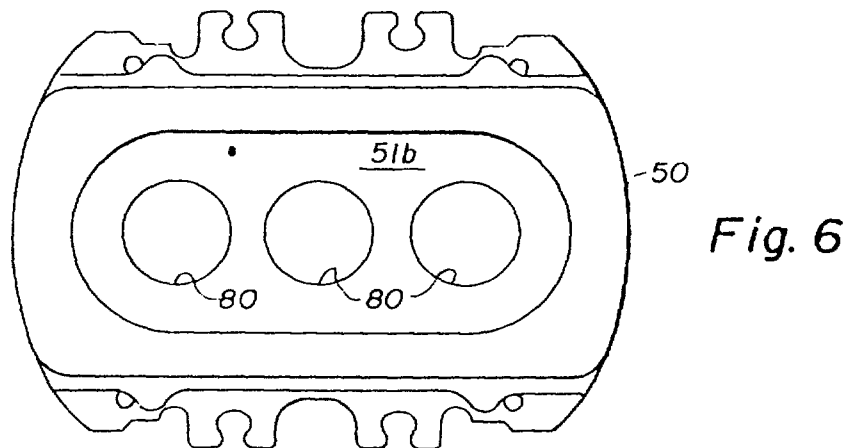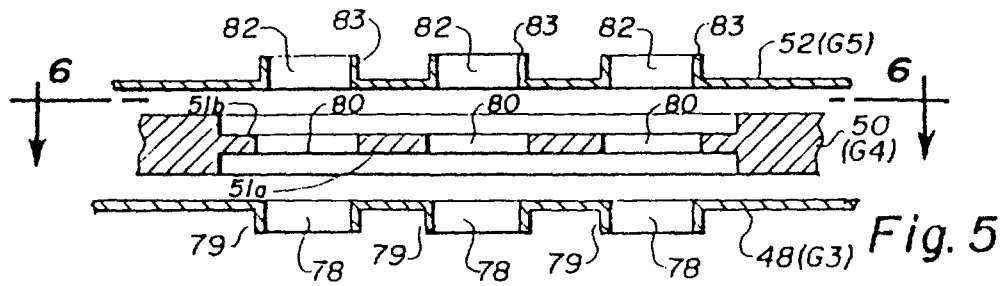

This is the replacement sheet

Date: 7 JUL 1985

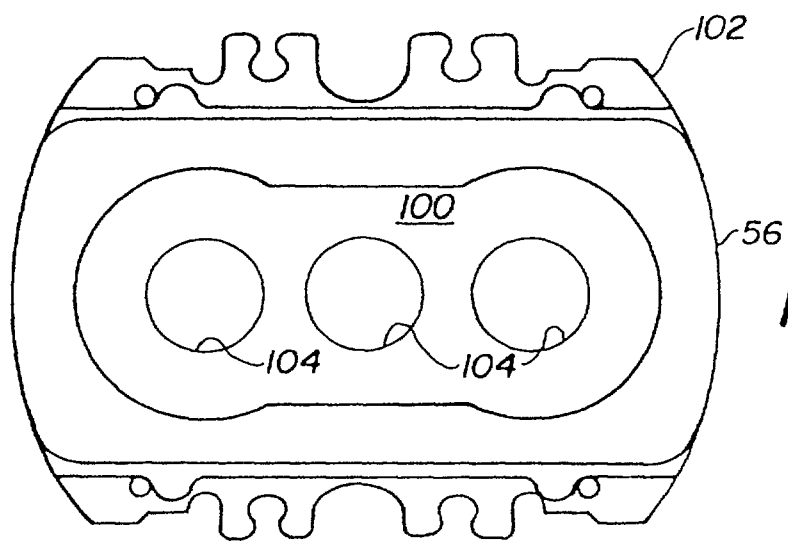


Fig. 8

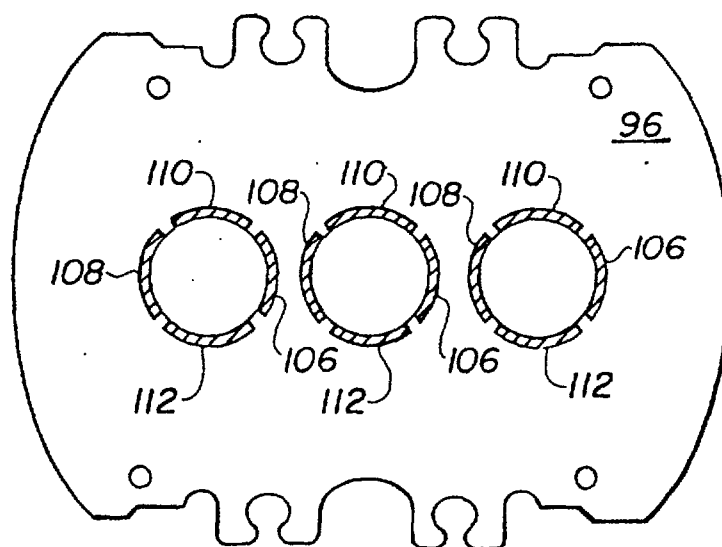


Fig. 9

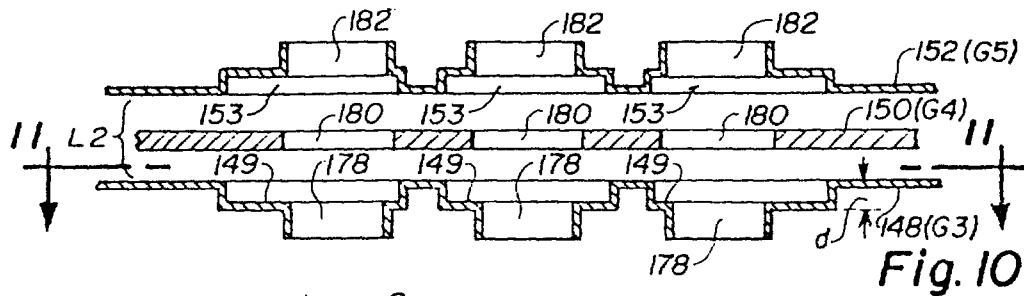


Fig. 10

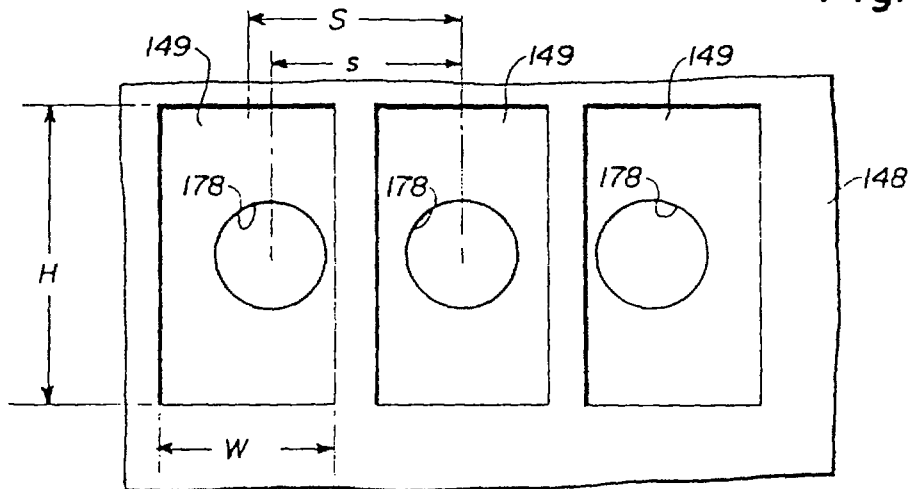


Fig. 11

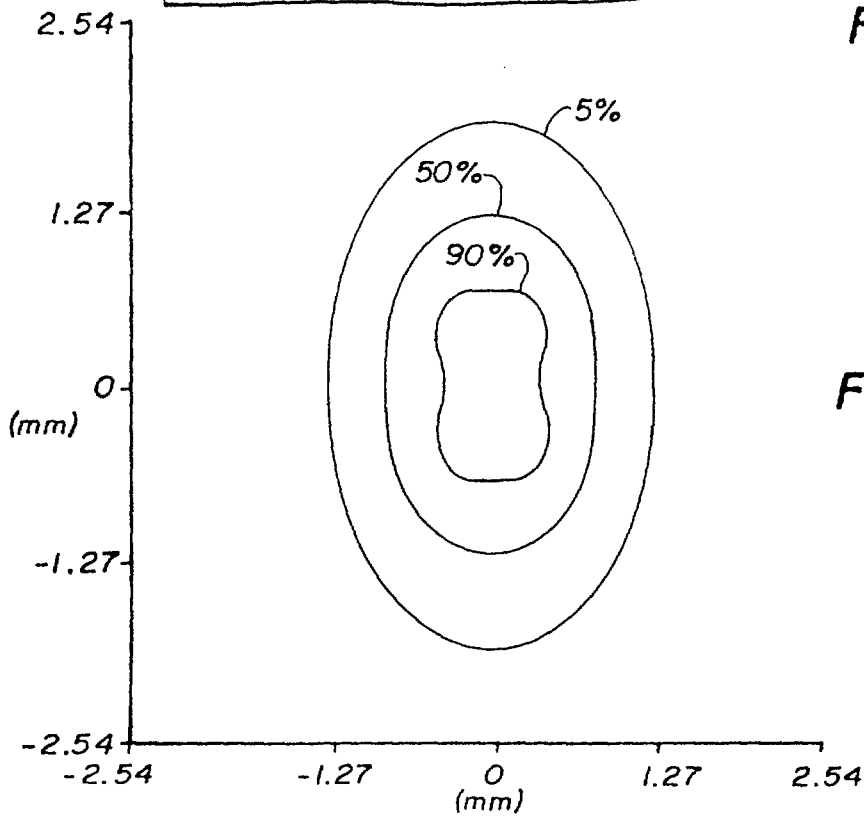


Fig. 12

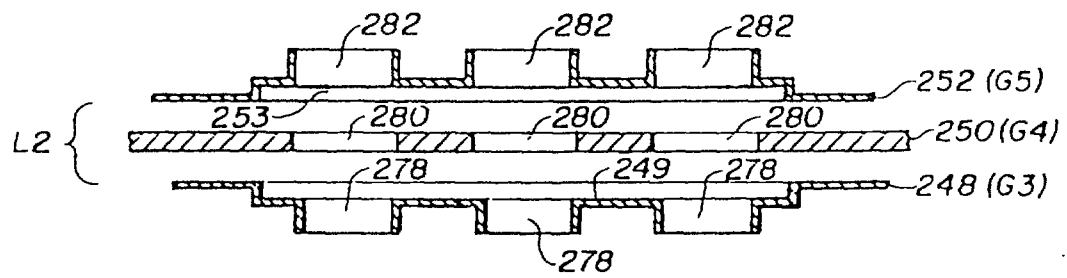


Fig. 13

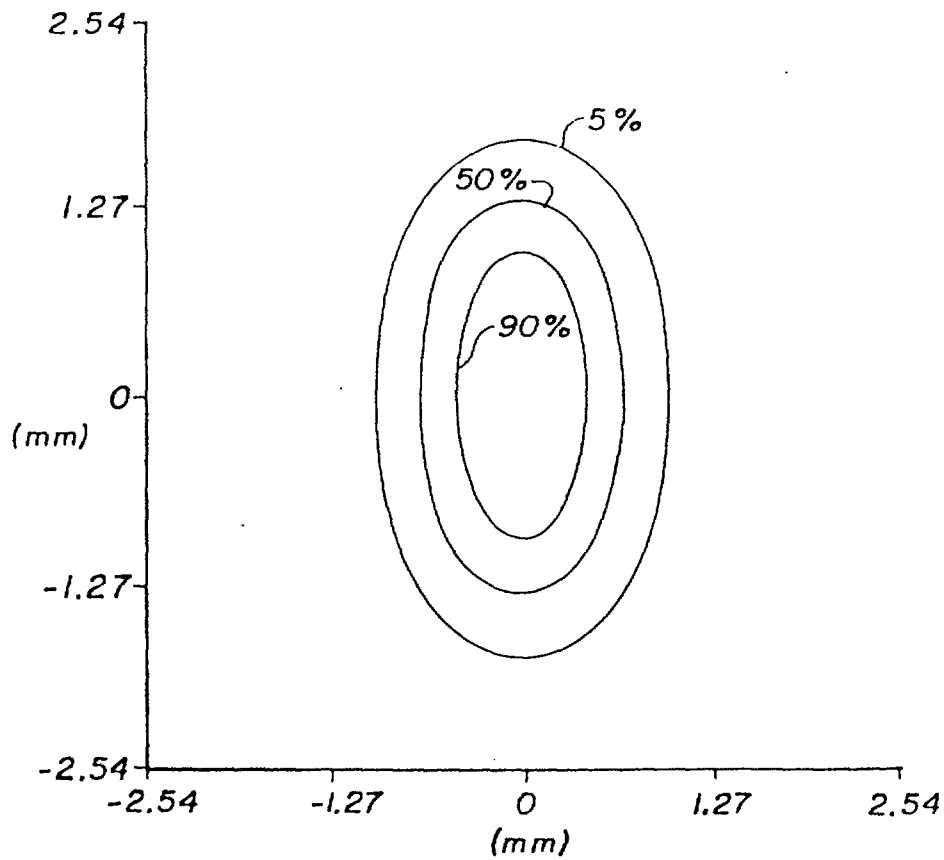


Fig. 14

This is the replacement sheet

Date: 3 0 JUL 1990

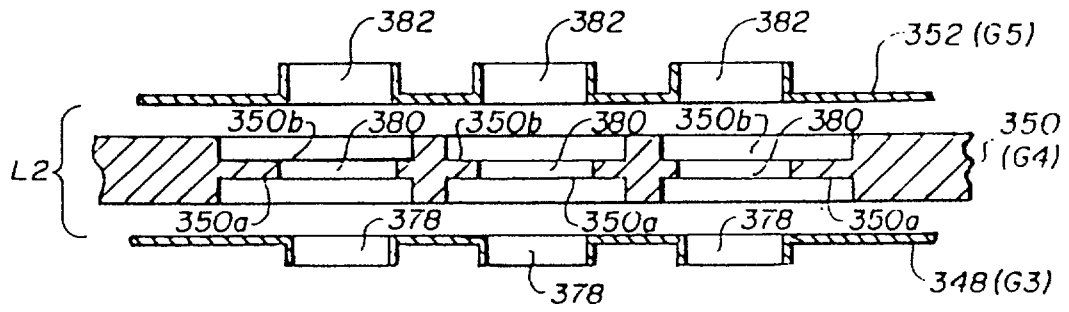


Fig. 15

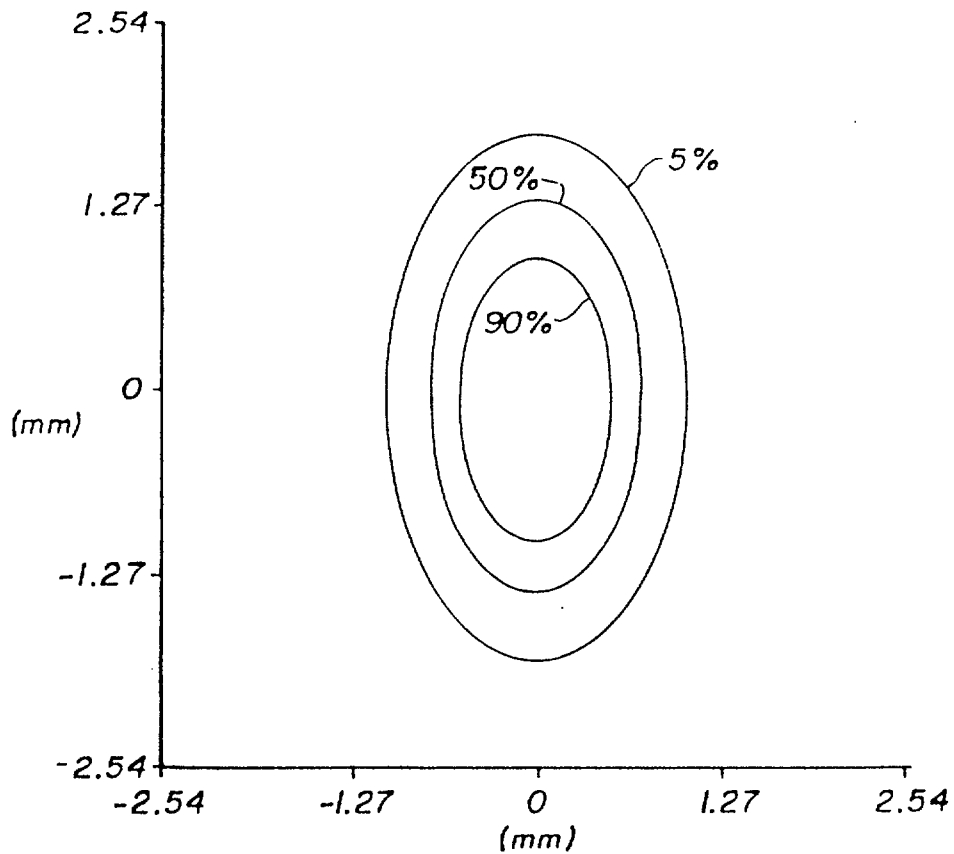


Fig. 16

This is the replacement sheet

Date: 30 JUL 1996

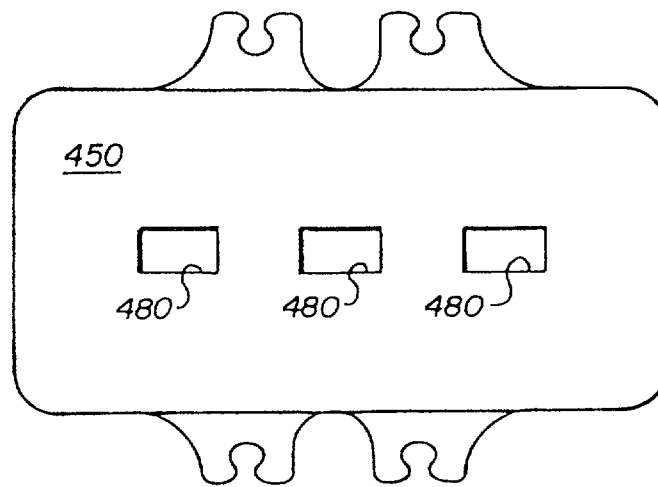


Fig. 17
PRIOR
ART

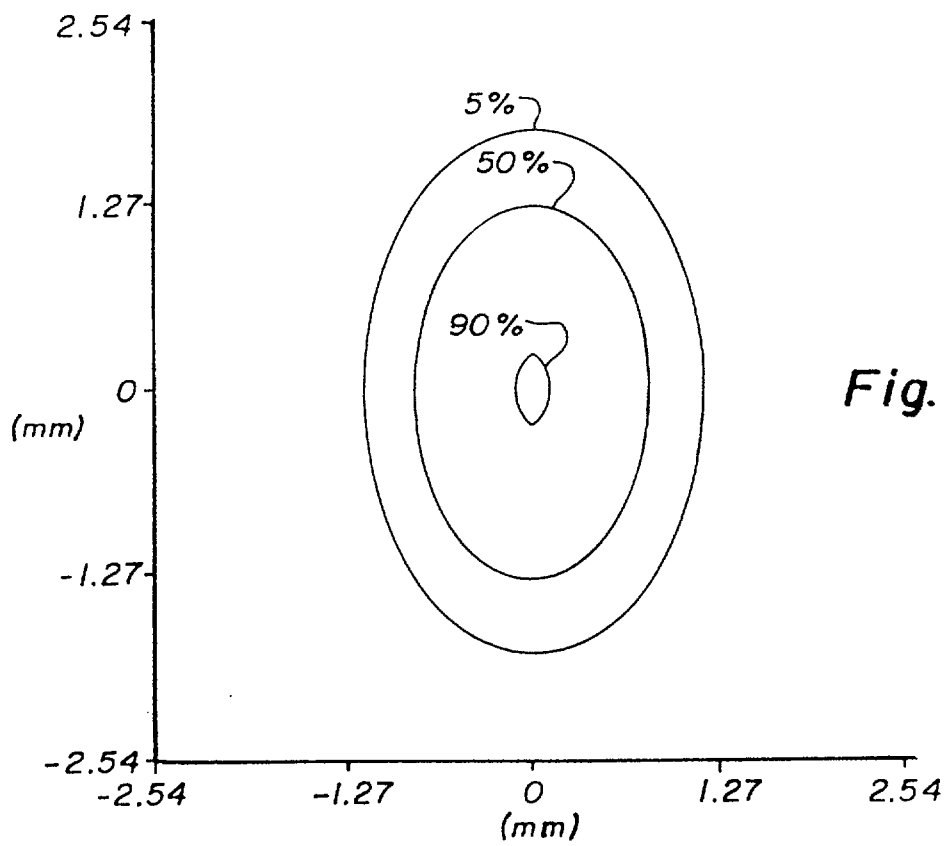


Fig. 18

This is the replacement sheet

Date: 30 JUL 1996

✓	10/10/10	10/10/10	10/10/10
✓	10/10/10	10/10/10	10/10/10
✓	10/10/10	10/10/10	10/10/10
✓	10/10/10	10/10/10	10/10/10

COLOR PICTURE TUBE HAVING AN INLINE ELECTRON GUN WITH AN ASTIGMATIC PREFOCUSING LENS

The invention is concerned with a color cathode-ray tube including the features as mentioned in the preamble of claim 1.

From EP-0 300 705 A2 a color picture tube is known which includes an electron gun for generating and directing three inline electron beams, a center beam and two side beams, along initially coplanar paths toward a screen of the tube. The gun includes three spaced electrodes which form an einzel lens in the path of each electron beam to form a main focus lens for focusing the electron beams. A first einzel lens electrode includes a first portion having three inline apertures that are set back from a second portion forming a single large aperture through which all three electron beams pass. A second einzel lens electrode includes a first portion having three inline apertures that are set back from second portion forming a single large aperture through which all three electron beams pass. The second portion of the first einzel lens electrode faces the second portion of the second einzel lens electrode. The second einzel lens electrode also includes a third portion having three inline apertures that are set back from a fourth portion forming a single large aperture through which all three electron beams pass. A third einzel lens electrode includes a first portion having three inline apertures set back from a second portion forming a single large aperture through which all three electron beams pass. The fourth portion of the second einzel lens electrode faces the second portion of the third einzel lens electrode.

An inline electron gun for a color cathode-ray tube, as known from GB-21 01 804 A, includes a main focus lens formed by two spaced electrodes each having three separate inline apertures

This is the replacement sheet

Date: - 1 JUL 1999

and a peripheral rim, and the apertured portion of each electrode is within a recess set back from the rim, wherein the width of the rim of one of the electrodes is narrower at the side beam paths than at the center beam path, measured perpendicular to the plane containing the electron beam paths. Also the recess in electrode has a width at the sidebeam paths that is wider than its width at the centre beam paths. By thus modifying the peripheral rim geometry the focus fields acting on the electron beams is balanced. In a further arrangement, the electrode is fabricated from two elements.

Further, from EP-0 301 648 A3, a color cathode-ray tube is known, which has an integrated electrode gun structure including mirrored main focusing and accelerating electrodes. The electron gun comprises a triode section formed by three inline arranged cathodes and a first and second grid electrodes whose apertures are symmetrically disposed about respective central and outer axes which pass through their respective cathodes. A prefocusing electrode having eccentric outer apertures is positioned next to the second electrode. The field produced by the prefocusing electrode serves to converge the electron beams produced in the triode section. At least one, but more conveniently two, further electrodes are provided between the prefocusing electrode and the main focusing lens electrode. The outer apertures of at least one of the further electrodes are elongated to provide an asymmetrical lens field which is used to neutralise spot errors, beam displacement and beam asymmetry. The shapes of the elongated apertures (44) are such that at a portion of their peripheries are concentric about the axes.

An electron gun, such as a six electrode gun, designed for use in a large screen entertainment-type color picture tube must be capable of generating small-sized high-current electron beam spots over the entire screen. A conventional

This is the replacement sheet

DATE: 1 JUL 1989

television receiver utilizes a color picture tube with an inline electron gun and a self-converging deflection yoke, for providing a horizontal deflection field having a pincushion-shaped distortion and a vertical deflection field having a barrel-shaped distortion. The fringe fields of such a yoke introduce into the tube strong astigmatism and deflection defocusing caused, primarily, by vertical overfocusing and, secondarily, by horizontal underfocusing of the deflected electron beams. Beam spots formed by the electron beams passing through such distorted horizontal and vertical deflection fields are asymmetrically-shaped when deflected to the periphery of the screen. Additionally, many inline electron guns exhibit a misconvergence of the outer electron beams due to a change in the strength of the electron lens caused by changes in the focus voltage. Such a misconvergence results in a variation in beam landing position with changes in focus voltage.

The object of this invention is to provide for an inline electron gun generating electron beams with improved convergence even with changes of the focus voltage. This object is being achieved by the features of claim 1. Preferred embodiments of the invention are being defined by the subclaims.

The invention addresses the above indicated problems in an expeditious and cost effective manner without sacrificing performance.

The present invention provides an improvement in a color picture tube having an inline electron gun for generating and directing three inline electron beams along coplanar beam paths toward a screen. The gun includes a plurality of electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens for the electron beams. The improvement resides within the prefocusing lens, which includes four active surfaces. At least one of the active surfaces has asymmetric prefocusing means formed therein.

In the drawings:

Fig. 1 is a plan view, partially in axial section, of a shadow mask color picture tube embodying the invention.

Figs. 2 and 3 are schematic axial section side views of electron guns with which the invention may be employed.

Fig. 4 is an axial section top view of a novel electron gun in accordance with the present invention.

Fig. 5 is a partial section top view of a first embodiment of the prefocusing lens of the present invention.

Fig. 6 is a section view of an electrode of the prefocusing lens of Fig. 5, taken along line 6-6.

Fig. 7 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens electrode of Fig. 5.

Figs. 8 and 9 are section views of the electron gun shown in Fig. 4, taken along lines 8-8 and 9-9.

Fig. 10 is a partial section top view of a second embodiment of the prefocusing lens of the present invention.

Fig. 11 is a section view of an electrode of the prefocusing lens of Fig. 10, taken along line 11-11.

Fig. 12 is a graph of the beam current density contour at the center of the screen for an electron gun

This is the replacement sheet

Date: - 1 JUL 1999

utilizing the prefocusing lens of Fig. 10.

Fig. 13 is a partial section top view of a third embodiment of the prefocusing lens of the present invention.

Fig. 14 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 13.

Fig. 15 is a partial section top view of a fourth embodiment of the prefocusing lens of the present invention.

Fig. 16 is a graph of the beam current density contour at the center of the screen for an electron gun utilizing the prefocusing lens of Fig. 15.

Fig. 17 is a section view of a prior embodiment of an electrode of the prefocusing lens.

Fig. 18 is a graph of the beam current density contour at the center of the screen for an electron gun using the prior prefocusing lens electrode of Fig. 17.

Fig. 1 shows a rectangular color picture tube 10 having a glass envelope 11 comprising a rectangular faceplate panel 12 and a tubular neck 14 connected by a rectangular funnel 16. The panel 12 comprises a viewing faceplate 18 and a peripheral flange or sidewall 20 which is sealed to the funnel 16 with a frit seal 21. A mosaic three-color phosphor screen 22 is located on the inner surface of the faceplate 18. The screen is preferably a line screen with the phosphor lines extending substantially perpendicular to the high frequency raster line scan of the tube (normal to the plane of Fig. 1). Alternatively, the screen could be a dot screen. A multiapertured color selection electrode or shadow mask 24 is removably mounted, by conventional means, in predetermined, spaced relation to the screen 22. An improved inline electron gun 26, shown schematically by dashed lines in Fig. 1, is centrally mounted within the neck 14 to generate and direct three

This is the replacement sheet

Date: 7 JUL 1960

electron beams 28, along coplanar convergent beam paths, through the mask 24 to the screen 22.

The tube of Fig. 1 is designed to be used with an external magnetic deflection yoke, such as the yoke 30, located in the neighborhood of the funnel-to-neck junction. When activated, the yoke 30 subjects the three beams 28 to magnetic fields which cause the beams to scan horizontally and vertically, in a rectangular raster, over the screen 22. The initial plane of deflection (at zero deflection) is shown by the line P-P in Fig. 1, at about the middle of the yoke 30. Because of fringe fields, the zone of deflection of the tube extends axially from the yoke 30 into the region of the gun 26. For simplicity, the actual curvature of the deflection beam paths in the deflection zone is not shown in Fig. 1.

The inline electron gun 26 includes six electrodes, G1 through G6, in addition to the cathodes, K. The gun may be of a first type 26', shown in Fig. 2, in which the G2 and G4 electrodes are interconnected and operated at a first potential, and the G3 and G5 electrodes are interconnected and operated at a second potential; or the gun may be of a second type 26'', shown in Fig. 3, in which the G3 and G5 electrodes are interconnected and operated at a third potential, and the G4 and G6 electrodes are interconnected and operated at a fourth potential. In each of the electron guns 26' and 26'', three electron lenses, L_1 , L_2 , and L_3 , are formed by the above-identified electrodes. The present invention relates primarily to the second or prefocusing lens, L_2 .

The details of a first embodiment of the novel electron gun 26' are shown in Figs. 4 through 9. With reference to Fig. 4, the gun 26' comprises three equally spaced coplanar cathodes 42 (one for each beam); a control grid 44 (G1); a screen grid 46 (G2); a third electrode 48 (G3); a fourth electrode 50 (G4); a fifth electrode 52 (G5), the G5 electrode including a portion 54 identified as element 54, for a purpose described below; and a sixth electrode 56 (G6). The electrodes are spaced

from the cathodes, in the order named, and are attached to a pair of support rods (not shown).

The G1 electrode 44, the G2 electrode 46 and a first portion 72 of the G3 electrode 48, facing the G2 electrode 46, comprise a beam-forming region of the electron gun 26' and form the first electron lens, L1. Another portion 74 of the G3 electrode 48, the G4 electrode 50 and the G5 electrode 52 comprise an asymmetric prefocusing or second electron lens, L2, one embodiment of which is shown in Fig. 5. The element (G5' electrode portion) 54 and the G6 electrode 56 comprise a third or main focusing lens L3.

Each cathode 42 comprises a cathode sleeve 58 closed at its forward end by a cap 60 having an end coating 62 of an electron emissive material thereon, as is known in the art. Each cathode 42 is indirectly heated by a heater coil (not shown) positioned within the sleeve 58.

The G1 and G2 electrodes, 44 and 46, are two closely spaced, substantially flat, plates each having three inline apertures, 64 and 66, respectively, therethrough. The apertures 64 and 66 are centered with the cathode coating 62 to initiate three equally-spaced coplanar electron beams 28 (shown in Fig. 1), which are directed towards the screen 22. Preferably, the initial electron beam paths are substantially parallel, with the middle path coinciding with the central axis, A-A, of the electron gun.

The G3 electrode 48 includes a substantially flat outer plate portion 68 having three inline apertures 70 therethrough, which are aligned with the apertures 66 and 64 in the G2 and G1 electrodes, 46 and 44, respectively. The G3 electrode 48 also includes a pair of cup-shaped first and second portions, 72 and 74, respectively, which are joined together at their open ends. The first portion 72 has three inline apertures 76, formed through the bottom of the cup, which are aligned with the apertures 70 in the plate 68. The second portion 74 of the G3 electrode has three apertures 78 formed through its bottom, which are aligned with the apertures 76 in the first portion 72.

This is the replacement sheet

Date: - 1 JUL 1999

Extrusions 79 surround the apertures 78. Alternatively, the plate portion 68, with its inline apertures 70, may be formed as an internal part of the first portion 72.

As shown in Fig. 5, the G4 electrode 50 comprises a plate having identically-shaped recesses 51a and 51b formed in the opposed major surfaces thereof. Three inline apertures 80 are formed through the body of the electrode 50, within the recesses 51a and 51b, and aligned with the apertures 78 in the G3 electrode 48.

Again with respect to Fig. 4, the G5 electrode 52 is a deep-drawn, cup-shaped member having three apertures 82, surrounded by extrusions 83, formed in the bottom end thereof. A substantially flat plate member 84, having three apertures 86, aligned with the apertures 82, is attached to and closes the open end of the G5 electrode 52. A first plate portion 88, having a plurality of openings 90 therein, is attached to the opposite surface of the plate member 84.

The G5' electrode portion 54 comprises a deep-drawn, cup-shaped member having a recess 92 formed in the bottom end thereto, with three inline apertures 94 extending therethrough. Extrusions 95 surround the apertures 94. The opposite open end of the G5' electrode portion 54 is closed by a second plate portion 96 having three openings 98 formed therethrough. The openings 98 are aligned and cooperate with the openings 90, in the first plate portion 88, in a manner described below.

The G6 electrode 56 is a cup-shaped, deep-drawn member having a large opening 100 at one end through which all three electron beams pass, and an open end which is attached to and closed by a plate member 102 that has three apertures 104 therethrough which are aligned with the apertures 94 in the G5' electrode portion 54. Extrusions 105 surround the apertures 104.

The shape of the recess 51b, formed in the G4 electrode 50, is shown in Fig. 6. The recesses 51a and 51b have a uniform vertical height at each of the apertures 80 and have rounded ends. Such a shape has been referred to

as the "race-track" shape. The recess 92, formed in the bottom end of the G5' electrode portion 54, is also race-track shaped, but it differs dimensionally from the recesses 51a and 51b in the G4 electrode 50 as described below.

The shape of the large opening 100 in the G6 electrode 54 is shown in Fig. 8. The opening 100 is vertically higher at the outside apertures 104 than it is at the center aperture. Such a shape has been referred to as the "dog-bone" or "barbell" shape.

With respect to Fig. 4, the first plate portion 88 of the G5 electrode 52 faces the second plate portion 96 of the G5' electrode portion 54. The apertures 90 in the first plate portion 88 have extrusions extending from the plate portion that have been divided into two segments, 106 and 108, for each aperture. The apertures 98 in the second plate portion 96 of the G5' electrode portion 54 also have extrusions extending from the plate portion 96 that have been divided into two segments, 110 and 112, for each aperture. As shown in Fig. 9, the segments 106 and 108 are interleaved with the segments 110 and 112. These segments are used to create quadrupole lenses in the paths of each electron beam when different potentials are applied to the G5 and G5' electrode and electrode portion 52 and 54, respectively. By proper application of a dynamic voltage differential to either the G5 electrode 52 or the G5' electrode portion 54, it is possible to use the quadrupole lenses established by the segments 106, 108, 110 and 112 to provide an astigmatic correction to the electron beams, which compensates for astigmatism occurring in either the electron gun or the deflection yoke. Such a quadrupole lens structure is described in U.S. Pat. No. 4,731,563, issued to Bloom et al. on March 15, 1988.

The novel second lens, L2, of the present invention does not require the use of a quadrupole lens formed by the above-described G5 and G5' electrode and electrode portion, 52 and 54, respectively. A unitized G5 electrode, fabricated by

eliminating the first and second plate portions 88 and 96 and attaching together the open ends of elements 52 and 54, may be used; however, such a gun structure would not provide an optimized deflected electron beam shape, although it might be useful where a tradeoff between performance and cost is permissible.

Specific dimensions of a computer modeled electron gun for the first preferred embodiment are presented in TABLE I.

TABLE I

	inches	mm
K-G1 spacing	0.003	0.08
Thickness of G1 electrode 44	0.004	0.10
Thickness of G2 electrode 46	0.028	0.71
G1 and G2 aperture diameter	0.025	0.64
G1 to G1 spacing	0.008	0.20
G2 to G3 spacing	0.030	0.76
Thickness of G3 plate portion 68	0.010	0.25
Diameter of G3 apertures 70	0.045	1.14
Diameter of G3 apertures 78	0.148	3.76
Length of G3 electrode 48	0.200	5.08
G3 to G4 spacing	0.050	1.27
Thickness of active area of G4 electrode 50	0.025	0.64
Diameter of G4 aperture 80	0.158	4.01
Horizontal width of recesses 51a and 51b	0.785	19.94
Vertical height of recesses 51a and 51b	0.239	6.07
Depth of recesses 51a and 51b	0.030	0.76
G4 to G5 spacing	0.050	1.27
Overall length of G5 electrode 52 and G5' electrode portion 54	0.970	24.64
Spacing between plate portions 88 and 96	0.040	1.02
Horizontal width of recess 92	0.755	19.18
Vertical height of recess 92	0.326	8.28
Depth of recess 92	0.115	2.92
Diameter of apertures 82, 90, 98	0.158	4.01

This is the replacement sheet

Date: - 1 JUL 1999

TABLE I Cont

	inches	mm
Aperture-to-aperture spacing K to G5 bottom	0.260	6.60
Diameter of G5' aperture 94 (center)	0.160	4.06
Diameter of G5' apertures 94 (outer)	0.180	4.57
G5' to G6 spacing	0.050	1.27
Length of G6 electrode 56	0.150	3.81
Horizontal width of opening 100	0.742	18.85
Maximum height of opening 100	0.295	7.49
Minimum height of opening 100	0.289	7.34
Depth of opening 100	0.135	3.43
Diameter of G6 aperture 105 (center)	0.160	4.06
Diameter of G6 apertures 105 (outer)	0.180	4.57
Aperture-to-aperture spacing G5'top/G6	0.245	6.22
Length of G3 extrusions 79	0.045	1.14
Length of G5 extrusions 83	0.045	1.14
Length of G5' extrusions 95	0.034	0.86
Length of G6 extrusions 105	0.045	1.14

In the embodiment presented in TABLE I, the electron gun is electrically connected as shown in Fig. 2.

Typically, the cathode operates at about 150V, the G1 electrode at ground potential, the G2 and G4 electrodes are electrically interconnected and operate within the range of about 300V to 1000V, the G3 and G5 electrodes also are electrically interconnected and operate at about 7650V, and the G6 electrode operates at an anode potential of about 25KV.

In the electron gun 26', the first lens, L1 (Fig. 2), provides a symmetrically-shaped, high quality electron beam into the second lens, L2. The first lens, L1, comprises the beam forming region of the gun and includes the G1 electrode 44, the G2 electrode 46, and the first portion of the G3 electrode 48 adjacent the G2 electrode.

The second lens, L2, is the novel asymmetric prefocusing lens and comprises the G4 electrode 50 and

the adjacent portions of the G3 electrode 48 and the G5 electrode 52. In the first embodiment, the identical pair of recesses, 51a and 51b, are formed in the opposed, major, active surfaces of the G4 electrode 50 (see, e.g., Figs. 5 and 6). While the recesses are preferably race-track shaped, other shapes, e.g., rectangular, which produce the effect described below may be used.

The active, facing surfaces of the G3 and G5 electrodes, 48 and 52, respectively, are substantially flat. The combination of the above-described active elements produces quadrupole fields which form the asymmetric or astigmatic prefocusing lens which provides a horizontally-elongated electron beam (not shown) into the third or main focusing lens, L3. By providing the astigmatic focusing correction in the prefocusing lens, L2, beyond the electron beam cross-over point which occurs within the first lens, L1, the effectiveness of each quadrupole field is substantially independent of changes in the beam current. Additionally, the race-track-shaped recesses, 51a and 51b, provide a preconverging action which eliminates misconvergence of the outer beams at the screen, due to changes in the focus voltage, by providing a compensating change in the strength of the prefocusing lens, L2.

While the invention is described in terms of two recesses, it is possible to achieve the same results by forming only one recess in either surface of the G4 electrode 50. The single recess would have a greater depth than either of the recesses 51a or 51b, and the lateral dimensions, i.e., vertical height and horizontal width, would be less than those of either of the recesses, to provide equivalent asymmetric and convergence corrections to the beams. The dimensions of the single recess would depend upon the extent of beam corrections required.

The main focusing lens, L3, formed between the G5' electrode portion 54 and the G6 electrode 56, also is an asymmetric lens, having low aberration, which provides a vertically elongated, or asymmetrically-shaped, electron beam spot at

the center of the screen. The spacing between adjacent apertures 94 in the G5' electrode portion 54 and the apertures 104 in the G6 electrode 56 is 6.22mm, rather than the 6.60mm aperture-to-aperture spacing that exists from the cathodes to the apertures 82 in the bottom G5 electrode 52. This reduced main lens aperture-to-aperture spacing ensures that the preconverged outer beams pass through low-aberration regions of the main lens, L3, to minimize coma distortions. A graph of a computer simulation of the electron beam spot at the center of the screen of a 27V110⁰ tube, operated at a cathode drive voltage of 103.2V, a G3/G5 focus voltage of 7650V, an ultor voltage of 25kV and 4mA beam current, is shown in Fig. 7. The beam spot is elliptically-shaped along the vertical axis to reduce the overfocusing action of the yoke when the beam is deflected. The undeflected, center beam spot includes a substantially rectangularly-shaped 90% peak beam current density portion, which is circumscribed by larger elliptically-shaped 50% and 5% peak beam current density portions. The size of the 5% peak beam current density spot is about 2.5mm x 4.2mm (HxV). With the width of the G4 recesses 51a and 51b as specified in TABLE I, and the overall length of the gun from the G3 bottom to the top of the G5' electrode portion adjusted to 35.05mm, the focus voltage is kept below 7700V, and the misconvergence of the outer beam is reduced to substantially zero.

By utilizing the multipole lens described with respect to Fig. 4, and applying to the G5' electrode portion 54 a dynamic differential focus voltage that ranges from the potential on the G5 electrode 52, with no deflection, to about 1000 volts more positive at maximum deflection, the beam current density spot size can be optimized when the beams are deflected to the periphery of the screen. This mode of operation is discussed in U.S. Pat. No. 4,764,704, issued to New et al. on Aug. 16, 1988.

A second embodiment of the present invention is obtained by increasing the length of the G3 electrode 148

This is the replacement sheet

Date: - 1 JUL 1999

to 5.84mm, from the value of 5.08mm shown in TABLE I, and modifying the asymmetric prefocusing lens, L2, as shown in Fig. 10. In the second embodiment of the lens L2, the G4 electrode 150 comprises a substantially flat plate having a thickness of about 0.025 inch (0.64mm), with circular apertures 180 formed through the oppositely disposed, active, major surfaces thereof. The active surfaces of the facing G3 and G5 electrodes, 148 and 152, respectively, have rectangular slots enclosing the electron beam apertures. As shown in Fig. 11, each of the slots 149, in the G3 electrode 148, has a slot width, W, of 5.82mm, and a slot height, H, of 10.16mm. Also, each of the slots 149 has a depth, d, of 0.76mm, shown in Fig. 10. The slot-to-slot spacing, S, shown in Fig. 11, is 7.11mm. Inasmuch as the aperture-to-aperture spacing, s, within the prefocusing lens, L2, is 6.60mm, and the slot-to-slot spacing, S, is 7.11mm, it can be seen, in Fig. 11, that the two outer slots 149 in the G3 electrode 148 are displaced outwardly relative to the outer apertures 178 formed therein. This displacement of the slots 149 in the G3 electrode, and a similar displacement of the identically-dimensioned slots 153 in the G5 electrode 152, cooperate to form an asymmetric prefocusing lens, L2, which provides a horizontally-elongated electron beam (not shown) into the third lens, L3. The novel slot configuration in the G3 and G5 electrodes 148 and 152, respectively, also provides a preconverging action to eliminate misconvergence of the outer beams at the screen, in a manner similar to that described for the first embodiment. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 12. When operated at an ultor voltage of 25kV and 4mA beam current in a 27V110⁰ tube, the beam sizes at 90% and 50% peak current density are comparable to those of the first embodiment, shown in Fig. 7, and the beam size at 5% peak current density is about 2.26mm x 3.68mm (HxV), at a cathode drive voltage of 103.2V and a G3/G5 focus voltage of 7650V. All other gun parameters are as listed in TABLE I.

This is the replacement sheet

Date: - 1 JUL 1999

Equivalent performance can be achieved by forming the slots in only one of the active surfaces, i.e., in either the G3 electrode 148 or the G5 electrode 152. Slots formed in only one active surface must be deeper than the slots described above, and the small dimension of each slot must be reduced, while the amount of outer slot offset must be increased.

A third embodiment of the present invention is achieved by modifying the electron gun to provide the electrical configuration shown in Fig. 3. The asymmetric prefocusing lens, L2, of the gun 26" is shown in Fig. 13. The length of the G3 electrode 248 is maintained at 5.84mm, the same dimension utilized in the second embodiment, and a race-track-shaped recess 249 is formed in the active, major surface of the G3 electrode facing the G4 electrode 250. The recess 249 has a horizontal width of 19.43mm, a vertical height of 5.84mm and a depth of 0.76 mm. An identically-shaped and dimensioned race-track recess 253 is formed in the active surface of the G5 electrode 252, facing the substantially flat G4 electrode 250. While the race-track shape is preferred, other geometric shapes which provide an asymmetric lens with a preconvergence correction may be used. In the third embodiment, the G4 electrode 250 has a thickness of about 0.64mm, with circular apertures 280 formed therethrough. The asymmetric prefocusing lens, L2, of the third embodiment provides the preconverging action, and forms horizontally-elongated electron beams (not shown), as previously described, into the third lens, L3. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 14. When operated at an ultor/G4 voltage of 25kV and 4mA beam current in a 27V110° tube, the beam size and shape at 90% peak beam current density is larger and more elliptical than in the first and second embodiments, while at 50% peak beam current density the elliptically-shaped spot is more vertically elongated than in the first two embodiments.

At 5% peak beam current density, the beam spot size is about 1.94mm x 3.44mm (HxV). The cathode drive voltage in this embodiment is 103.2V, the G3/G5 focus voltage is 7650V and the G2 voltage is typically about 400V. All other gun parameters are as listed in TABLE I.

As described above, a single recess can be formed in either the active surface of the G3 or G5 electrodes, 248 or 252, respectively, if the depth is increased and the lateral dimensions are suitably reduced to provide equivalent performance.

A fourth embodiment of the asymmetric prefocusing lens, L2, is shown in Fig. 15. The length of the G3 electrode 348 is 5.08mm, and the active surface facing the G4 electrode 350 is substantially flat, with three circular apertures 378 formed therethrough. The apertures 378 have a diameter of 4.01mm. The G4 electrode 350 has rectangular slots 350a and 350b formed in the opposed major active surfaces thereof, with the slots 350a facing the G3 electrode 348 and the slots 350b facing the G5 electrode 352. Each of the slots 350a and 350b has a width of 5.79mm, a height of 10.16mm and a depth of 0.76mm. The slot-to-slot spacing is 7.01mm. The circular apertures 380, formed through the G4 electrode 350, have a diameter of 4.01mm and are enclosed within the rectangular slots 350a and 350b, in the same manner as discussed with respect to the slots shown in Fig. 11. The active major surface of the G5 electrode 352 facing the G4 electrode 350 also is substantially flat, with three circular apertures 382 formed therethrough. The apertures 382 also have a diameter of 4.01mm.

Inasmuch as the aperture-to-aperture spacing within the prefocusing lens, L2, is 6.60mm and the slot-to-slot spacing of the slots 350a and 350b of the G4 electrode 350 is 7.01mm, the two outer slots are displaced outwardly relative to the outer apertures 380 formed within the slots. The configuration and displacement of the G4 slots form an asymmetric lens which provides the preconverging action and horizontally-elongated electron beams (not

This is the replacement sheet

Date: - 1 JUL 1999

shown), as previously described, into the third lens, L3. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 16. The beam spot shape is similar to that shown in Fig. 14. When operated at an ultor/G4 voltage of 25kV and 4mA beam current in a 27V110⁰ tube, the beam size at 5% peak beam current density is about 1.96mm x 3.49mm (HxV), at a cathode drive voltage of 103.2V and a G3/G5 focus voltage of 7700V. The G2 voltage in this embodiment is typically about 400V. All other gun parameters are as listed in TABLE I.

Alternatively, slots can be formed in only one of the active surfaces of the G4 electrode 350. The depth of the slots must be increased, and the small dimension of each slot must be decreased, from the respective dimensions described immediately above. Additionally, the amount of offset of the outer slots must be increased to obtain performance equivalent to that of the fourth embodiment.

The novel electron gun of the present invention is to be contrasted to an electron gun of the type described in U.S. Pat. No. 4,764,704, referenced above. In that patent, a G4 electrode, similar to the G4 electrode 450 of the prefocusing, or second, lens shown in Fig. 17 herein, has rectangularly-shaped apertures 480 therethrough. Specific dimensions of a computer model of an embodiment of that prior electron gun are presented in TABLE II. That embodiment has the electrical configuration shown in Fig. 2 herein, and is similar in construction to the electron gun shown in Fig. 4 herein, with similar gun elements being identified with corresponding numbers, prefixed by the number "4".

TABLE II

	inches	mm
K-G1 spacing	0.003	0.08
Thickness of G1 electrode 444	0.004	0.10
Thickness of G2 electrode 446	0.028	0.71
G1 and G1 aperture diameters	0.025	0.64
G1 to G2 spacing	0.008	0.20
G2 to G3 spacing	0.030	0.76
Thickness of G3 bottom plate 468	0.010	0.25
Diameter of G3 aperture 470, center	0.045	1.14
Diameter of G3 apertures 470, outer	0.052	1.32
Diameter of G3 apertures 478	0.148	3.76
Length of G3 electrode 448	0.200	5.08
G3 to G4 spacing	0.500	1.27
Thickness of G4 electrode 450	0.025	0.64
Dimensions of G4 electrode apertures 480	0.158V X	4.01V X
	0.172H	4.37H
G4 to G5 spacing	0.050	1.27
Length of G5 electrode * 452-454	0.830	21.08
Diameter of apertures 482	0.158	4.01
Diameter of aperture 494 (center)	0.160	4.06
Diameter of apertures 494 (outer)	0.180	4.57
Horizontal width of recess 492	0.755	19.18
Vertical height of recess 492	0.326	8.28
Depth of recess 492	0.115	2.29
Aperture-to-aperture spacing K to G5 bottom **	0.260	6.60
G5 to G6 spacing	0.050	1.27
Length of G6 electrode	0.150	3.81
Horizontal width of opening 400	0.742	18.85
Maximum height of opening 400	0.295	7.49
Minimum height of opening 400	0.289	7.34
Depth of opening 400	0.135	3.43
Diameter of aperture 404 (center)	0.160	4.06
Diameter of apertures 404 (outer)	0.180	4.57
Aperture-to-aperture spacing G5 top/G6	0.245	6.22
Length of G3 extrusions 479	0.045	1.14
Length of G5 extrusions 483	0.045	1.14

There is a rectangular slot

1.14 1.14 1.14

TABLE II Cont

	inches	mm
Length of G5 extrusions 495	0.034	0.86
Length of G6 extrusions 405	0.045	1.14
* unitized electrode, no multipole lens		
** the aperture-to-aperture spacing of the G3 bottom apertures 470 is increased to 0.2635 inch (6.69mm) to eliminate any displacement of the outer electron beams with changes in the focus voltage.		

In the prior electron gun described in TABLE II, the cathode operates at a drive voltage of about 103.2V, the G1 electrode is at ground potential, the G2 and G4 are electrically interconnected and operate within the range of 300V to 1000V, the G3 and G5 electrodes also are interconnected and operate at about 6600V, and the G6 electrode operates at an anode potential of about 25kV. The prefocusing lens, L2, of the prior electron gun, with the rectangular apertures 480 formed through the substantially flat G4 electrode 450, provides a horizontally-elongated electron beam (not shown) into the main focusing lens, L3. A computer simulation of the resultant vertically-elongated beam spot at the center of the screen is graphically shown in Fig. 18. The beam size at 5% peak current density is about 2.30mm x 3.49mm (HxV) at the previously described operating parameters.

CONCLUSION

The performance of the present prefocusing lens, L2, of embodiments 1 through 4, as measured by the resultant electron beam spot size on the screen, is comparable to that of the prior electron gun described in U.S. Pat. No. 4,764,704, which utilizes a prefocusing lens having rectangularly-shaped apertures in the G4 electrode thereof. A comparison of results is contained in TABLE III.

This is the replacement sheet

Date: - 1 JUL 1999

TABLE III

<u>EMBODIMENT</u>	<u>Beam Spot Size on Screen</u>	
	<u>Horizontal (mm)</u>	<u>Vertical (mm)</u>
1	2.50	4.20
2	2.26	3.68
3	1.94	3.44
4	1.96	3.49
Prior	2.30	3.49

The four embodiments of the present electron gun structure provide ease of manufacturing, because the use of circular apertures throughout the electron gun reduce the misalignment problems posed by the rectangularly-shaped G4 apertures of the prior gun. Additionally, the prior gun requires a slight increase in the G3 aperture-to-aperture spacing (from 6.60mm to 6.69mm) to eliminate the misconvergence of the outer electron beams with changes in focus voltage. The present device achieves comparable performance by controlling either the horizontal width of the race-track-shaped recesses within the prefocusing lens, L2, in embodiments 1 and 3, or the slot-to-slot spacing of the rectangular slots formed within prefocusing lens, L2, in embodiments 2 and 4. In each of the four embodiments, the aperture-to-aperture spacing from the cathode 42 to the bottom of the G5 electrode 52 is maintained at a constant value of 6.60mm, thereby simplifying the assembly and alignment of the gun components.

This is the replacement sheet

Date: 1 JUL 1999

Claims :-

1. A color cathode-ray tube including an envelope having therein an inline electron gun for generating and directing three inline electron beams, a center beam and two outer beams, along initially coplanar beam paths toward a screen on an interior portion of said envelope, said gun having six electrodes which form a beam-forming region, a prefocusing lens and a main focusing lens, said prefocusing lens including four active surfaces, at least one of which has one or more recesses formed therein; characterized in that said active surfaces provide quadrupole fields which provide astigmatic prefocusing, and said one or more recesses (51a, 51b; 149, 153; 249, 253; 350a, 350b) provide a preconverging action on said outer electron beams, three circular apertures (80; 178; 182; 278, 282; 380) being provided within said one or more recesses.

2. The tube as described in claim 1, wherein said beam-forming region includes a first electrode, a second electrode and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens; characterized in that said fourth electrode (50; 350) has substantially identical asymmetric beam-focusing recesses (51a, 51b; 350a, 350b) formed in the oppositely disposed active surfaces thereof, three separate inline circular apertures (80; 380) being disposed within each of said recesses.

3. The tube as described in claim 2, characterized in that a single recess (51a, 51b) is formed in each active surface of said fourth electrode (50).

4. The tube as described in claim 2, characterized in that three separate, substantially rectangular recesses (350a, 350b), comprising two outer recesses and a center recess, are formed in each active surface of said fourth electrode (350).



5. The tube as described in claim 4, characterized in that each of said outer recesses (350a, 350b) has an outer aperture (380) therethrough and is displaced outwardly relative to said outer aperture.

6. The tube as described in claim 1, wherein said beam-forming region includes a first electrode, a second electrode and a first portion of a third electrode for providing substantially symmetrically-shaped beams to said prefocusing lens, said prefocusing lens comprises a second portion of said third electrode, a fourth electrode and a first portion of a fifth electrode and provides asymmetrically-shaped beams to said main focusing lens, and said main focusing lens comprises a second portion of said fifth electrode and a sixth electrode and is a low aberration lens; characterized in that said second portion of said third electrode (148; 248) and said first portion of said fifth electrode (152; 252) have substantially identical, asymmetric beam-focusing recesses (149, 153; 249, 253) formed in the active surfaces thereof, three separate inline circular apertures (178, 182; 278, 282) being disposed within each of said recesses.

7. The tube as described in claim 6, characterized in that a single recess (249, 253) is formed in each of said second portion of said third electrode (248) and said first portion of said fifth electrode (252).

8. The tube as described in claim 6, characterized in that three separate, substantially rectangular recesses (149, 153), comprising two outer recesses and a center recess, are formed in said active surfaces of said second portion of said third electrode (148) and of said first portion of said fifth electrode (152).

9. The tube as described in claim 8, characterized in that each of said outer recesses (149, 153) has a circular aperture (178, 182) therethrough, said outer recesses being displaced outwardly relative to the outer circular apertures.



* C L M S *

This is the reproduction of the original document.

DATE - 1 JUL 1999

COLOR PICTURE TUBE HAVING AN INLINE ELECTRON GUN WITH AN
ASTIGMATIC PREFOCUSING LENS

ABSTRACT

An improved color picture tube includes an inline electron gun (26) for generating and directing three inline electron beams (28) along coplanar beam paths toward a screen (22). The gun includes a plurality of electrodes (44,46, 48,50,52,56) which form a beam-forming region (L1), a prefocusing lens (L2), and a main focusing lens (L3) for the electron beams. The improvement resides within the prefocusing lens, which includes four active surfaces. At least one of the active surfaces has asymmetric prefocusing recesses formed therein. (Figure 4)

This is the replacement sheet

Date: - 1 JUL 1999