

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 October 2009 (29.10.2009)

PCT

(10) International Publication Number
WO 2009/131889 A9(51) International Patent Classification:
H01L 21/324 (2006.01) *H01L 21/205* (2006.01)(21) International Application Number:
PCT/US2009/040809(22) International Filing Date:
16 April 2009 (16.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/107,281 22 April 2008 (22.04.2008) US(71) Applicant (for all designated States except US): **APPLIED MATERIALS, INC.** [US/US]; P.O. Box 450a, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LUBOMIRSKY, Dmitry** [IL/US]; 10540 Felton Way, Cupertino, CA 95014 (US). **RASHEED, Muhammad, M.** [US/US]; 4068 Twin Peaks, Fremont, CA 94538 (US). **YIEH, Elie, Y.** [US/US]; 5888 Pistoia Way, San Jose, CA 95138 (US).(74) Agents: **BERNARD, Eugene** et al.; Townsend and Townsend and Crew LLP, 1400 Wewatta, Suite 600, Denver, CO 80202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR EXCIMER CURING

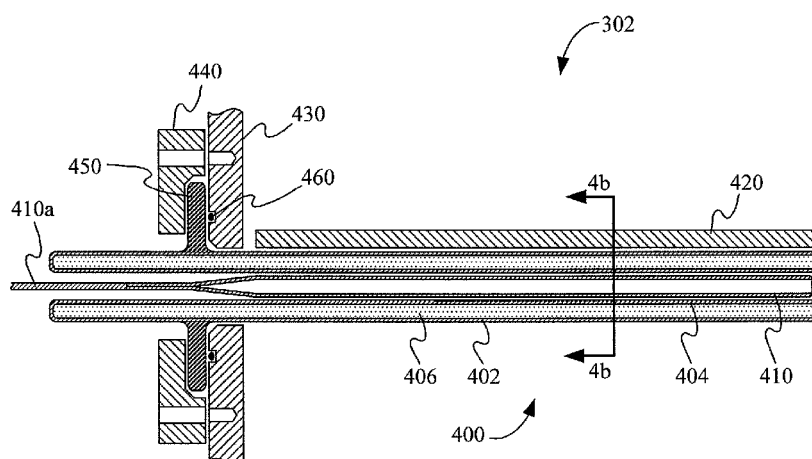


Fig. 4a

(57) Abstract: An apparatus for generating excimer radiation is provided. The apparatus includes a housing having a housing wall. An electrode is configured within the housing. A tubular body is around the electrode. The tubular body includes an outer wall and an inner wall. At least one inert gas is between the outer wall and the inner wall, wherein the housing wall and the electrode are configured to excite the inert gas to illuminate an excimer light for curing.



Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

(15) Information about Correction:

see Notice of 30 December 2009

(48) Date of publication of this corrected version:

30 December 2009