

FIG. 1

Send a currently available first radio capability identifier of a terminal device to a network node in a case that a network node change-related condition is satisfied

201

FIG. 2

Send a third radio capability identifier to a terminal device in a case that the terminal device supports RACS and a second network node does not support RACS

301

FIG. 3

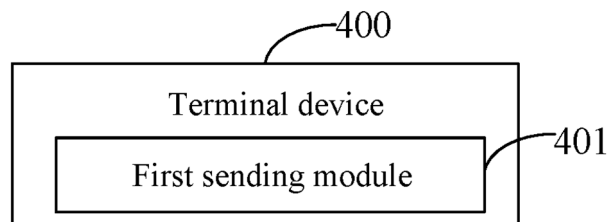


FIG. 4

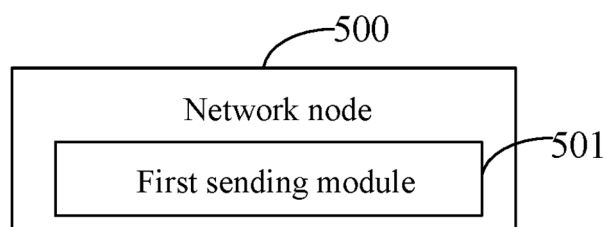


FIG. 5

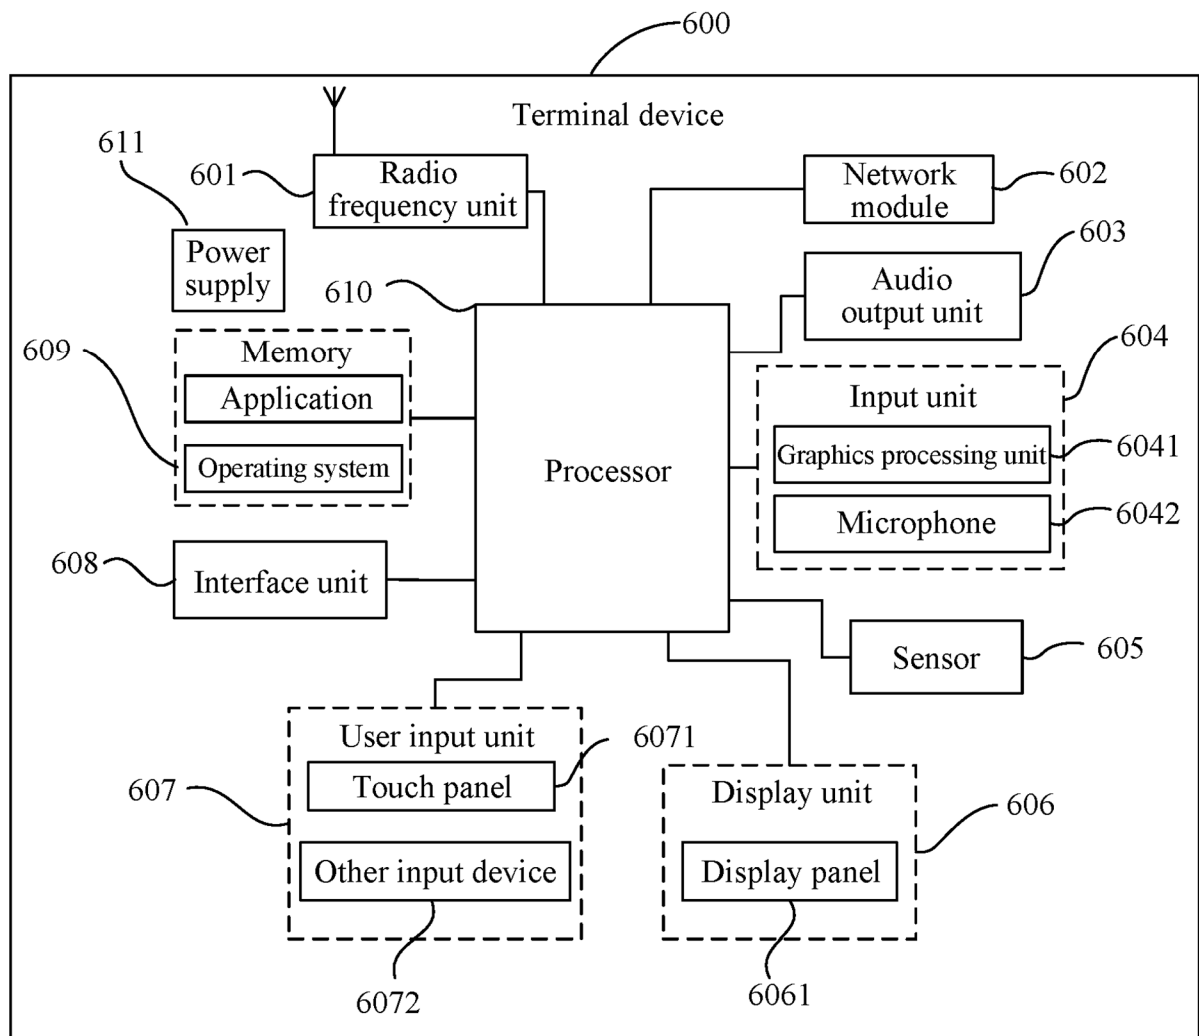


FIG. 6

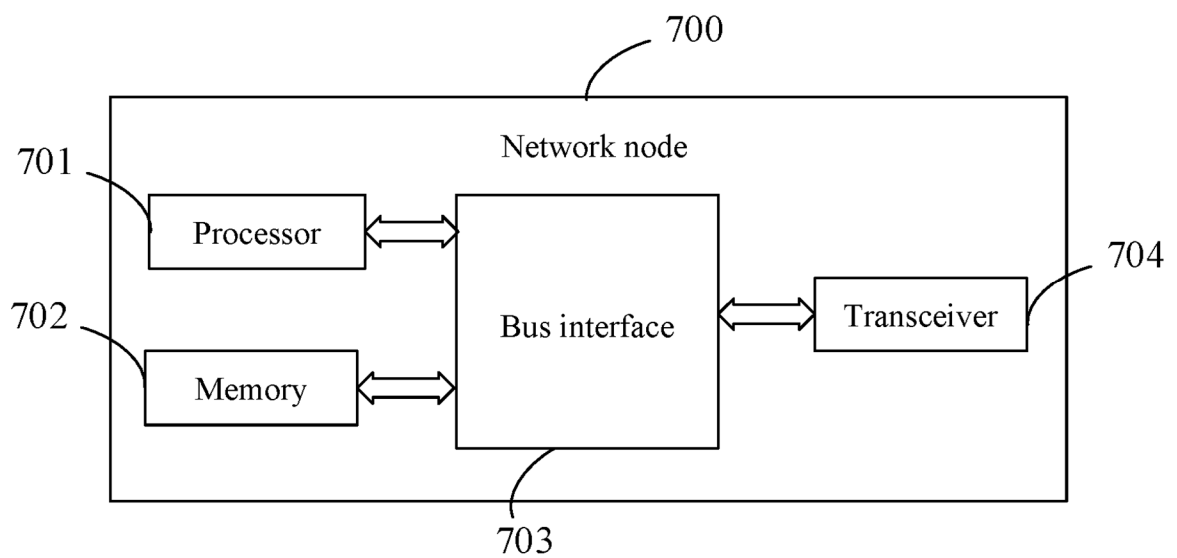


FIG. 7