



- (51) **International Patent Classification:**  
*H04B 7/04* (2006.01) *H04L 1/00* (2006.01)
- (21) **International Application Number:**  
PCT/CN2011/072332
- (22) **International Filing Date:**  
31 March 2011 (31.03.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant** (for all designated States except US):  
**PANASONIC CORPORATION** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **TONG, Hui** [CN/CN]; Panasonic Research & Development Center China Co., Ltd., 18th Floor, Zhongguancun Tower, No.27 Zhongguancun Street, Haidian District, Beijing 100080 (CN). **XU, Ming** [CN/CN]; Panasonic Research & Development Center China Co., Ltd., 18th Floor, Zhongguancun Tower, No.27 Zhongguancun Street, Haidian District, Beijing 100080 (CN). **HOSHINO, Masayuki** [JP/JP]; Panasonic Corporation, 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). **IMAMURA, Daichi** [JP/JP]; Panasonic Corporation, 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (74) **Agent:** **LIU, SHEN & ASSOCIATES**; A0601, Huibin Building, No.8 Beichen Dong Street, Chaoyang District, Beijing 100101 (CN).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report (Art. 21(3))

(54) **Title:** METHOD OF FEEDING BACK MU-CQI IN A COMMUNICATION SYSTEM, TRANSMISSION POINT DEVICE, AND USER EQUIPMENT

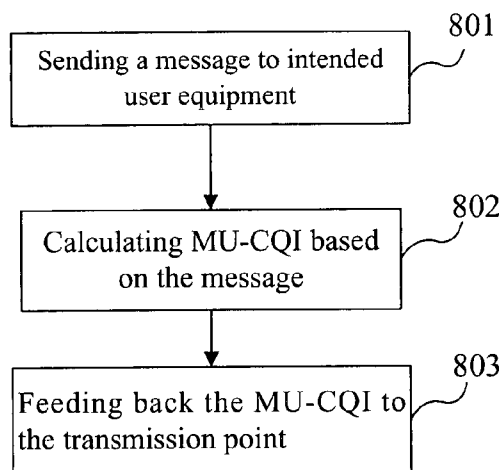


**Fig. 8**

(57) **Abstract:** There are provided a method, user equipment, and transmission point device for feeding back channel quality indicator (MU-CQI) to the transmission point in a communication system including the transmission point and a plurality of user equipments, the method comprising steps: the transmission point sending a message to an intended user equipment of the plurality of user equipments; and the intended user equipment calculating the MU-CQI based on the message, and feeding back the MU-CQI to the transmission point. The present disclosure enables dynamic MU operation, and improves link adaptation performance with marginal downlink overhead. And the accuracy is not limited by codebook size.