

FIG. 1

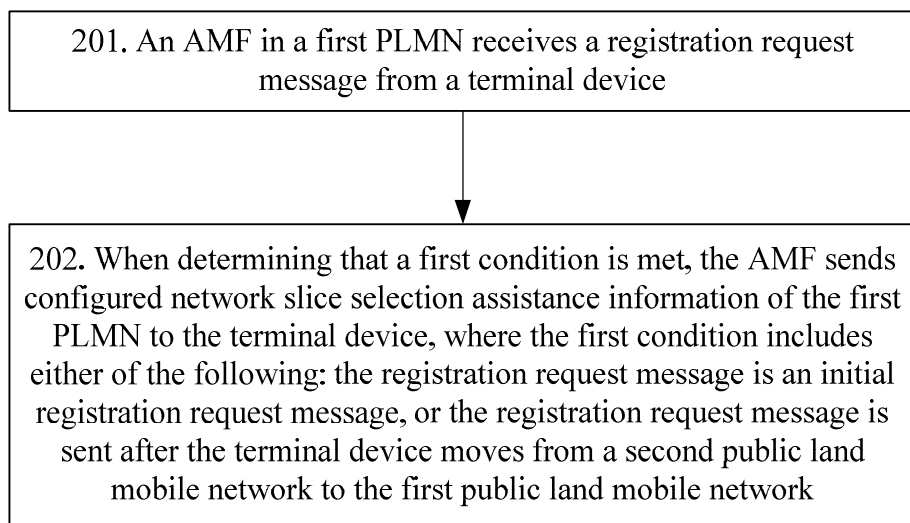


FIG. 2

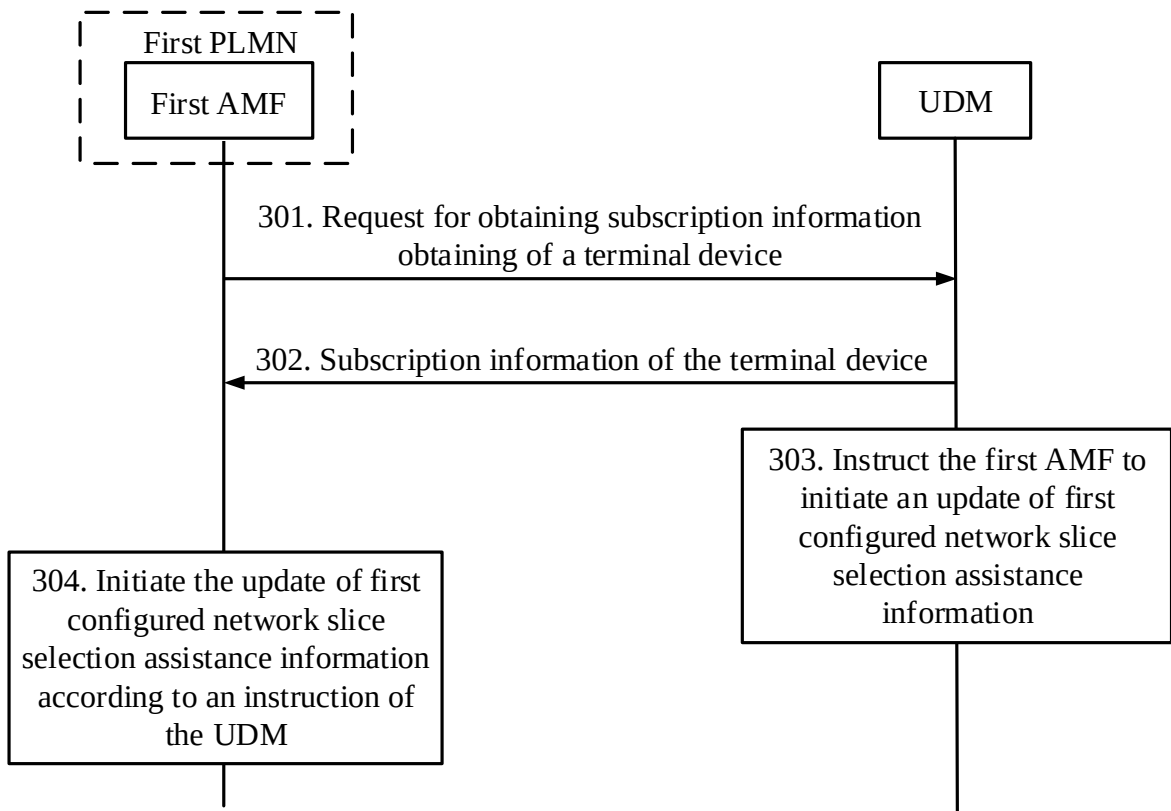


FIG. 3

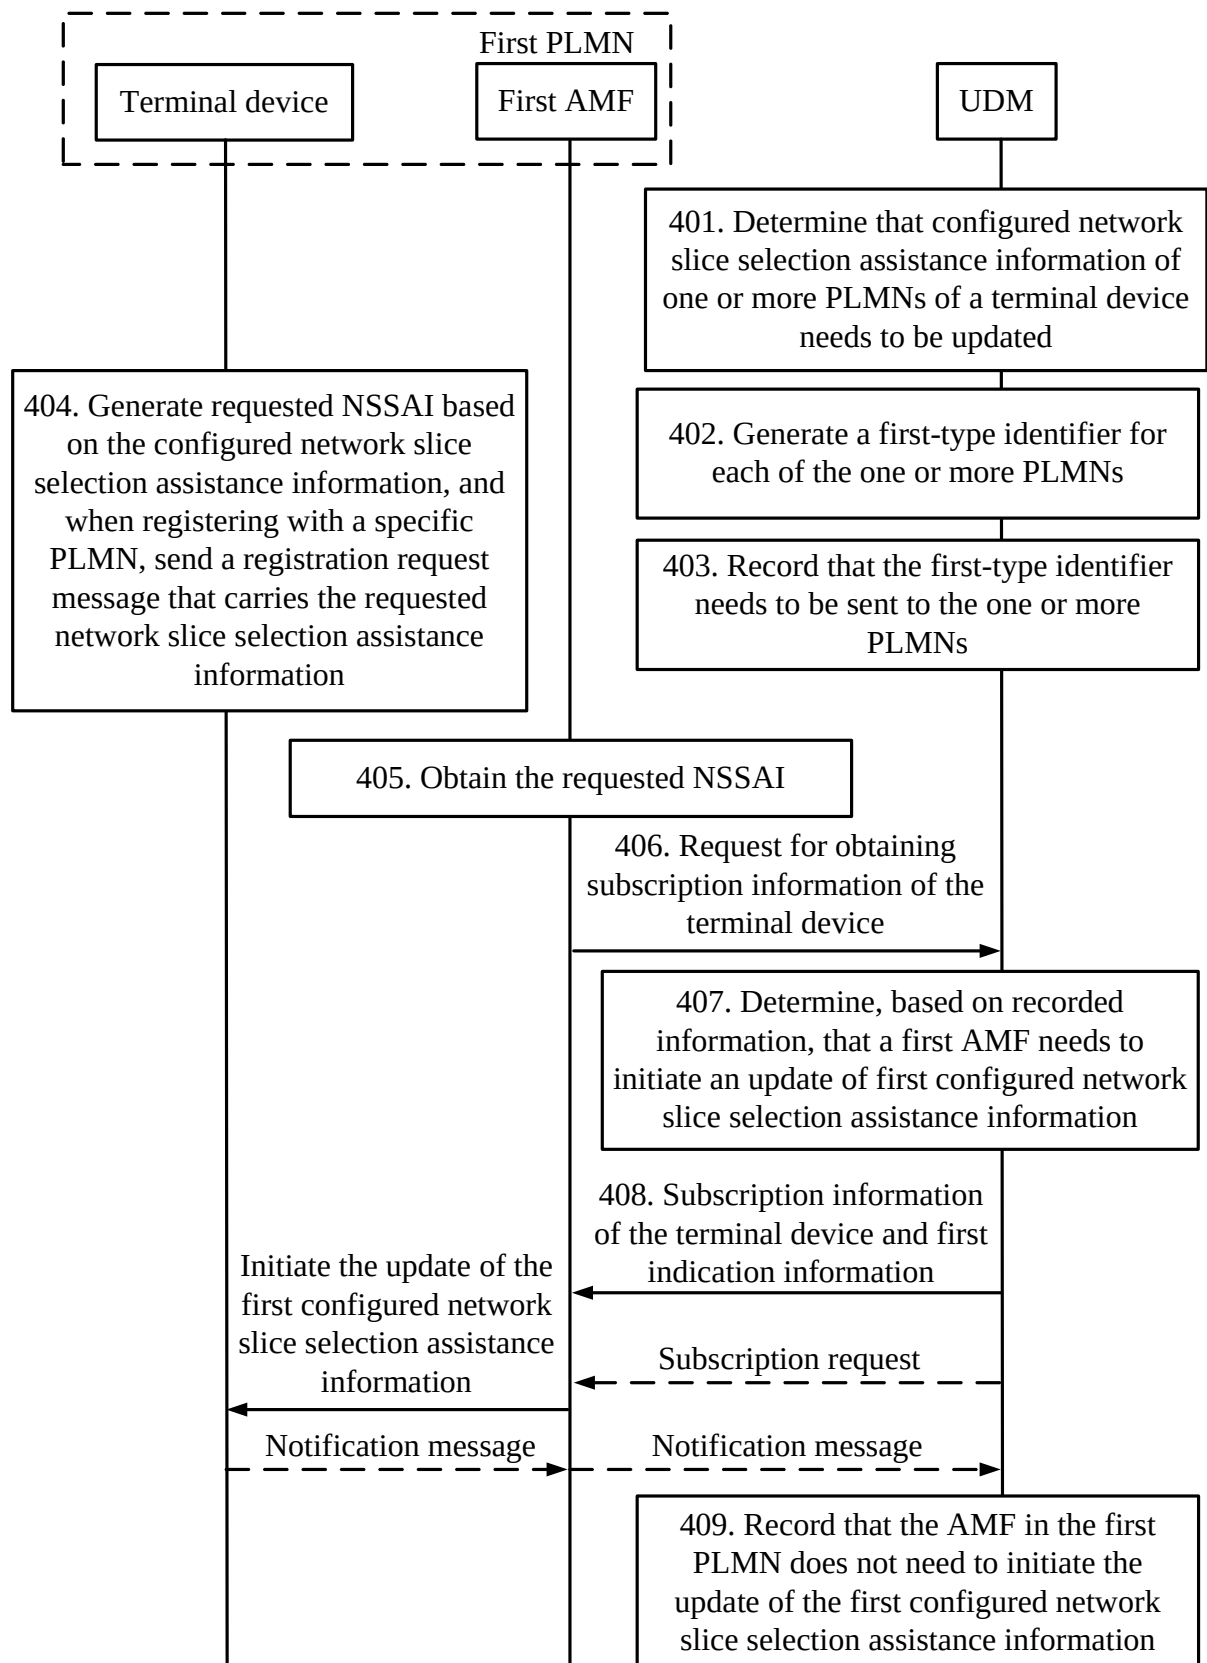


FIG. 4

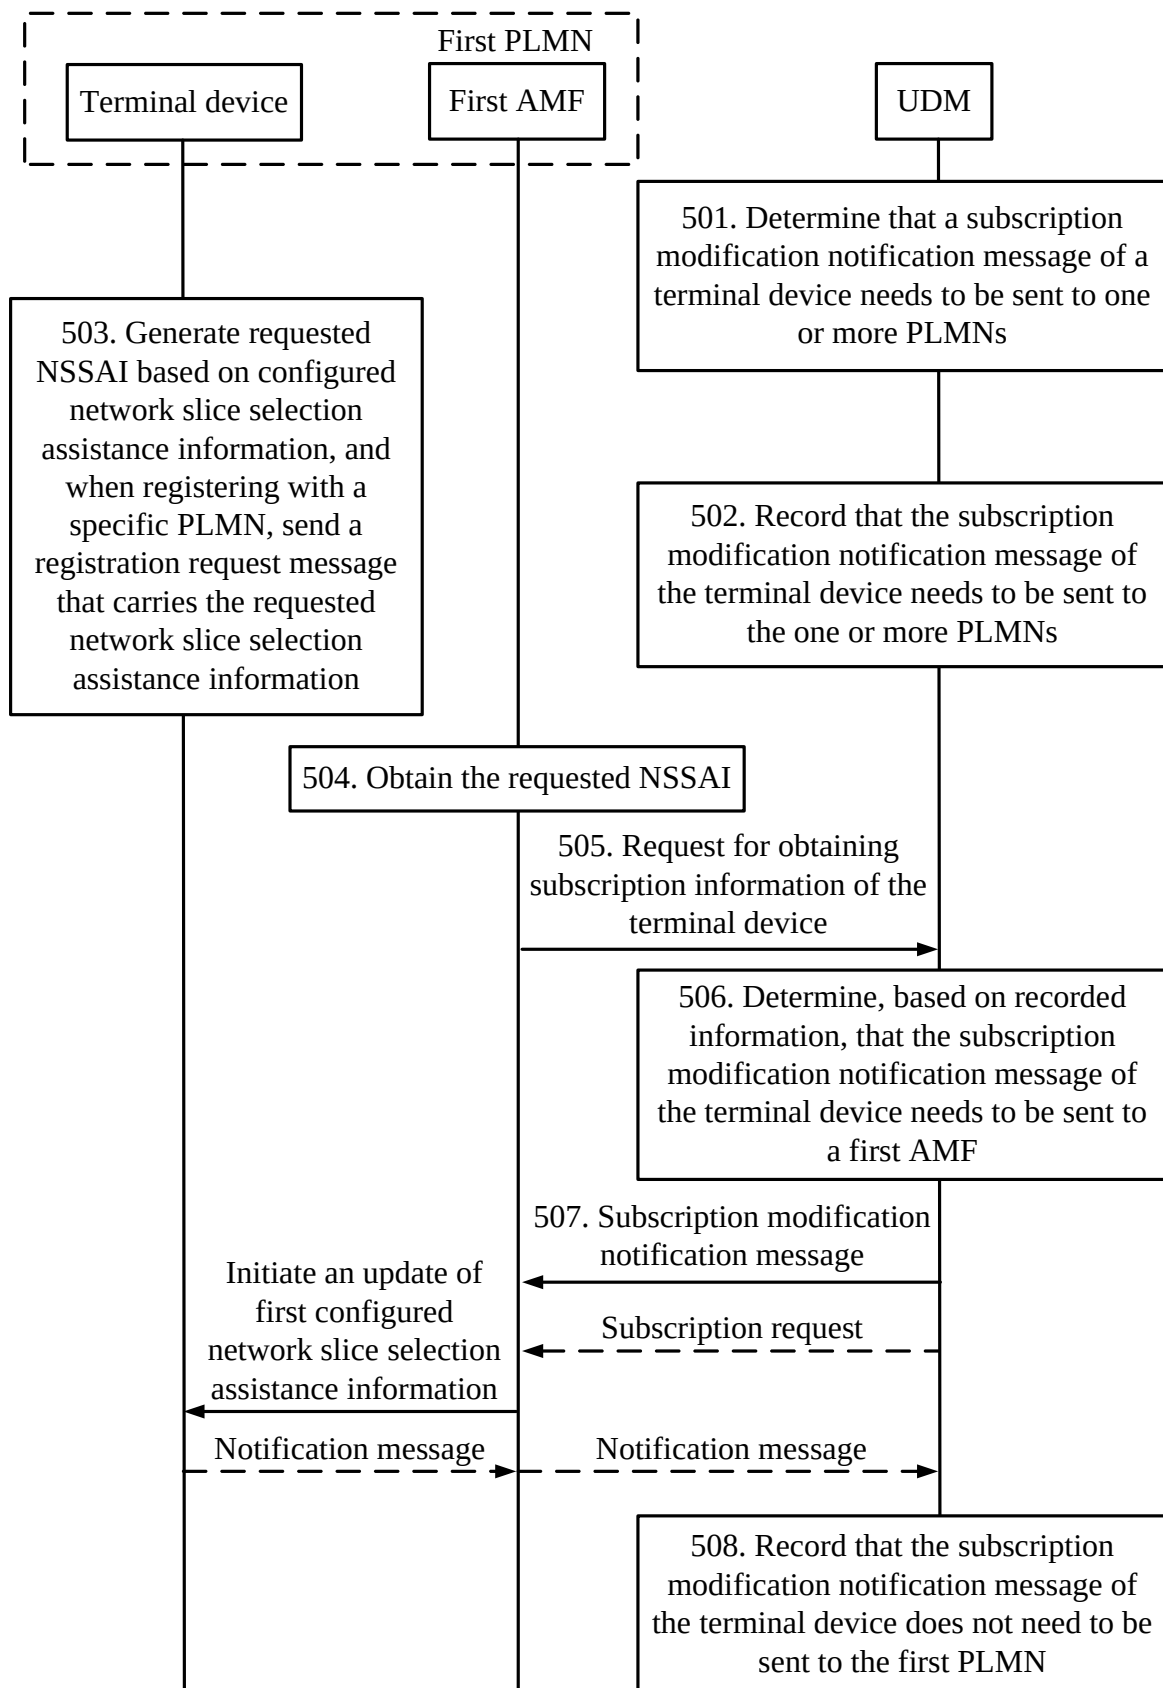


FIG. 5

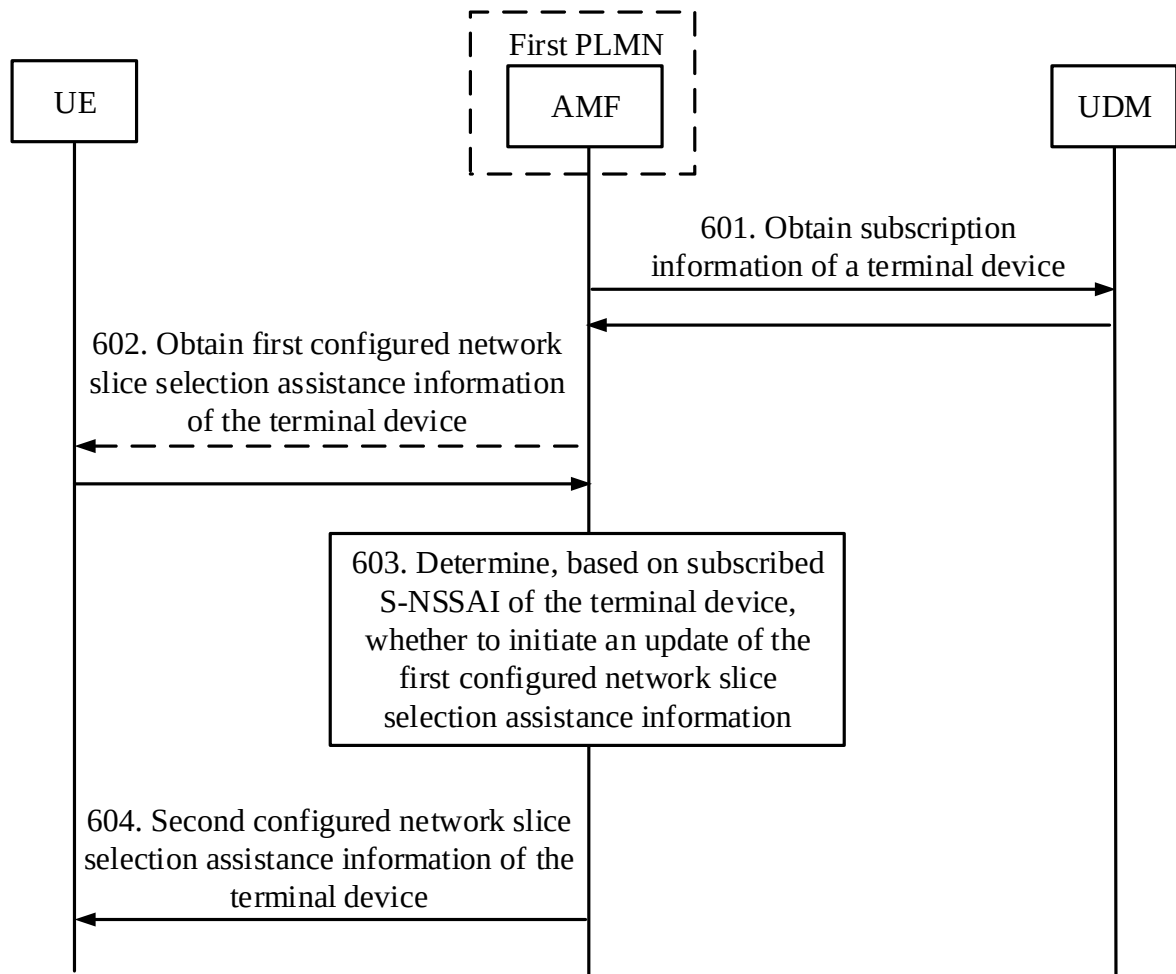


FIG. 6

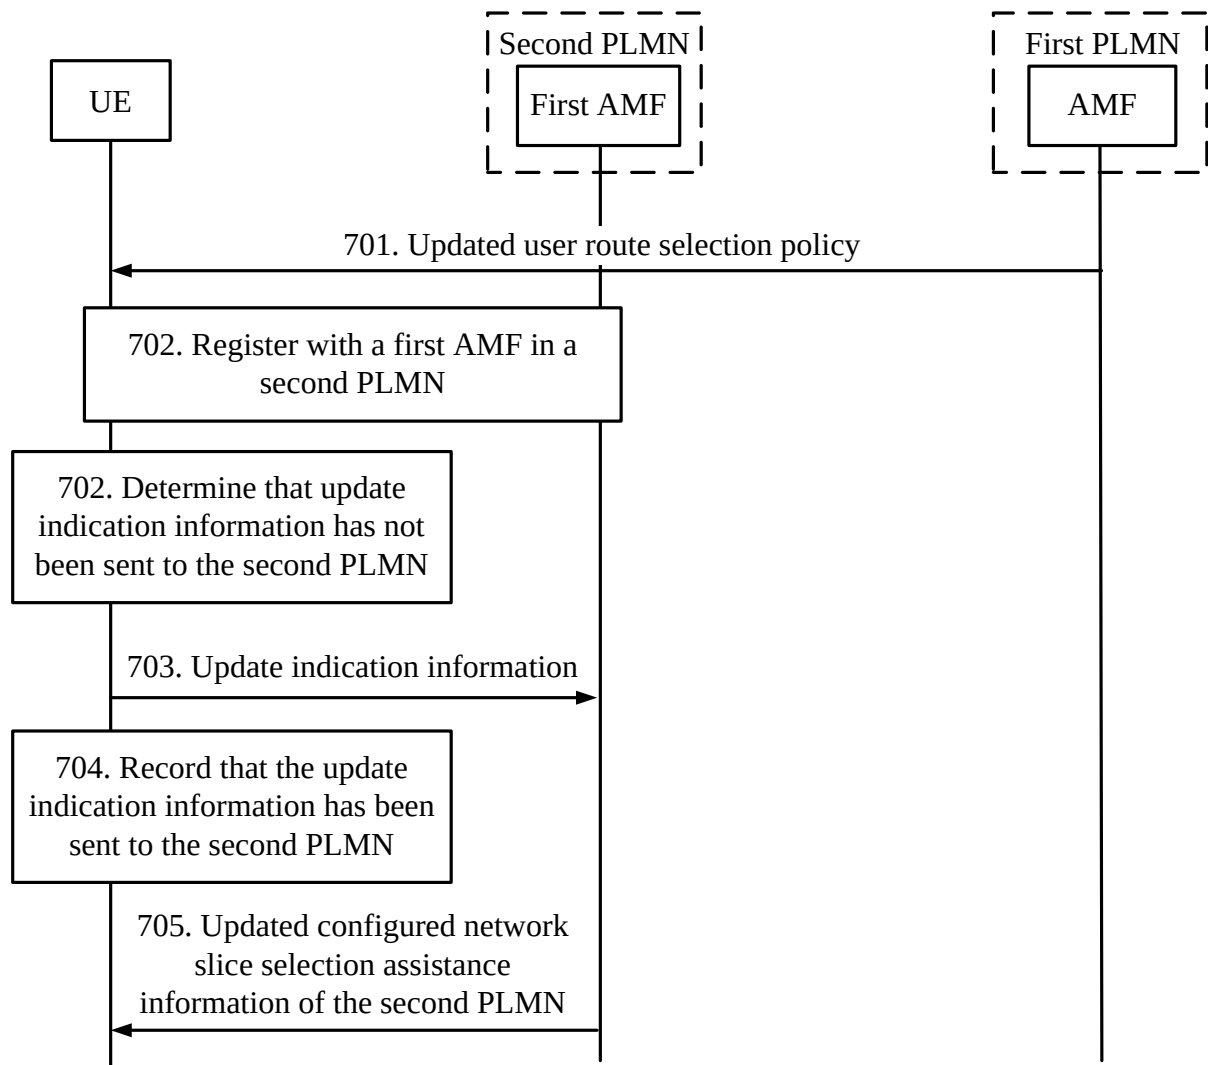


FIG. 7

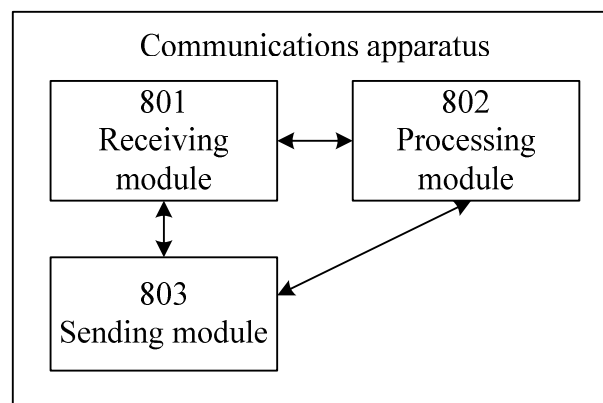


FIG. 8A

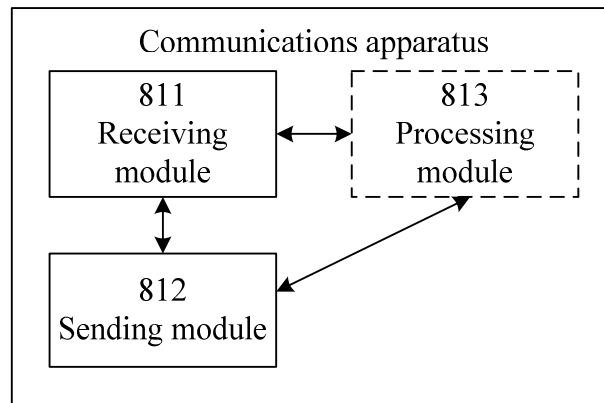


FIG. 8B

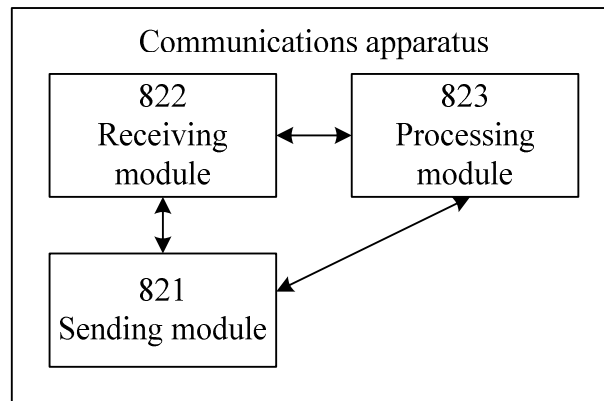


FIG. 8C

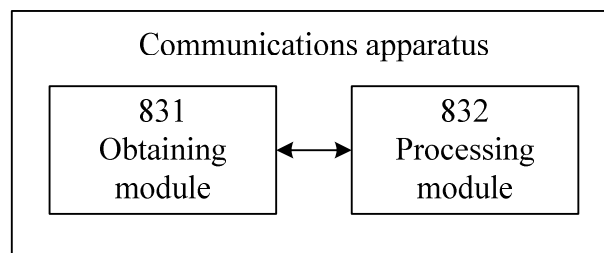


FIG. 8D

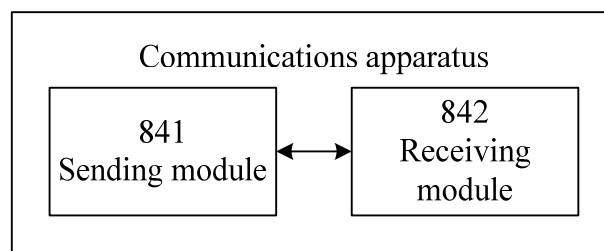


FIG. 8E

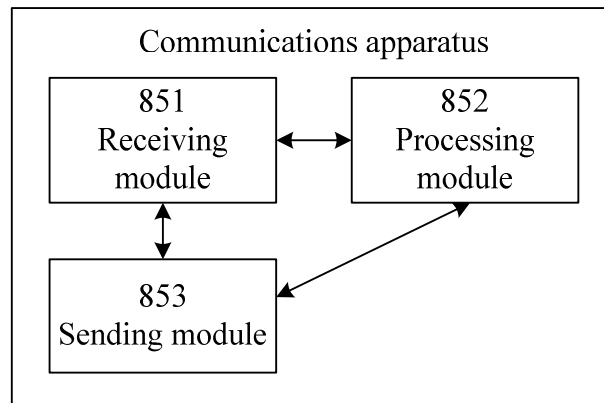


FIG. 8F

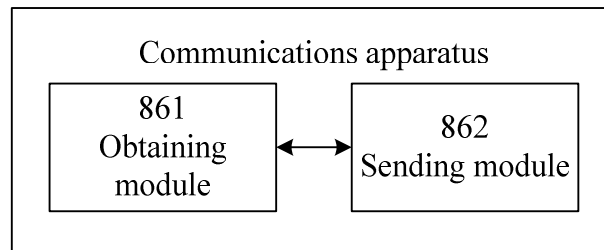


FIG. 8G

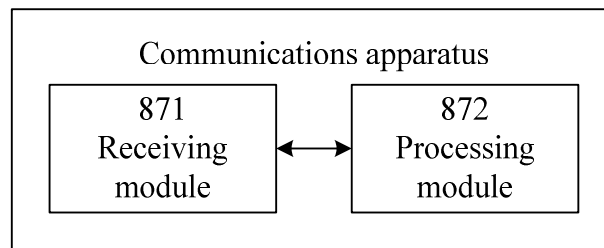


FIG. 8H

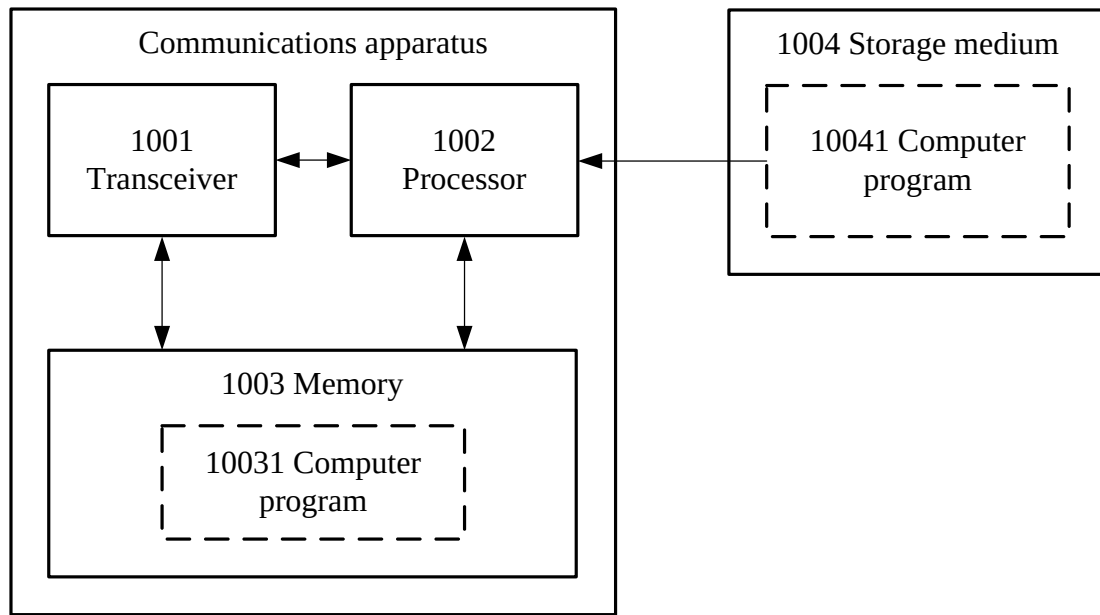


FIG. 9

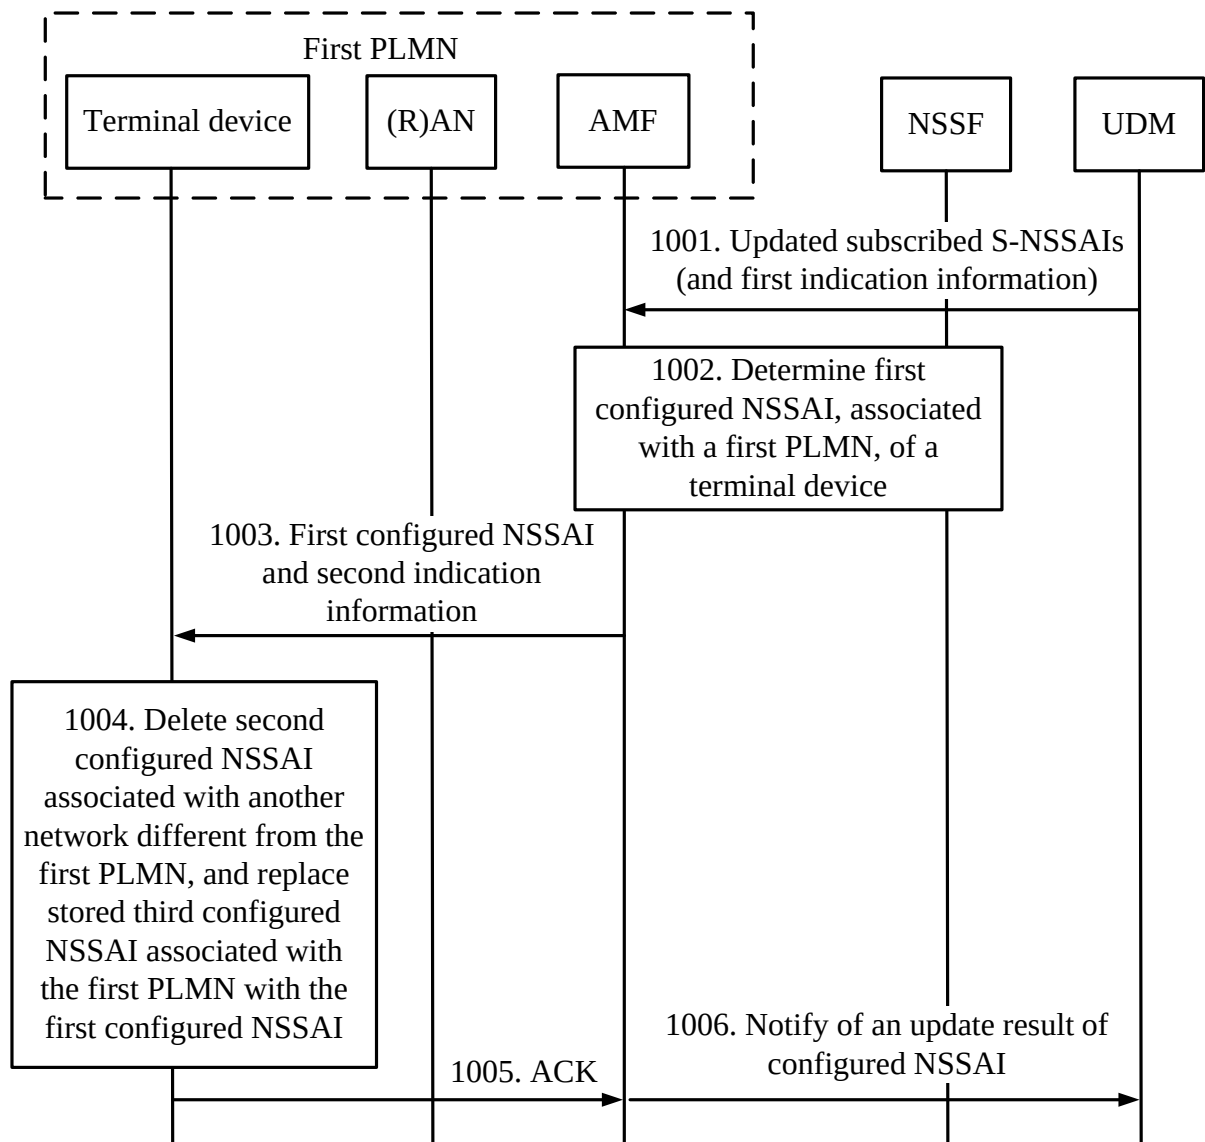


FIG. 10

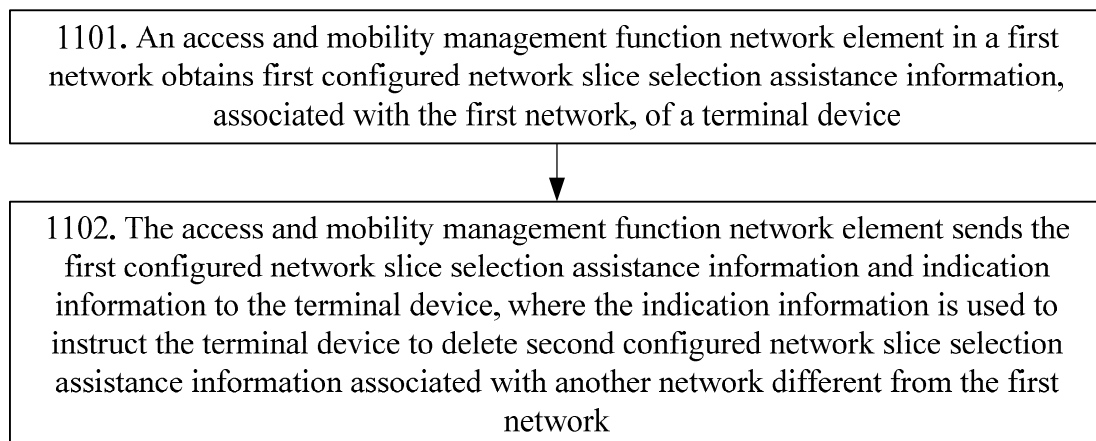


FIG. 11

1201. A terminal device receives, from an access and mobility management function network element in a first network, first configured network slice selection assistance information, corresponding to the first network, of the terminal device

1202. The terminal device deletes second configured network slice selection assistance information associated with another network different from the first network, and replaces stored third configured network slice selection assistance information associated with the first network with the first configured network slice selection assistance information

FIG. 12

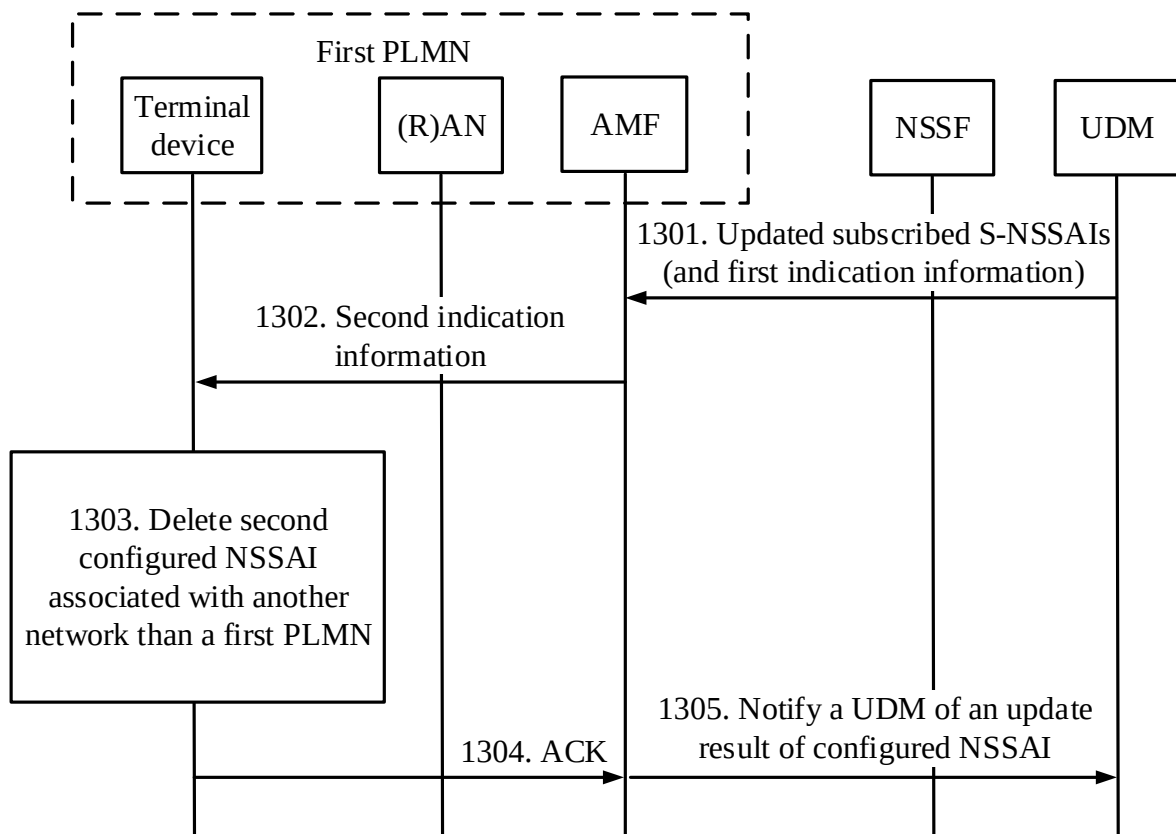


FIG. 13