

**A UNIVERSAL SUPPORT AND POSITIONING STRUCTURE FOR TOOLS
USED BY AN ELONGATE ELEMENT BENDING MACHINE**

The present invention relates to a support and positioning structure for tools used by a machine for bending elongate elements such as tubes or profiled sections.

Known structures of the type indicated are designed for well defined applications and therefore have the disadvantage that they cannot be adapted for use in bending elements different from those originally intended.

The object of the present invention is that of providing a structure of the type indicated above which is adapted for use in positioning and supporting various tools used for bending elongate elements of widely varying forms, thereby obtaining apparatus which is not excessively complex and which operates simply and with wide versatility in use.

This object is achieved with a structure of the type indicated above, characterised by the fact that it includes at least one base body and a support platform

This Sheet Has Been Replaced



REPLACED SHEETS		SG
☒	Description : paged 1 to paged 2	
☒	Claim(s) : paged 1 to paged 2	
☐	Drawing(s) : paged 1 to paged 4	
☐	Abstract : paged 1 to paged 1	
DATE OF RECEIPT		

for said tools movably mounted on the base body and provided with means for rotating it circumferentially and for contemporaneously displacing it radially with respect to a pivot fixed to the base body.

Preferably, said base body and support platform form part of a slide movably mounted on a support frame, means being provided for moving the slide relative to this latter in at least one direction.

More preferably the structure according to the invention comprises two slides movably mounted on a single support frame and each comprising a respective base body and a respective support platform.

Before use of the machine for bending elongate elements into a desired configuration the slides are conveniently positioned with respect to the frame by their associated movement-drive means. Then the tools required by the type of bending which it is intended to effect are positioned on the support platforms of the slides. Subsequently the bending operation itself is effected by a suitable combined translational and rotational movement of the support platforms about their respective pivots.

In practice, the rotational movement allows the desired curvature to be obtained, whilst the translational



movement, which takes place contemporaneously with the rotational movement, causes the curved element to yield so that it can no longer reassume its original, undeformed configuration as a result of the elastic restoring forces, once the bending stress has been released.

The present invention also comprehends a machine for bending elongate elements including a tool support and positioning structure of the type indicated above.

Advantages and characteristics of the present invention will become apparent from the following detailed description made with reference to the appended drawings, provided by way of non-limitative example, in which:

Figure 1 is a perspective view of the structure of the invention;

Figure 2 is a side view of the structure of the invention;

Figure 3 is a plan view of the structure of the invention; and

Figure 4 is a perspective view of a bending machine which utilises a structure of the type illustrated in the preceding figures.

A universal support and positioning structure for tools used by a bending machine (Figures 1 to 3) includes a



pair of slides 2 slidably mounted on a support frame 4.

Each slide 2 comprises a flat base body 6 connected to a first plate 8 slidable on a second plate 10 by means of a pair of projections 12 which fit into respective grooves 14 formed in the second plate 10.

This latter is in turn slidable on the frame 4 by means of a pair of terminal coupling elements 16 which engage respective guides 18 of the frame 4.

Fixed to each first plate 8 is a first feed nut 20 associated with a first lead screw 22 extending transverse the frame. Similarly, each second plate 10 has a second feed nut 24 fixed thereto and associated with a second lead screw 26 mounted to lie along the longitudinal axis of the frame 2, substantially perpendicular to the first screw 22.

The base body 6 of each slide 2 supports a pin 28 and carries a rack 30, shaped in the manner of a circumferential arc on a portion of its outer perimeter. A table 32 is rotatable about each pin 28 and supports a hydraulic motor 34 which drives a pinion 36 which meshes with the respective rack 30. Each table 32 further supports a pair of guide elements 38 on which protuberances 42 which project downwardly from a



respective support platform 43 are slidably retained. Each of these latter is fixed to an actuator cylinder 44 having a piston 46 the free end of which is fixed to the associated table 32.

Furthermore, a cam follower roller 48 projects downwardly from each support platform 43 and cooperates with a shaped cam element 50 keyed to the respective pin 28.

The operation of the device is as follows.

Depending on the type of elongate element which it is intended to bend and the curvature which it is intended to impart thereto, the base bodies 6 of the two slides 2 are positioned relative to the frame 4 by translational movement in two orthogonal directions. For this purpose the second screws 26 are rotated and cooperate with the second feed nuts 24 which cause the second plates 10 to move longitudinally, these carrying the first plates 8 mounted thereon with them in their movement (this movement is indicated by the arrows 52 in Figures 1 and 3).

The turning of the first screws 22, which cooperate with the first feed nuts 20, then drives a transverse translational movement of the first plate 8 relative to the frame 4, with the definitive positioning of the base



bodies 6 with respect to the frame (this movement, orthogonal to that indicated by the arrows 52, is indicated by the arrows 54 in Figures 1 and 3).

At this point the tools 56 necessary to support and clamp the elongate elements 58 during the bending operation itself are positioned in a known manner on the support planes 43 of the slides 2 (Figure 4).

The bending operation takes place thanks to a combined translational and rotational movement of the platforms 43, which support the tools 56 and the elongate elements 58, with respect to the pins 28.

In fact, the rotation allows the desired curvature to be obtained whilst the translation, which takes place simultaneously with the rotation, causes the curved element 58 to yield so that it can no longer reassume its original, undeformed configuration as a result of the resilient restoring forces once the bending stress has been released.

The rotation of the platforms 43 about the pins 28 (indicated by the arrows 60 in Figures 1 and 3) is driven by the hydraulic motors 34 which, by rotating the respective pinions 36 which mesh with the associated racks 30, cause the associated tables 32 which carry the



support platform 43 to rotate about the pins 28.

The radial translational movement of the platforms 43 with respect to the pins 28 (indicated by the arrows 62 in Figure 1) takes place simultaneously with the rotation thanks to the action of the actuator cylinders 44 or to the engagement existing between the cam follower rollers 48 and the shaped cam elements 50 keyed to the pins 28.

The coordination and control of the rotational and translational movements is achieved by an apparatus control computer, not illustrated in the drawings, to which the individual actuator devices are connected in a manner known per se.

Figures 1 to 3 of the appended drawings illustrate both types of device for enabling the radial translation mounted on the same machine. Obviously, in practice, use will be made of only one of these depending on the specific applicational requirements. In fact, the cam and cam follower roller device is more economical but requires longer to be adapted to a different bending process, whilst the actuator cylinder system (illustrated only in Figure 4) is more expensive but more rapidly adaptable to different uses.

The versatility of the apparatus of the invention is



evident from what has been described above in that, by simple adjustment of the screws 22, 26 and feed nuts 20, 24, the position of the base bodies 6 of the slides 2 with respect to the frame 4 can be adjusted and by making the support platforms 43 perform different translational and rotational movements with respect to the pins 28 one can obtain the most varied bending shapes.

Naturally, the principle of the invention remaining the same, the details of construction and the embodiments can be widely varied with respect to what has been described and illustrated without thereby departing from the scope of the present invention.

For example, the apparatus of the invention may include a single slide movable on the support frame. Such apparatus is adapted to bending elongate elements, which can be clamped between a vice not mounted on the support structure and tools supported by the support platform of the single slide, into shapes which are not excessively complicated.





CLAIMS

1. A universal support and positioning structure for tools (56) used by a machine for bending elongate elements (58) such as tubes or profiled sections, characterised by the fact that it includes at least one base body (6) and a support platform (43) for said tools (56) movably mounted on the base body (6) and provided with means (30, 34, 36) for rotating it circumferentially and means (44-40) for contemporaneously displacing it radially with respect to a pivot (28) fixed to the base body (6).

2. A structure according to Claim 1, characterised by the fact that said base body (6) and said support platform (43) form part of a slide (2) movably mounted on a support frame (4), means (20-26) being provided for moving the slide relative to the frame (4) in at least one direction.

3. A structure according to Claim 2, characterised by the fact that it includes two slides (2) movably mounted on a single support frame (4) and each including a respective base body (6) and a respective support platform (43).





4. A structure according to Claim 2 or Claim 3, characterised by the fact that said slide (2) is provided with means (20-26) for displacing it relative to the frame (4) in two different directions, preferably orthogonal to one another.

5. A structure according to Claim 4, characterised by the fact that the said means for displacing the body (6) of the slide (2) relative to the frame (4) comprise a first plate (8) to which is fixed a first feed nut (20) associated with a first lead screw (22) mounted on the frame (4), the first plate (8) being slidable relative to a second plate (10) to which a second feed nut (24) associated with a second lead screw (26) is fixed, said second plate (10) being slidable on the support frame (4) in a direction substantially perpendicular to the direction of sliding of the first plate (8) relative to the second plate (10).

6. A structure according to Claim 5, characterised by the fact that the first plate (8) is slidably mounted on the second plate (10) by means by a pair of projections (12) which engage in respective grooves (14) in the second plate (10), and by the fact that the second plate (10) is slidably mounted on the support frame (4) by means of a pair of terminal coupling elements (16) which engage with respective guides (18) of the frame (4).

This Sheet Has Been Replaced





7. A structure according to any preceding Claim, characterised by the fact that said means for rotating the support platform (43) circumferentially with respect to the pivot (28) comprise a table (32) rotatable about the pivot (28) and on which there are located the support platform (43) and a hydraulic motor (34) which drives a pinion (36) engagable with a rack (30) shaped in the form of a circumferential arc and carried by the base body (6) to which the pivot (28) is fixed.

8. A structure according to Claim 7, characterised by the fact that said means for displacing the support platform (43) radially with respect to the pivot (28) comprises a cam-shaped element (50) keyed to the pivot (28) and arranged to cooperate with a cam follower roller (48) which projects below the support platform (43), said platform (43) being slidable relative to the table (32) by means of a pair of protuberances (42) which engage with guide elements (38) fixed to the table (32).

9. A structure according to Claim 7, characterised by the fact that said means for displacing the support platform (43) radially with respect to the pivot (28) comprises an actuator cylinder (44) mounted on the support platform (43) and having a piston (46) the free end of which is fixed to the table (32), said support platform (43) being slidable relative to the table (32)





by means of a pair of protuberances (42) which engage with guide elements (38) fixed to the table (32).

10. A machine for bending elongate elements (58), characterised by the fact that it includes a universal support and positioning structure for tools (56) according to any preceding Claim.



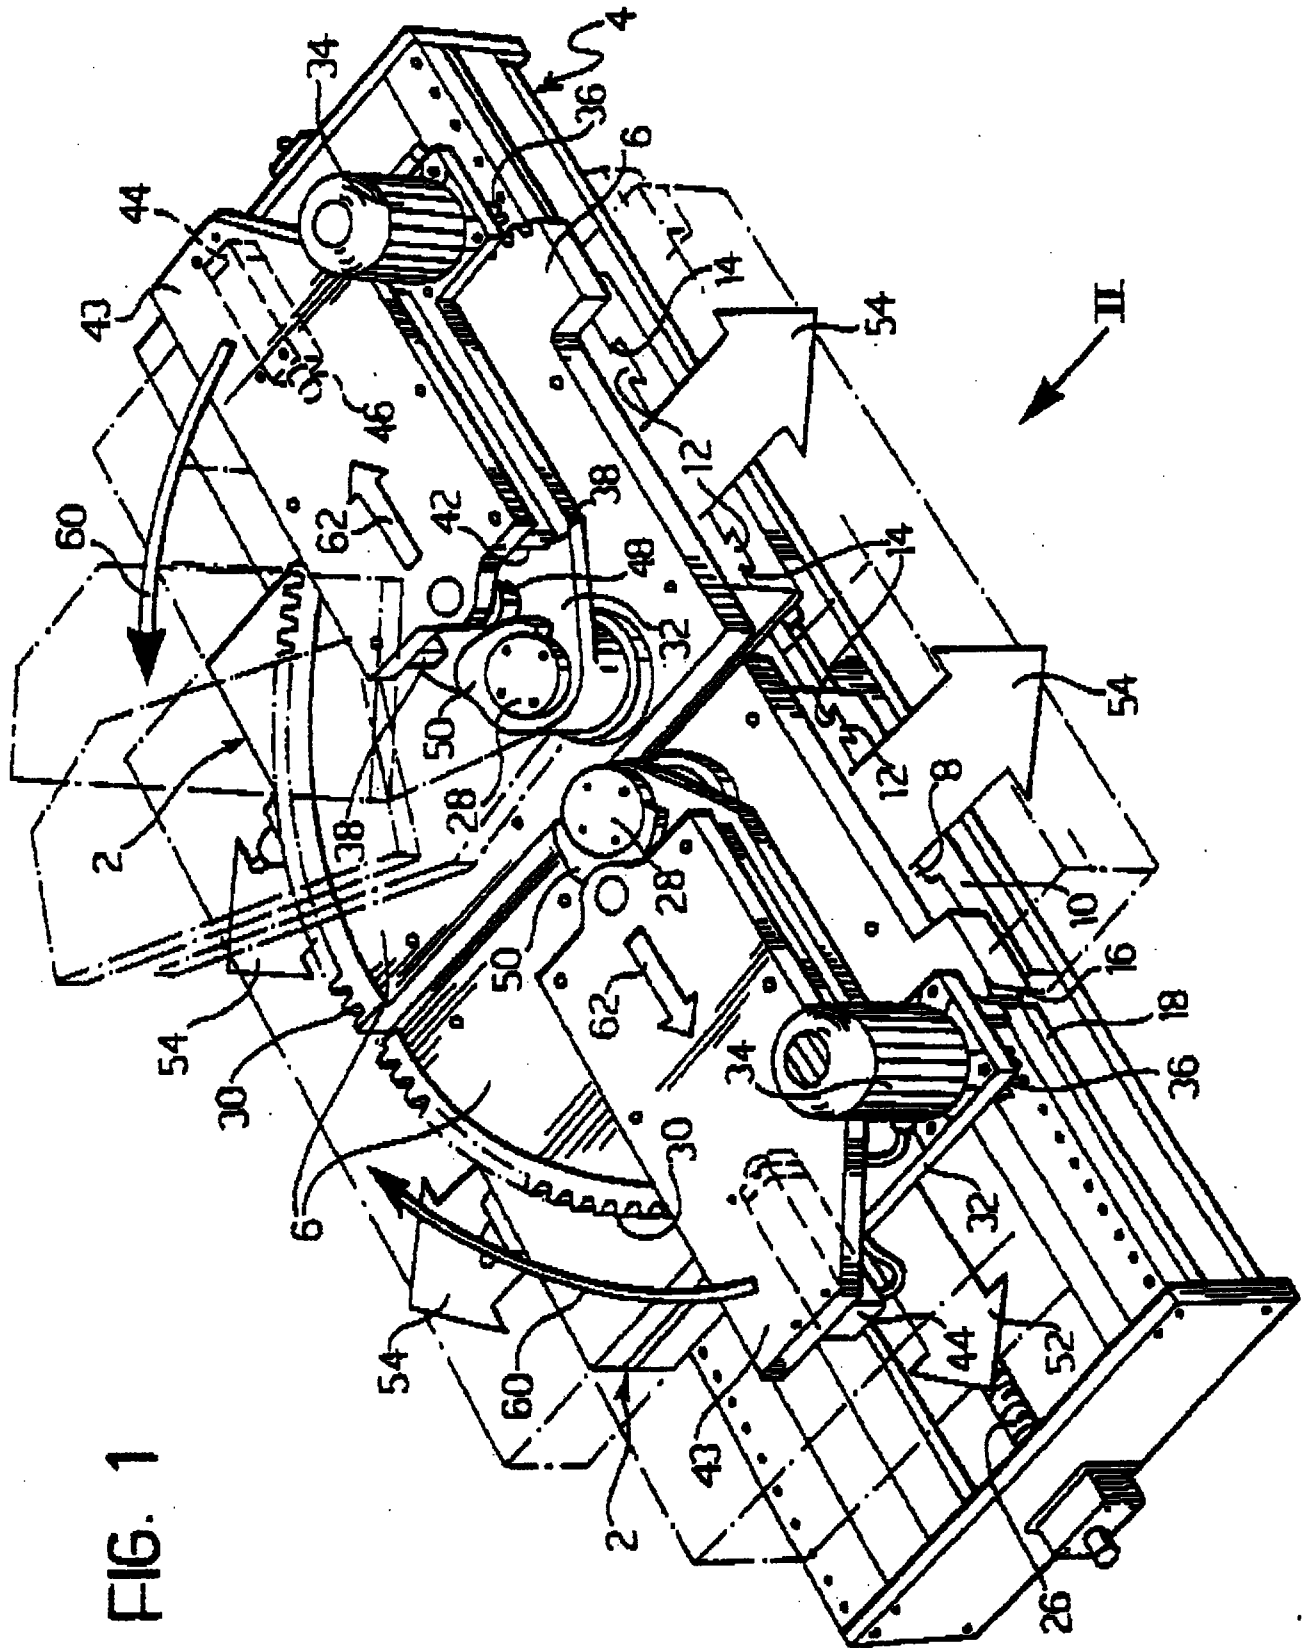


FIG. 1



FIG. 2

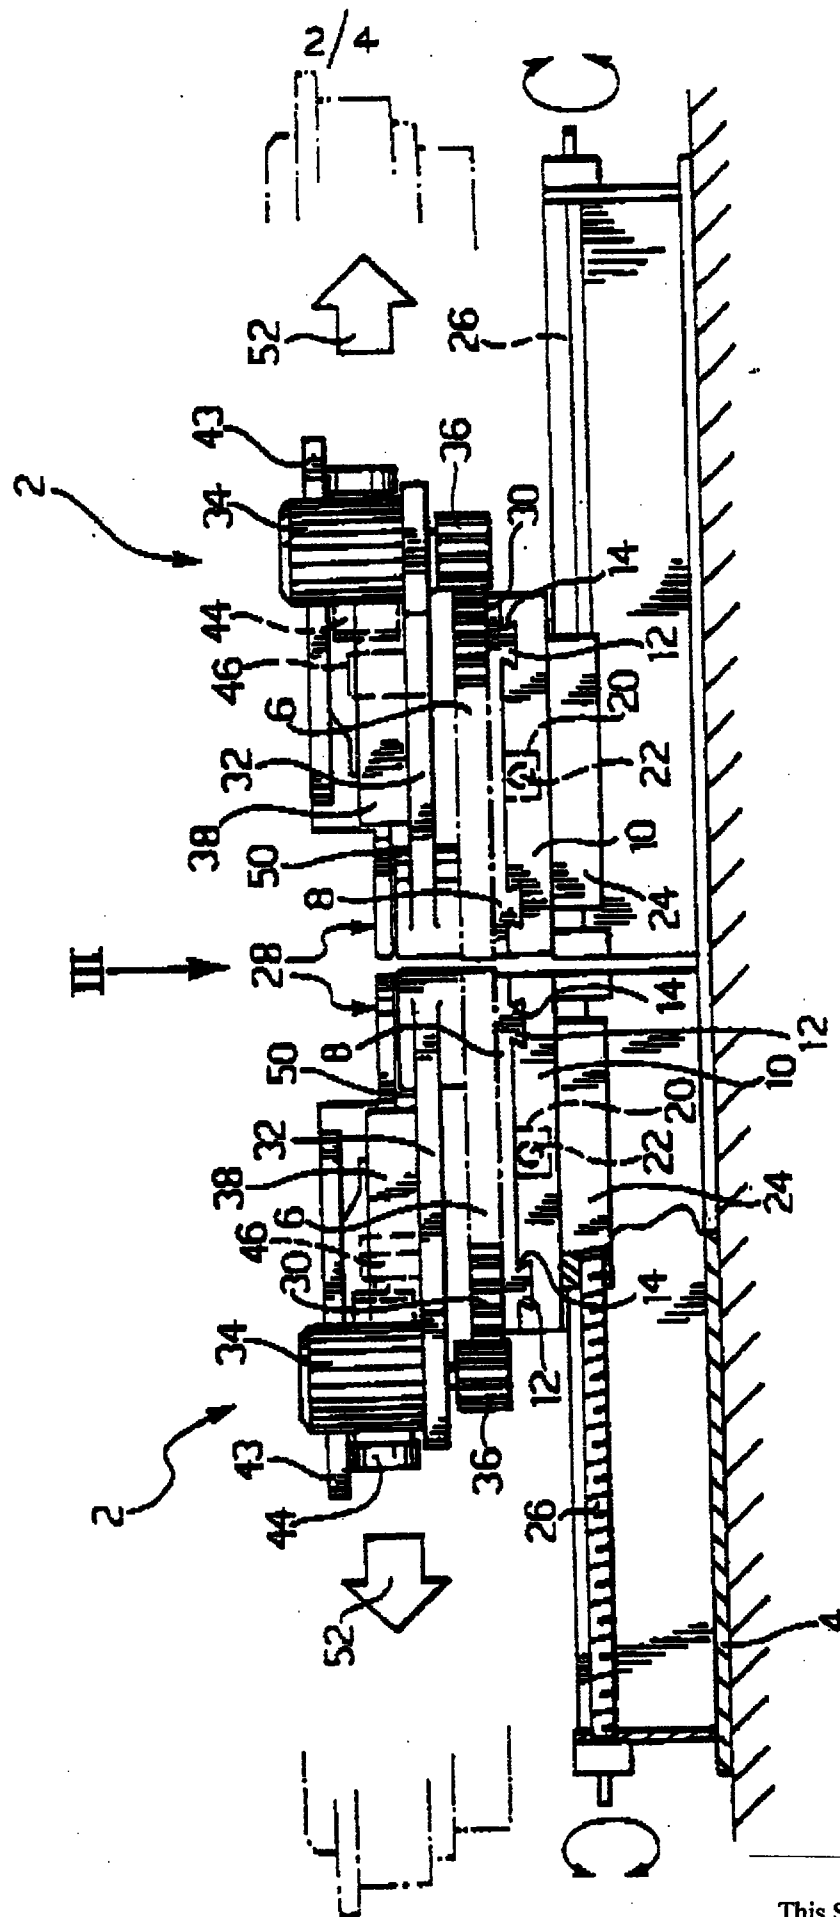


FIG. 3


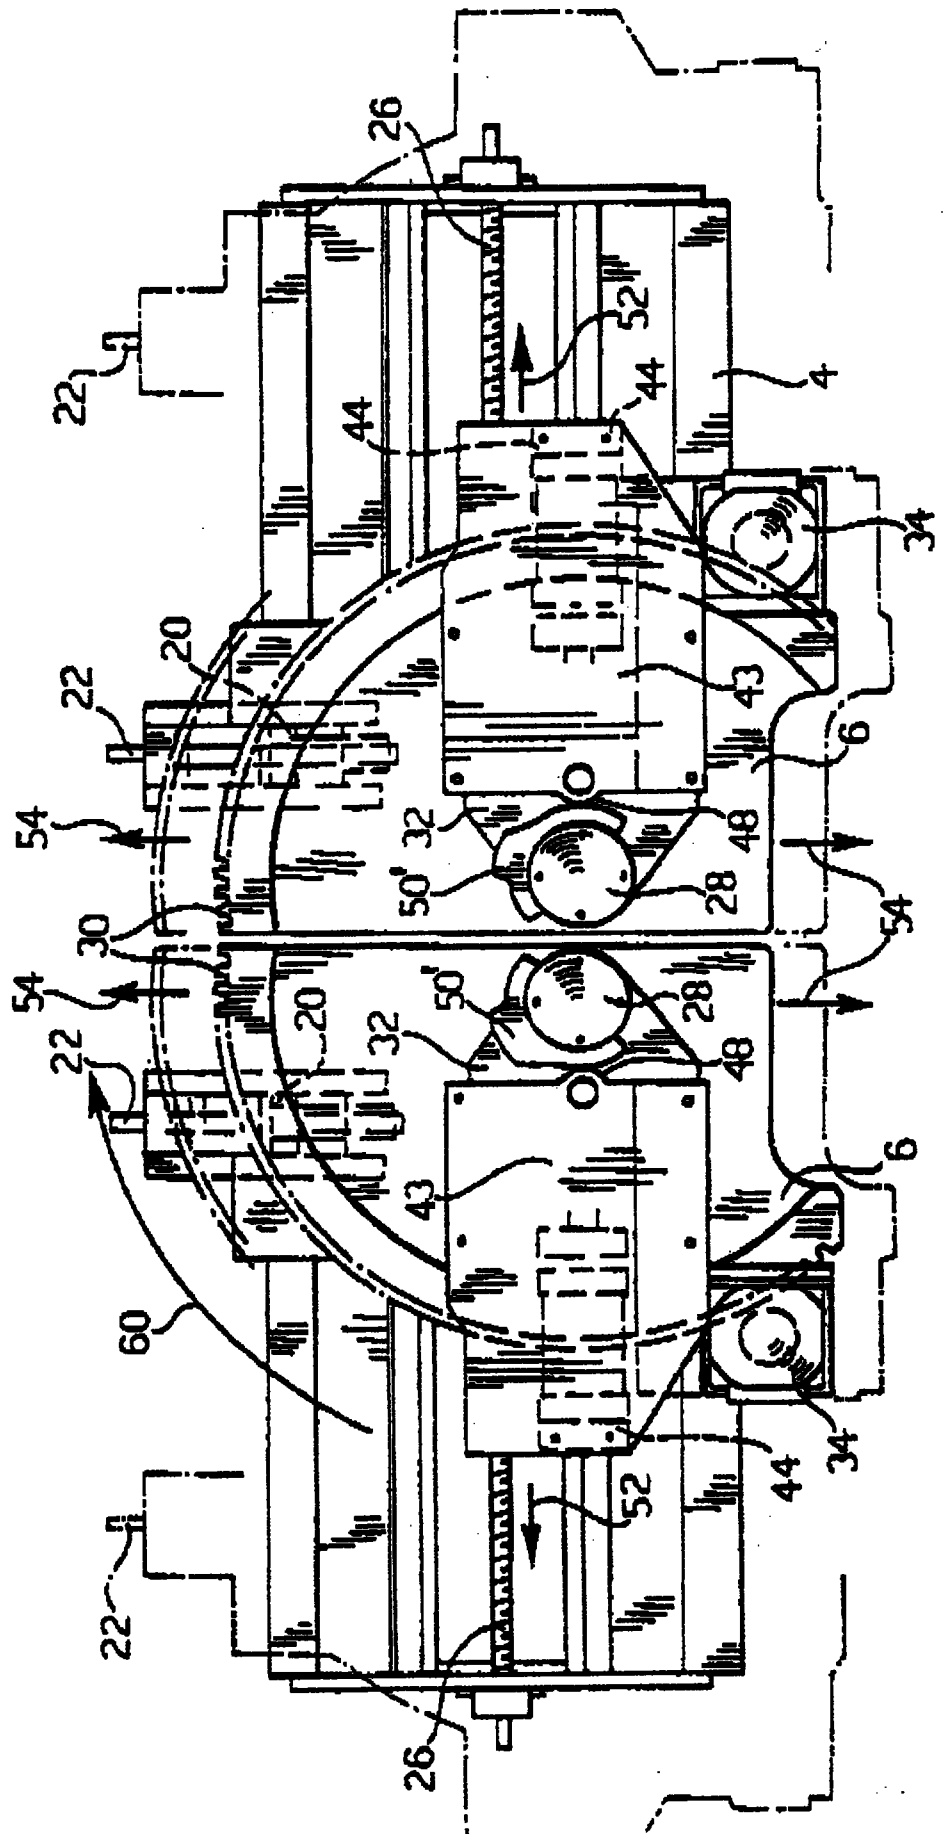


FIG. 4

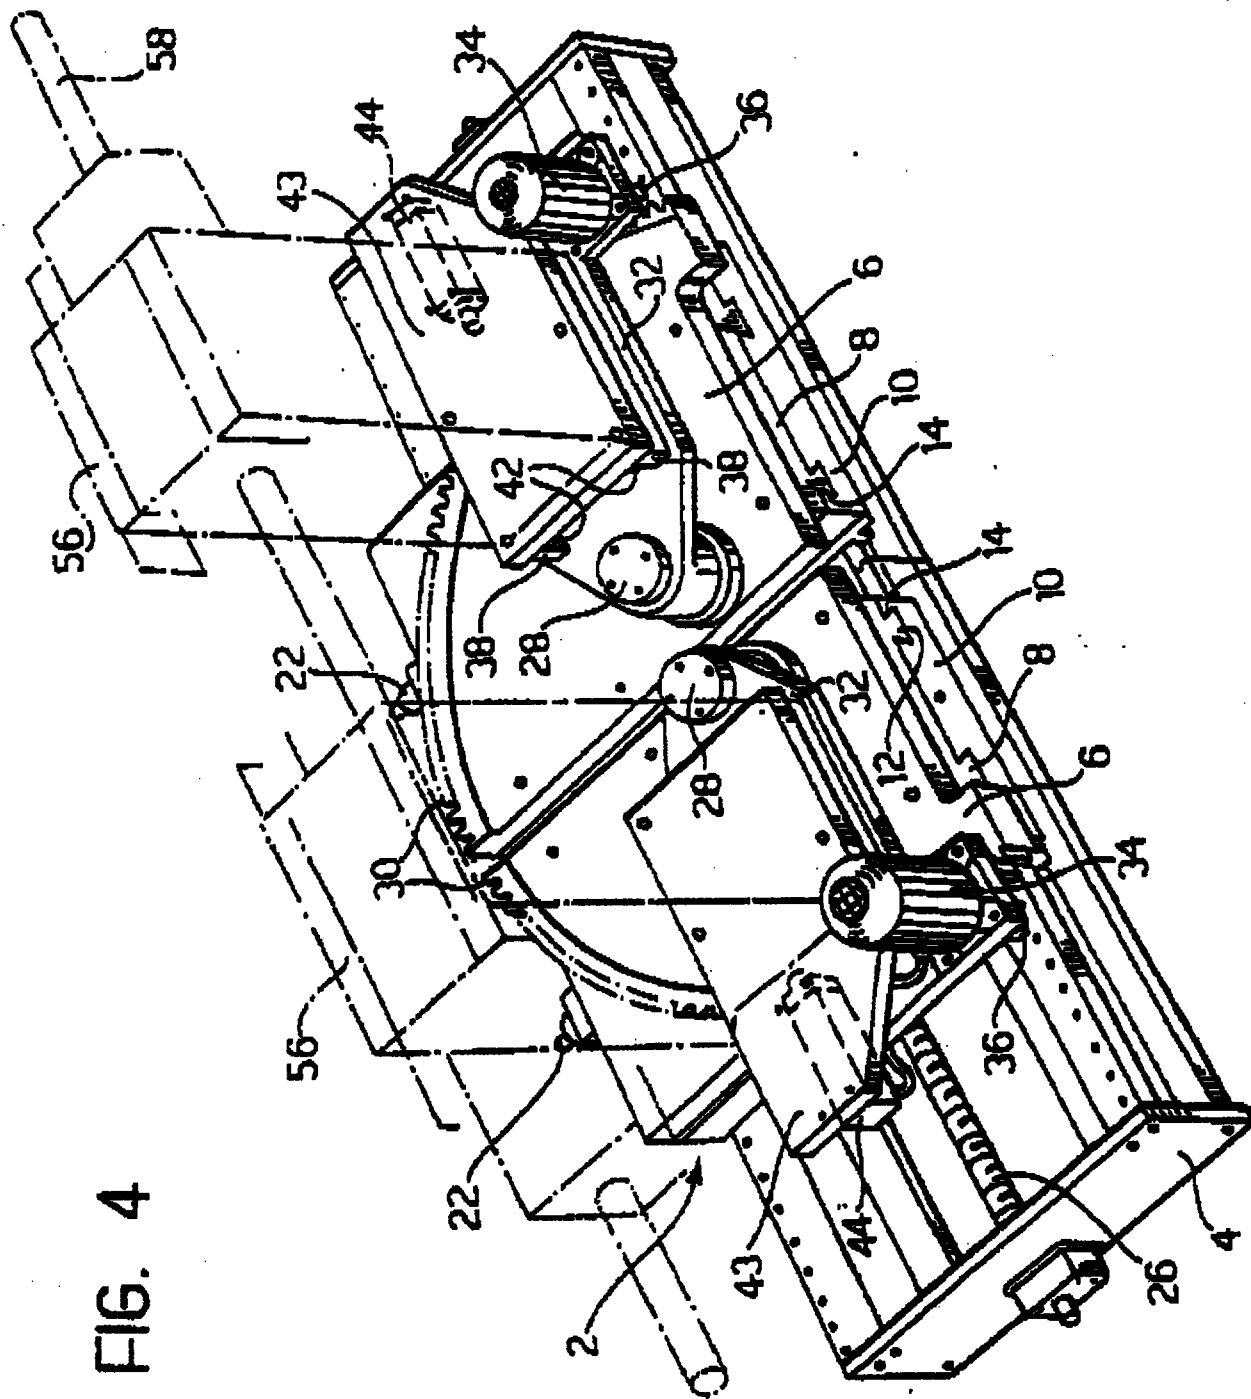

Amendments under Art. 34 PCT

making part of EURO-PCT text

CLAIMS

1. A universal support and positioning structure for tools (56) used by a machine for clamping and bending elongate elements (58) such as tubes or profiled sections, including at least one base body (6) and a support platform (43) for said tools (56) movably mounted on the base body (6) and provided with means (30, 34, 36) for rotating the support platform (43) circumferentially with respect to a pivot (28) fixed to the base body (6) and characterised in that it further includes means (44-40) for displacing the support platform (43) radially with respect to the pivot (28) contemporaneously to its rotation.
2. A structure according to Claim 1, characterised by the fact that said base body (6) and said support platform (43) form part of a slide (2) movably mounted on a support frame (4), means (20-26) being provided for moving the slide relative to the frame (4) in at least one direction.
3. A structure according to Claim 2, characterised by the fact that it includes two slides (2) movably mounted on a single support frame (4) and each including a respective base body (6) and a respective support platform (43).



REPLACEMENT SHEETS SG

- ☒ Description : paged 1... to paged 3...
☒ Claim(s) : paged 1... to paged 12...
☒ Drawing(s) : paged 1/4... to paged 1/4...
☒ Abstract : paged 1... to paged 1...

DATE OF RECEIPT ...21/7/97.....

1

**A UNIVERSAL SUPPORT AND POSITIONING STRUCTURE FOR TOOLS
USABLE BY AN ELONGATE ELEMENT BENDING MACHINE**

The present invention relates to a support and positioning structure for tools usable by a machine for bending elongate elements such as tubes or profiled sections.

Known structures of the type indicated are designed for well defined applications and therefore have the disadvantage that they cannot be adapted for use in bending elements different from those originally intended.

More particularly the present invention relates to a support and positioning structure having the features indicated in the preamble of claim 1. A structure of this kind is disclosed in prior document US-A-2 884 987.

The object of the present invention is that of providing a structure of the type indicated above which is adapted for use in positioning and supporting various tools used for bending elongate elements of widely varying forms, thereby obtaining apparatus which is not excessively complex and which operates simply and with wide versatility in use.

This object is achieved with a structure as disclosed in claim 1.

Preferably, said base body and support platform form part of a slide movably mounted on a support frame, means being provided for moving the slide relative to this latter in at least one direction.

More preferably the structure according to the invention comprises two slides movably mounted on a single support

This is the replacement sheet

Date: 21 JUL 1997

frame and each comprising a respective base body and a respective support platform.

Before use of the machine for bending elongate elements into a desired configuration the slides are conveniently positioned with respect to the frame by their associated movement-drive means. Then the tools required by the type of bending which is intended to effect are positioned on the support platforms of the slides. Subsequently the bending operation itself is effected by a suitable combined translational and rotational movement of the support platforms about their respective pivots.

In practice, the rotational movement allows the desired curvature to be obtained, whilst the translational

movement, which takes place contemporaneously with the rotational movement, causes the curved element to yield so that it can no longer reassume its original, undeformed configuration as a result of the elastic restoring forces, once the bending stress has been released.

The present invention also comprehends a machine for bending elongate elements including a tool support and positioning structure of the type indicated above.

Advantages and characteristics of the present invention will become apparent from the following detailed description made with reference to the appended drawings, provided by way of non-limitative example, in which:

Figure 1 is a perspective view of the structure of the invention;

Figure 2 is a side view of the structure of the invention;

Figure 3 is a plan view of the structure of the invention; and

Figure 4 is a perspective view of a bending machine which utilises a structure of the type illustrated in the preceding figures.

A universal support and positioning structure for tools used by a bending machine (Figures 1 to 3) includes a

This is the replacement sheet

Date: 21 JUL 1997

pair of slides 2 slidably mounted on a support frame 4.

Each slide 2 comprises a flat base body 6 connected to a first plate 8 slidable on a second plate 10 by means of a pair of projections 12 which fit into respective grooves 14 formed in the second plate 10.

This latter is in turn slidable on the frame 4 by means of a pair of terminal coupling elements 16 which engage respective guides 18 of the frame 4.

Fixed to each first plate 8 is a first feed nut 20 associated with a first lead screw 22 extending transverse the frame. Similarly, each second plate 10 has a second feed nut 24 fixed thereto and associated with a second lead screw 26 mounted to lie along the longitudinal axis of the frame 2, substantially perpendicular to the first screw 22.

The base body 6 of each slide 2 supports a pin 28 and carries a rack 30, shaped in the manner of a circumferential arc on a portion of its outer perimeter. A table 32 is rotatable about each pin 28 and supports a hydraulic motor 34 which drives a pinion 36 which meshes with the respective rack 30. Each table 32 further supports a pair of guide elements 38 on which protuberances 42 which project downwardly from a

This is the replacement sheet

Date: 21 JUL 1997

respective support platform 43 are slidably retained. Each of these latter is fixed to an actuator cylinder 44 having a piston 46 the free end of which is fixed to the associated table 32.

Furthermore, a cam follower roller 48 projects downwardly from each support platform 43 and cooperates with a shaped cam element 50 keyed to the respective pin 28.

The operation of the device is as follows.

Depending on the type of elongate element which it is intended to bend and the curvature which it is intended to impart thereto, the base bodies 6 of the two slides 2 are positioned relative to the frame 4 by translational movement in two orthogonal directions. For this purpose the second screws 26 are rotated and cooperate with the second feed nuts 24 which cause the second plates 10 to move longitudinally, these carrying the first plates 8 mounted thereon with them in their movement (this movement is indicated by the arrows 52 in Figures 1 and 3).

The turning of the first screws 22, which cooperate with the first feed nuts 20, then drives a transverse translational movement of the first plate 8 relative to the frame 4, with the definitive positioning of the base

This is the replacement sheet

Date: 21 JUL 1997

bodies 6 with respect to the frame (this movement, orthogonal to that indicated by the arrows 52, is indicated by the arrows 54 in Figures 1 and 3).

At this point the tools 56 necessary to support and clamp the elongate elements 58 during the bending operation itself are positioned in a known manner on the support planes 43 of the slides 2 (Figure 4).

The bending operation takes place thanks to a combined translational and rotational movement of the platforms 43, which support the tools 56 and the elongate elements 58, with respect to the pins 28.

In fact, the rotation allows the desired curvature to be obtained whilst the translation, which takes place simultaneously with the rotation, causes the curved element 58 to yield so that it can no longer reassume its original, undeformed configuration as a result of the resilient restoring forces once the bending stress has been released.

The rotation of the platforms 43 about the pins 28 (indicated by the arrows 60 in Figures 1 and 3) is driven by the hydraulic motors 34 which, by rotating the respective pinions 36 which mesh with the associated racks 30, cause the associated tables 32 which carry the

This is the replacement sheet

Date: 21 JUL 1997

support platform 43 to rotate about the pins 28.

The radial translational movement of the platforms 43 with respect to the pins 28 (indicated by the arrows 62 in Figure 1) takes place simultaneously with the rotation thanks to the action of the actuator cylinders 44 or to the engagement existing between the cam follower rollers 48 and the shaped cam elements 50 keyed to the pins 28.

The coordination and control of the rotational and translational movements is achieved by an apparatus control computer, not illustrated in the drawings, to which the individual actuator devices are connected in a manner known per se.

Figures 1 to 3 of the appended drawings illustrate both types of device for enabling the radial translation mounted on the same machine. Obviously, in practice, use will be made of only one of these depending on the specific applicational requirements. In fact, the cam and cam follower roller device is more economical but requires longer to be adapted to a different bending process, whilst the actuator cylinder system (illustrated only in Figure 4) is more expensive but more rapidly adaptable to different uses.

The versatility of the apparatus of the invention is

This is the replacement sheet

Date: 21 JUL 1997

evident from what has been described above in that, by simple adjustment of the screws 22, 26 and feed nuts 20, 24, the position of the base bodies 6 of the slides 2 with respect to the frame 4 can be adjusted and by making the support platforms 43 perform different translational and rotational movements with respect to the pins 28 one can obtain the most varied bending shapes.

Naturally, the principle of the invention remaining the same, the details of construction and the embodiments can be widely varied with respect to what has been described and illustrated without thereby departing from the scope of the present invention.

For example, the apparatus of the invention may include a single slide movable on the support frame. Such apparatus is adapted to bending elongate elements, which can be clamped between a vice not mounted on the support structure and tools supported by the support platform of the single slide, into shapes which are not excessively complicated.

This is the replacement sheet

Date: 21 JUL 1997

CLAIMS

1. A universal support and positioning structure for tools (56) usable by a machine for clamping and bending elongate elements (58) such as tubes or profiled sections, including at least one base body (6) and a support platform (43) for said tools (56) movably mounted on the base body (6) and provided with means (30, 34, 36) for rotating the support platform (43) circumferentially with respect to a pivot (28) fixed to the base body (6) and characterised in that it further includes means (44-40) for displacing the support platform (43) radially with respect to the pivot (28) contemporaneously to its rotation.

2. A structure according to Claim 1, characterised by the fact that said base body (6) and said support platform (43) form part of a slide (2) movably mounted on a support frame (4), means (20-26) being provided for moving the slide relative to the frame (4) in at least one direction.

3. A structure according to Claim 2, characterised by the fact that it includes two slides (2) movably mounted on a single support frame (4) and each including a respective base body (6) and a respective support platform (43).



This is the replacement sheet
21 JUL 1997
Date:

4. A structure according to Claim 2 or Claim 3, characterised by the fact that said slide (2) is provided with means (20-26) for displacing it relative to the frame (4) in two different directions, preferably orthogonal to one another.

5. A structure according to Claim 4, characterised by the fact that the said means for displacing the body (6) of the slide (2) relative to the frame (4) comprise a first plate (8) to which is fixed a first feed nut (20) associated with a first lead screw (22) mounted on the frame (4), the first plate (8) being slidable relative to a second plate (10) to which a second feed nut (24) associated with a second lead screw (26) is fixed, said second plate (10) being slidable on the support frame (4) in a direction substantially perpendicular to the direction of sliding of the first plate (8) relative to the second plate (10).

6. A structure according to Claim 5, characterised by the fact that the first plate (8) is slidably mounted on the second plate (10) by means by a pair of projections (12) which engage in respective grooves (14) in the second plate (10), and by the fact that the second plate (10) is slidably mounted on the support frame (4) by means of a pair of terminal coupling elements (16) which engage with respective guides (18) of the frame (4).



This is the replacement sheet

Date: 21 JUL 1997

7. A structure according to any preceding Claim, characterised by the fact that said means for rotating the support platform (43) circumferentially with respect to the pivot (28) comprise a table (32) rotatable about the pivot (28) and on which there are located the support platform (43) and a hydraulic motor (34) which drives a pinion (36) engagable with a rack (30) shaped in the form of a circumferential arc and carried by the base body (6) to which the pivot (28) is fixed.

8. A structure according to Claim 7, characterised by the fact that said means for displacing the support platform (43) radially with respect to the pivot (28) comprises a cam-shaped element (50) keyed to the pivot (28) and arranged to cooperate with a cam follower roller (48) which projects below the support platform (43), said platform (43) being slidable relative to the table (32) by means of a pair of protuberances (42) which engage with guide elements (38) fixed to the table (32).

9. A structure according to Claim 7, characterised by the fact that said means for displacing the support platform (43) radially with respect to the pivot (28) comprises an actuator cylinder (44) mounted on the support platform (43) and having a piston (46) the free end of which is fixed to the table (32), said support platform (43) being slidable relative to the table (32)



This is the replacement sheet

Date: 21 JUL 1997

by means of a pair of protuberances (42) which engage with guide elements (38) fixed to the table (32).

10. A machine for bending elongate elements (58), characterised by the fact that it includes a universal support and positioning structure for tools (56) according to any preceding Claim.



This is the replacement sheet

Date: 21 JUL 1997


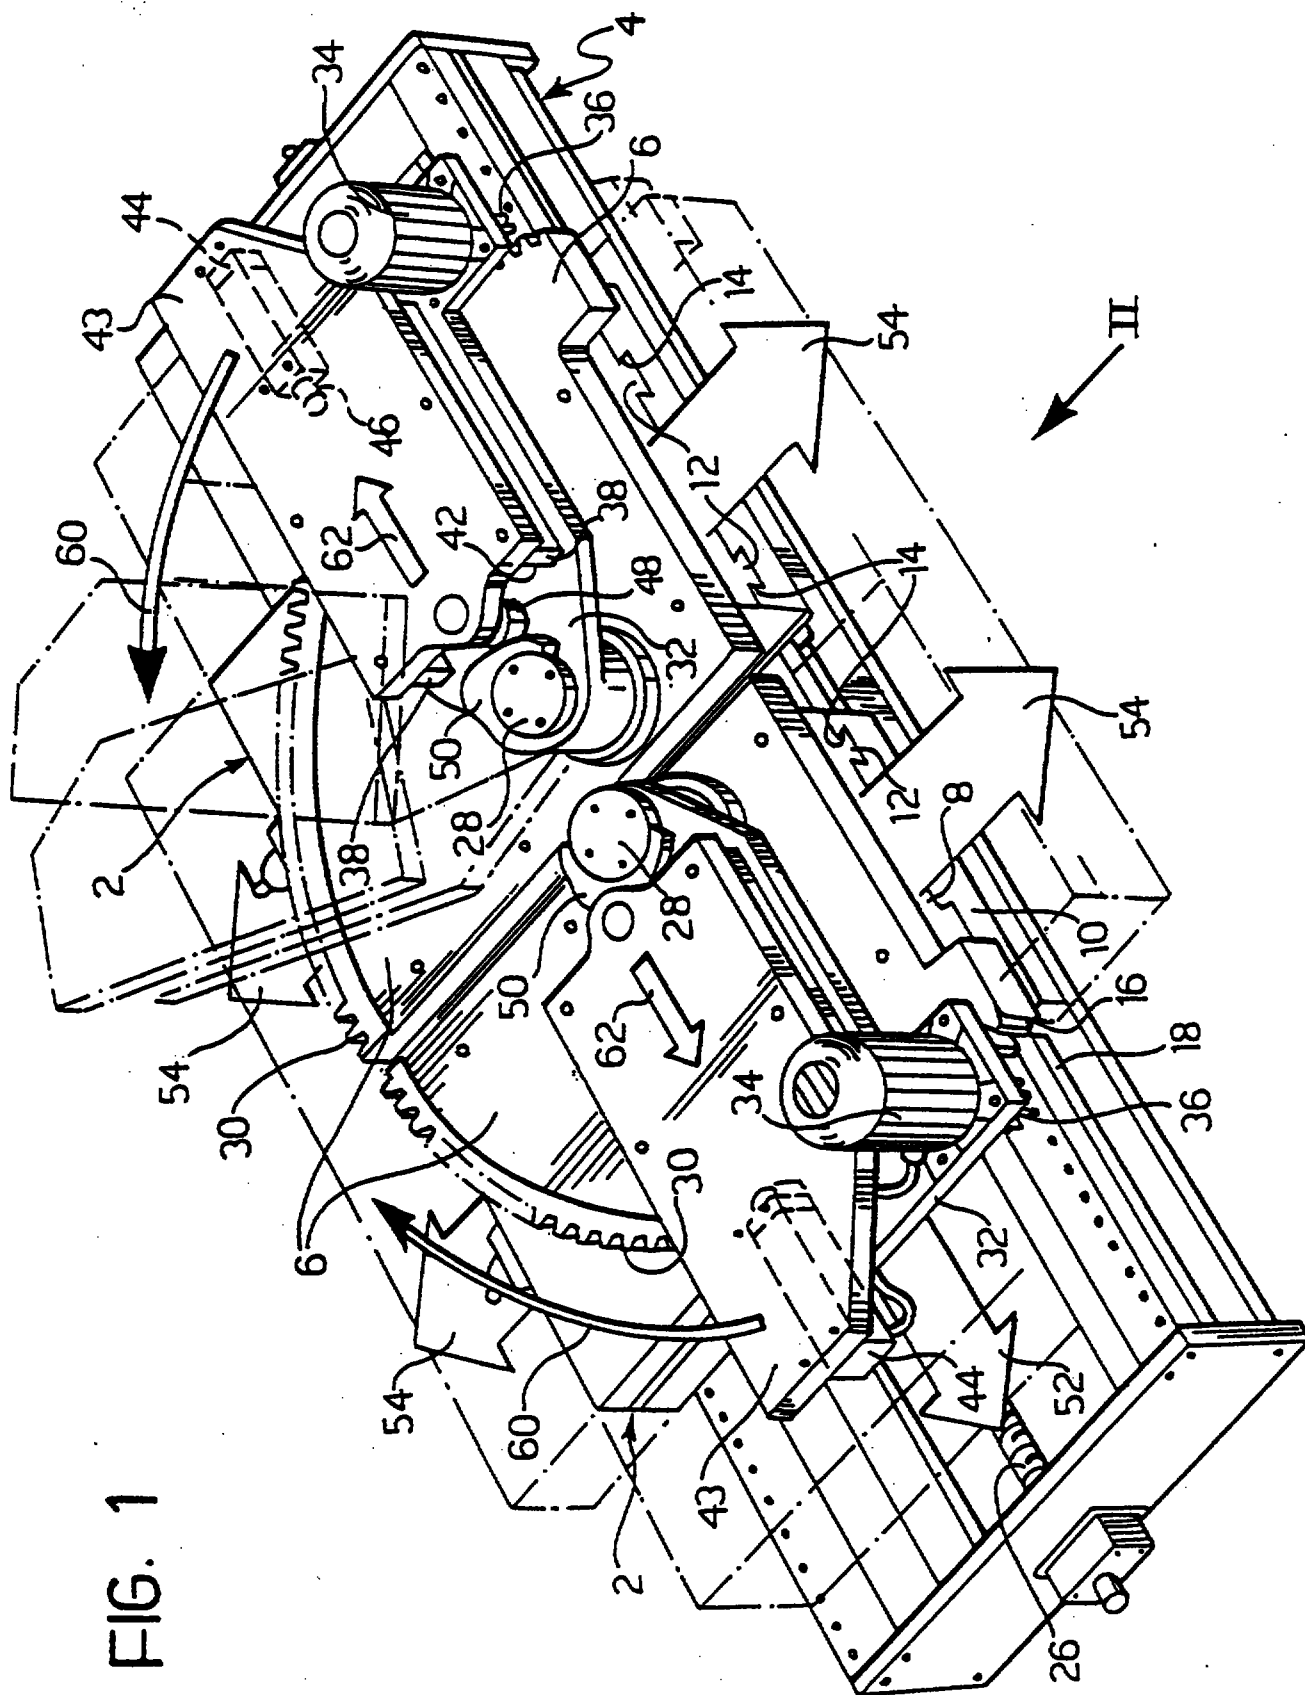


FIG. 1

This is the replacement sheet

Date: 21 JUL 1997


FIG. 2

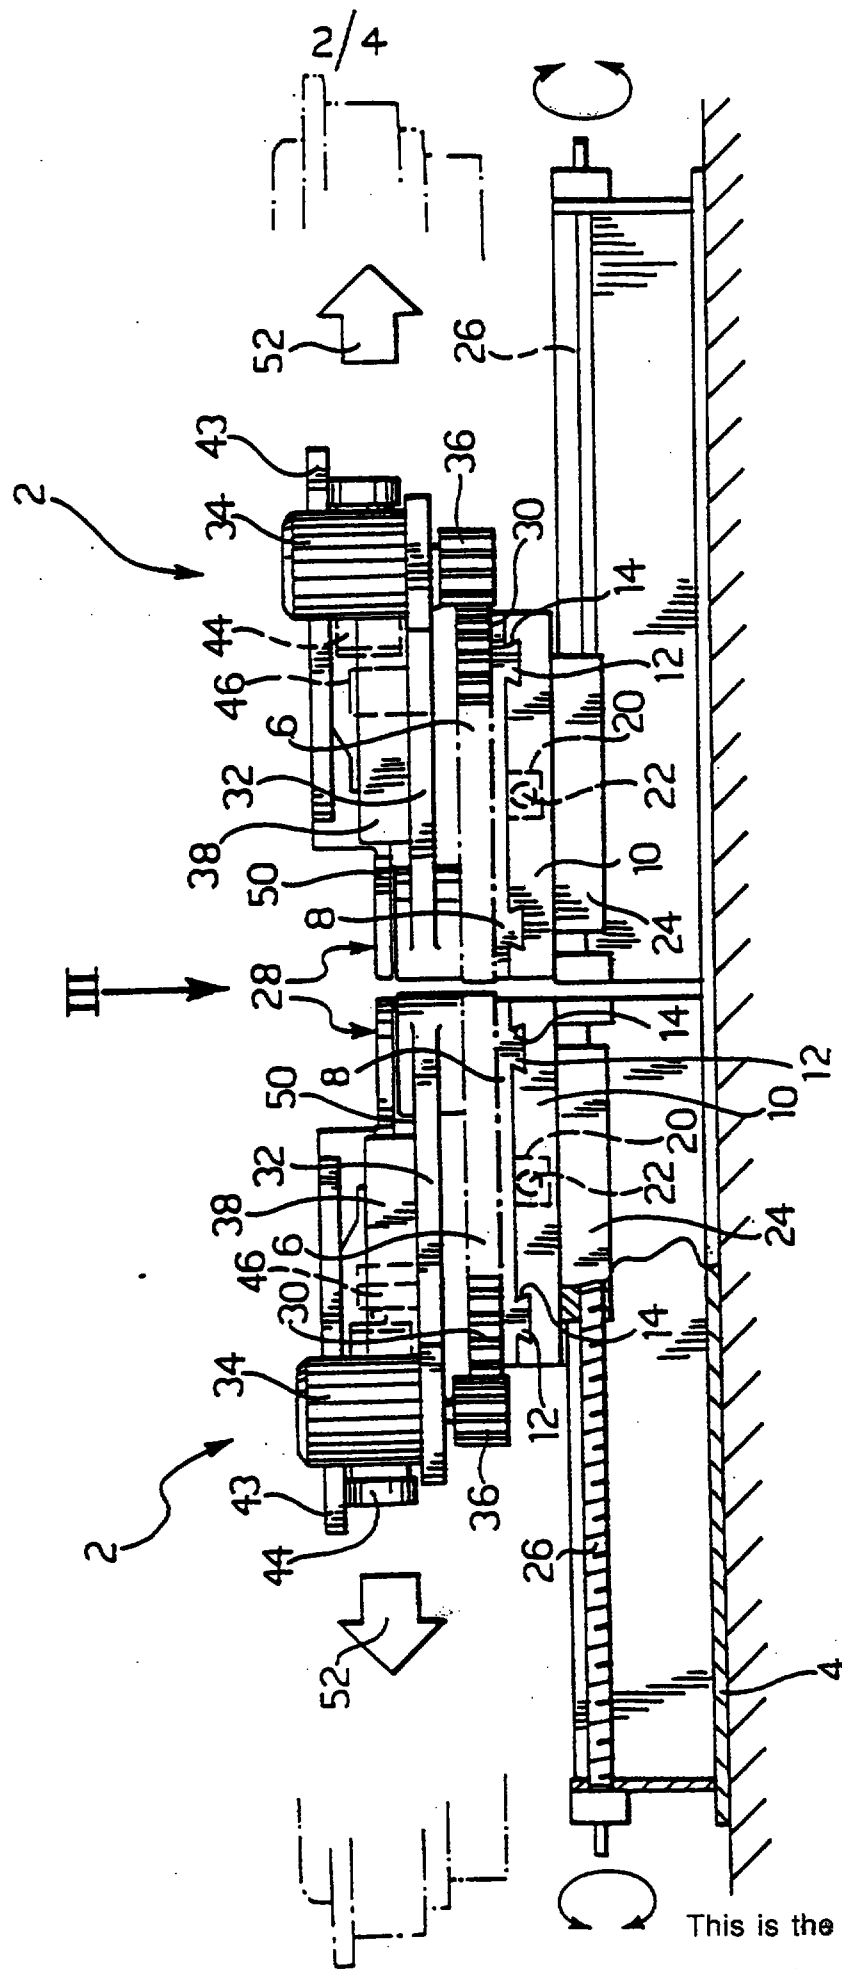

This is the replacement sheet

Date: 21 JUL 1997


FIG. 3

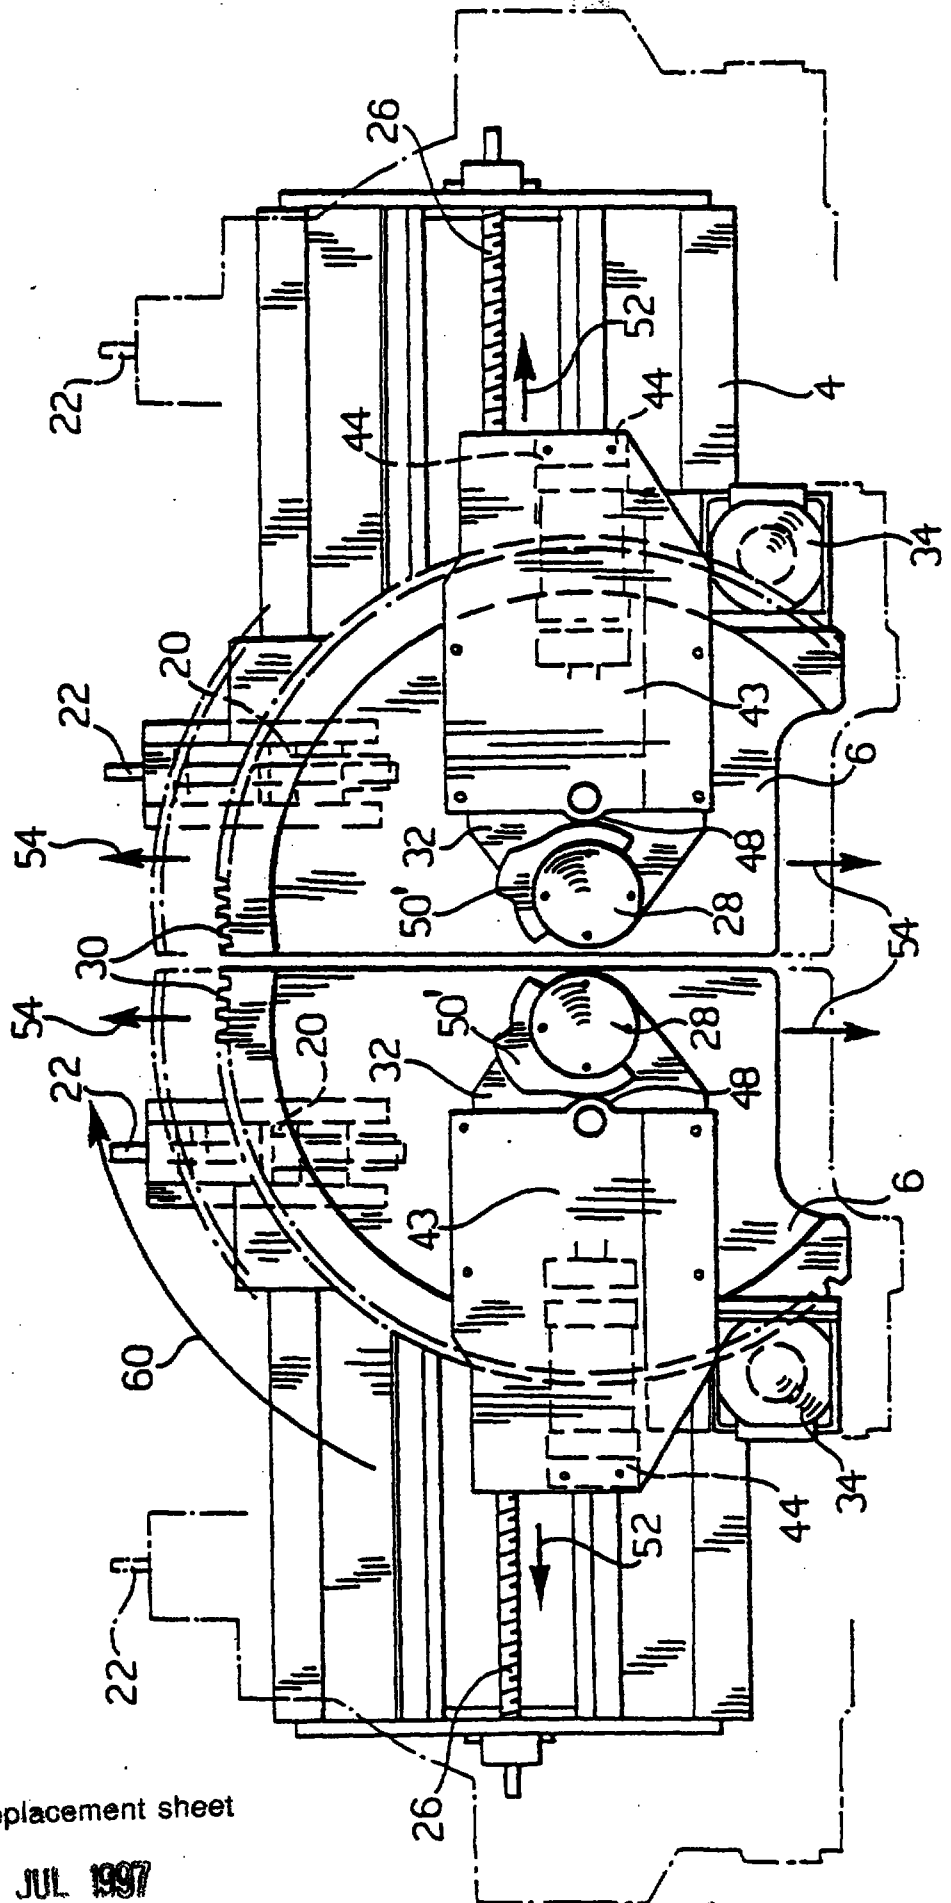

This is the replacement sheet

Date: 21 JUL 1997

FIG. 4

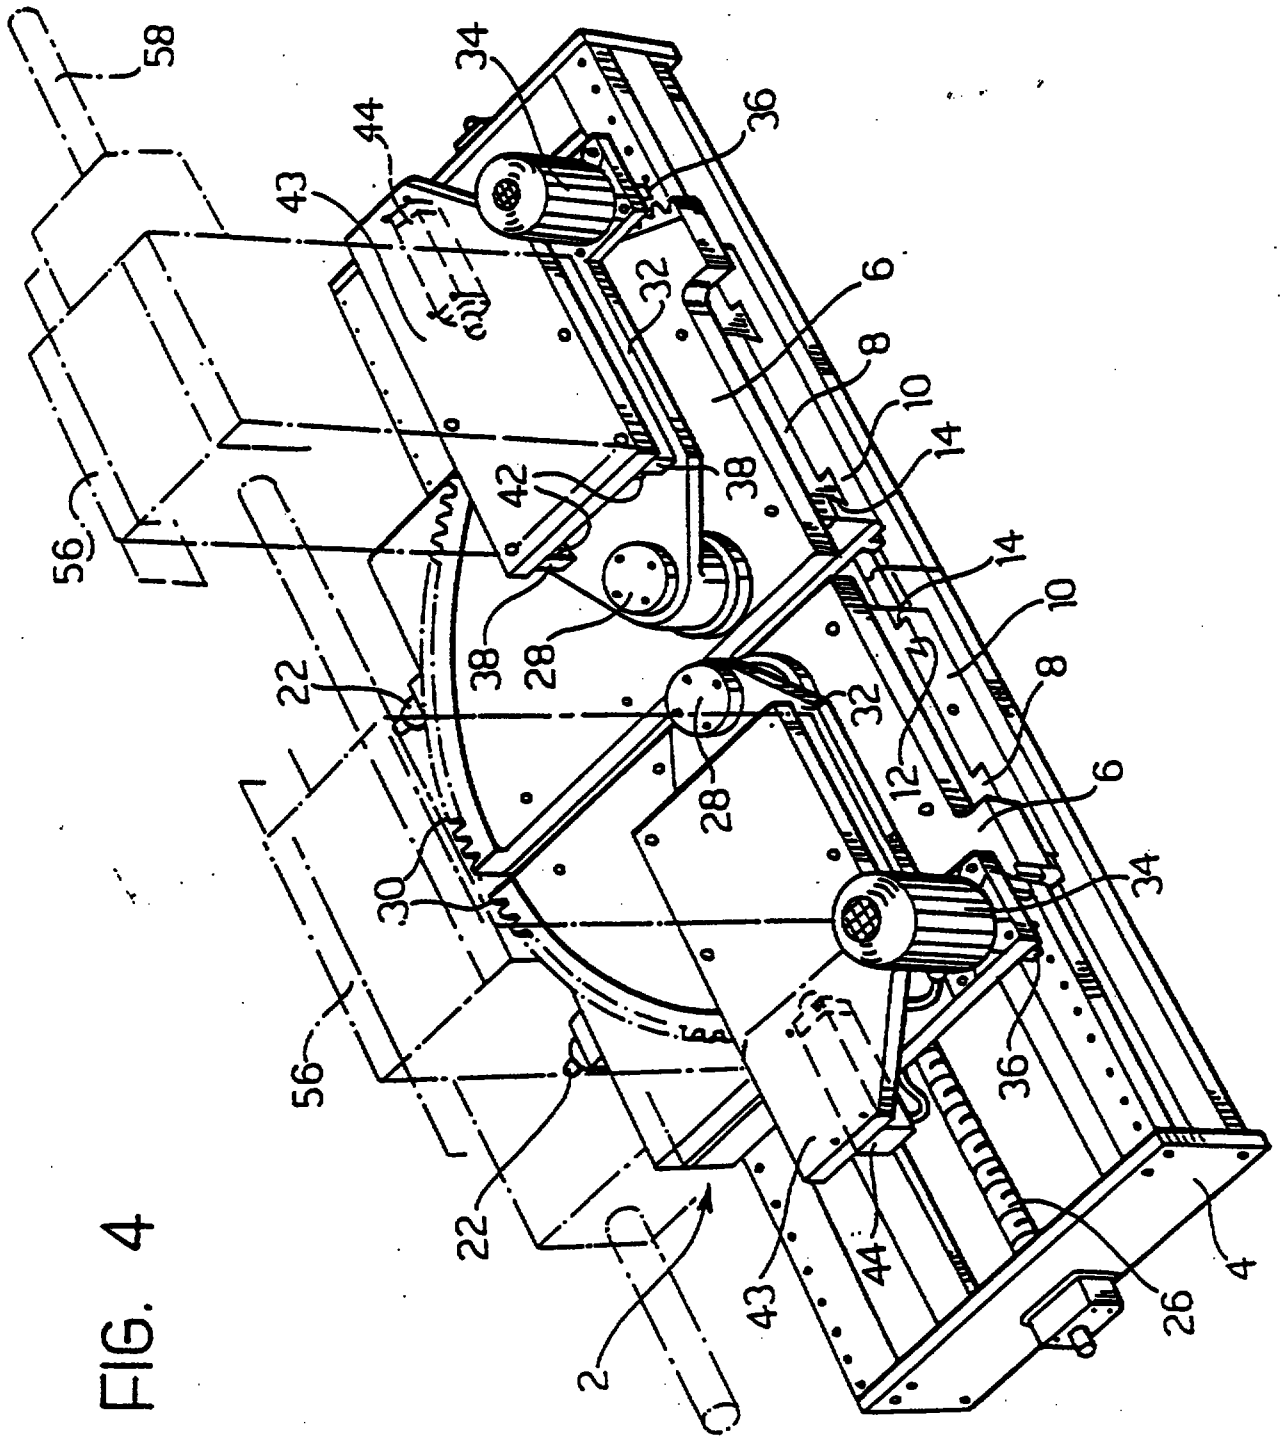

This is the replacement sheet

Date: 21 JUL 1997

**A UNIVERSAL SUPPORT AND POSITIONING STRUCTURE
FOR TOOLS USED BY AN ELONGATE ELEMENT BENDING MACHINE**

ABSTRACT

The universal positioning and support structure for tools (56) used by a machine for bending elongate elements (58) such as tubes or prolifed sections, includes at least one base bodyu (6) and a support platform (43) for said tools (56), movably mounted on the base body (6). The platform (43) is provided with means (30, 34, 36) for rotating it circumferentially and means (44-50) for contemporaneously displacing it radially with respect to a pivot (28) fixed to the base body (6).

Figure 1.

