


REPLACED SHEETS		SG
☒	Description : paged 1 to paged 3	U
☒	Claim(s) : paged 4 to paged 5	U
☒	Drawing(s) : paged 12 to paged 12/14	12/14
☒	Abstract : paged 16 to paged -	-
DATE OF RECEIPT		

1.

SHIELDED COMPACT DATA CONNECTOR

This Sheet Has Been Replaced



1 Field of the Invention

The present invention relates generally to improvements in shielded electrical data connectors. More particularly, the present invention relates to a compact design for a shielded electrical data connector wherein electrical contacts of the connector are electrically shielded from other components of the connector.

5 Background of the Invention

Improvements in the electrical data transmission industry, especially in the computer field, have resulted in the ability to transmit data along transmission lines at increasingly higher data rates. Further, similar improvements have also seen the decrease in the size of the equipment used in the industry. In order to function effectively with such equipment, the interconnection technology, such as the electrical cables and electrical connectors which connect such equipment, has also undergone significant improvements. Electrical connectors are now smaller and capable of transmitting data at higher rates between such components.

The requirement to make the electrical connectors smaller necessitates putting the conductive contacts of such connectors in closer proximity. However, when transmitting data at higher data rates, this physical proximity also increases the cross-talk levels between such electrical contacts. Accordingly, the industry has seen the need for improved shielding within the electrical connectors so as to reduce cross-talk levels in the smaller connectors working at higher data rates. This is especially prevalent in connectors used in closed-loop data systems which provide for continuity of signal in a multi-component system when

1 certain of the connectors are not interconnected. These
closed-loop systems employ connectors containing devices
which permit automatic shunting so that a closed-loop
connection is maintained even when a connector is in a non-
5 connected condition. Such shunting devices in these
connectors render effective shielding even more difficult.

It is, therefore, desirable to provide an electrical
connector which provides for shielding in a compact
connector design and which reduces cross-talk between
10 contacts of the connector when operating at higher data
rates.

Summary of the Invention

It is an object of the present invention to provide an
improved shielded electrical data connector.

15 It is a further object of the present invention to
provide a data connector of compact size which is operable
at higher data rates.

It is a still further object of the present invention
to provide a data connector having improved shielding which
20 reduces cross-talk between contacts of the connector.

It is an additional object to provide a shunted
electrical contact which reduces cross-talk between adjacent
contacts.

In the efficient attainment of these and other objects,
25 the present invention provides an electrical connector
including an electrically insulative contact support member
and at least one pair of vertically aligned electrical
contacts supported within the contact support member. The
vertically aligned pair of contacts includes an upper
30 contact having a depending deflectable shunt member. A
lower contact of the pair includes a shunt member engagement
element for engagement with a deflectable shunt member to
electrically shunt the upper contact of the pair to the
lower contact of the pair.

35 As more particularly described by way of the preferred
embodiment herein, the connector may be a hermaphroditic



1 connector including an insulative connector housing
configured for mating engagement with a like housing. The
housing has a front end, a contact support member and a rear
end. A pair of vertically stacked electrical contacts
5 includes an interconnection end adjacent the front end of
the housing and a terminal end adjacent the rear end of the
housing. The depending deflectable shunt member of the
upper contact is deflectable away from the shunt member
engagement element of the lower contact upon mating
10 engagement of the connector housing with the like housing.

Brief Description of the Drawings

Figure 1 is a front perspective showing of the compact
shielded data connector assembly of the present invention.

15 Figure 2 is a side-plan view of the connector assembly
of Figure 1.

Figure 3 shows, in exploded perspective view,
components of the connector assembly of Figures 1 and 2.

20 Figure 4 shows an electrical connector of Figure 1
interconnected with a like connector in hermaphroditic
fashion.

Figure 5 is a rear-perspective view of the outer
housing of the connector assembly of Figure 1.

25 Figures 6 and 7 are, respectively, exploded front and
rear perspective views of the insulative support member and
electrical contacts of the connector assembly of Figure 1.

Figure 8 is a perspective showing of alternative
constructions of the electrical contacts of the connector
assembly of Figure 1.

30 Figure 9 is a side-plan view of the alternative
contacts of Figure 8 supported within the terminal support
member.

Figure 10 is a perspective showing of an additional
electrical contact design useful in the connector of the
present invention.

35 Figure 11 is a side-plan view of the contacts of Figure
10 supported within an insulative housing.



1 Figure 12 shows in exploded perspective view the contacts of Figure 6 supported in a vertically stacked pair of insulative support members.

Detailed Description of the Preferred Embodiments

5 Referring to Figures 1 - 3, a shielded compact electrical data connector assembly 10 of the present invention is shown. Data connector assembly 10 is of the type used to transmit data signals between components of a closed-loop data system. Connector assembly 10 may function in hermaphroditic fashion, that is, it is interconnectable to a similarly formed electrical connector assembly, or it may function in a panel mount environment where plural such connector assemblies are supported on a wiring panel for connection with similarly formed electrical connectors.

15 The connector assembly 10 of the present invention may be of the type shown and described in our application EP-A-0610087 entitled VERTICALLY ALIGNED ELECTRICAL CONNECTOR COMPONENTS; which is incorporated by reference herein for all purposes.

20 Connector assembly 10 comprises an electrically conductive outer housing 12, a pair of side by side electrically insulative support members 14 and 16, upper and lower electrical contacts 18 and 20, respectively, an insulative rear-contact support 22 and a rear-conductive shield 24.

25 Conductive outer housing 12 and conductive rear shield 24 are formed in the preferred embodiment of die-cast metal. However, other conductive elements such as conductive plastic or metalized plastic may be employed. Support members 14 and 16, as well as contact support 22, are formed of a suitably electrically insulative plastic. Electrical contacts 18 and 20 are formed of a suitably conductive metallic material such as beryllium copper.



1 Referring additionally to Figure 5, outer conductive
housing 12 is shown in further detail. Outer housing 12 is
generally an elongate rectangular member having a front
interconnection end 26 and a rear contact accommodating end
5 28. Outer housing 12 is divided into four discrete
compartments 30 arranged in side by side and upper and lower
quadrants. Outer housing 12 includes a pair of opposed
spaced-apart vertical side walls 32 and a central vertical
dividing wall 34. A horizontal upper wall 38 extends across
10 the upper extents of side walls 32 and dividing wall 34.

Outer housing 12 further includes intermediate
horizontal bridge portions 40 extending between side walls
32 and dividing wall 34, as well as lower horizontal bridge
portions 42, which also extend between side walls 32 and
15 dividing wall 34. The construction of outer housing 12
provides for the complete perimetrical bounding of
compartments 30. It is contemplated that in the preferred
embodiment, the outer housing 12 will be integrally formed.
However, individual components may be used to make up outer
20 housing 12.

Referring now to Figures 6 and 7, terminal support
members 14 and 16, as well as upper and lower contacts 18
and 20, are shown in more detail. Support members 14 and 16
are preferably of identical construction. For clarity of
25 explanation, Figures 6 and 7 show only support member 14.
Support member 14 is generally an elongate molded plastic
member having a rear contact accommodating end 44, a central
main body portion 46 and upper and lower support platforms
48 and 50 extending oppositely from rear contact
30 accommodating end 44. Support member 14 includes a pair of
side by side upper channels 52 extending from rear contact
accommodating end 44 through central main body portion 46
and along upper support platform 48. Similarly, side by
side lower channels 54 extend from the rear contact
35 accommodating end 44 through central main body portion 46
and along lower support platform 50. Each support member 14
is divided into individual upper and lower stacked support



1 elements 14a and 14b which include upper and lower support
platforms 48 and 50, respectively. While support member 14
is shown to be integral, it is contemplated that the support
member may comprise separate upper and lower support
5 elements.

Support members 14 and 16 are shown to be side by side,
each having upper and lower support platforms 48 and 50.
However, other constructions of the terminal support members
are contemplated. Referring to Figure 12, the terminal
10 support members may be formed to be vertically stacked upper
and lower support members 70 and 72. Each of the support
members 70 and 72 is formed of insulative plastic and
respectively support contacts 18 and 20. Upper support
member 70 includes a terminal support platform 74 while
15 lower support member 72 includes a terminal support platform
76. Terminal support members 70 and 72 are configured to be
received within conductive outer housing 12 (Fig. 5) which
shields the individual contacts 18 and 20 supported therein
as will be described in further detail hereinbelow.

20 Referring again to Figures 6 and 7, also shown are
upper and lower electrical contacts 18 and 20 which are
typically stamped and formed members. Lower contacts 20
include a generally elongate base portion 20a, a pin-type
solder tail 20b and a reversely directed cantilevered spring
25 portion 20c which extends back over base portion 20a.
Solder tail 20b is of conventional construction and may be
inserted into a through hole of a printed circuit board (not
shown) and soldered thereto establishing electrical
connection therebetween. In the present illustrative
30 embodiment, solder tail 20b is shown extending downwardly at
a right angle from base portion 20a, however, straight-
solder tails may also be employed.

Cantilevered spring portion 20c is constructed so as to
be deflectable for movement toward and away from base
35 portion 20a upon interconnection of a further connection
device. Cantilevered spring portion 20c has an extended
beam length which extends toward solder tail 20b.



1 Upper contacts 18 are of construction similar to that
of contacts 20. Contacts 18 include an elongate base
portion 18a, a solder tail 18b and a reversely directed
cantilevered spring portion 18c of length shorter than
5 cantilevered spring portion 20c of contact 20. As contacts
18 and 20 are arranged in upper and lower fashion, solder
tail 18b of contacts 18 are longer than the solder tails 20b
of contacts 20 so that the distal extents 18h and 20h of the
solder tails extend approximately the same distance,
10 facilitating connection of the solder tails to a printed
circuit board.

As shown in Figures 6 and 7, upper contacts 18 include
a depending shunt member 18d which is struck from a central
extent of planar base portion 18a. The distal extent 18e of
15 shunt member 18d is engagable with the extended beam of
cantilevered spring portion 20c of contacts 20 to provide
for shunted engagement as between contacts 18 and 20. The
description of the shunting between contacts 18 and 20 is
described in further detail in the above-identified
20 incorporated reference. Shunt member 18d of contact 18
extends downwardly from base portion 18a at an angle just
less than 90°. Also, the distal extent 18e has a reversely
curved portion. Upon shunting engagement of shunt member
18d with cantilevered spring portion 20c, a wiping
25 engagement is achieved.

As shown in further detail in Figure 2, contacts 18 and
20 are supported within support member 14. Base portions
18a and 20a are supported respectively on platforms 48 and
50 through upper and lower channels 52 and 54. Solder tails
30 18b and 20b extend along rear contact accommodating end 44
of support member 14.

Support members 14 and 16 supporting upper and lower
contacts 18 and 20 are inserted into outer housing 12 in
side by side fashion. Each upper and lower support platform
35 48 and 50 of support members 14 and 16 are individually
accommodated in one of the bounded compartments 30 of outer
housing 12 (Fig. 5). Upper wall 38, side walls 32 and lower



1 bridge portions 42 serve to shield collectively the contact
18 and 20. Dividing wall 34 serves to shield each of the
side by side pairs of contacts 18 and 20. Intermediate
bridge portions 40 serve to shield the upper contacts 18
5 from the lower contacts 20. Thus, each pair of contacts
supported by each of the platforms, will be electrically
shielded from the contact pairs of the other platforms by
its residence in an individual bounded compartment 30.
Further, intermediate bridge portion 40 includes spaced
10 recesses 40a separated by a central protrusion 40b. Shunt
member 18d of each contact 18 extends through recess 40a.
The central protrusion 40b provides shielding as between
adjacent shunt member 18d.

15 Referring again to Figures 2 and 3, the shielding of
contacts 18 and 20 is continued at the contact accommodating
end 28 of housing 12 by rear shield 24. Shield 24, formed
of conductive metal, includes a short forward wall 56 and a
taller rear wall 58 separated by a centrally located
transverse web 60. Shield 24 provides conductive shielding
20 as between solder tails 18b of upper contacts 18 and solder
tails 20b of lower contacts 20. This is achieved by
positioning solder tail 20b on one side of forward wall 56
while solder tails 18b are positioned on the other side of
forward wall 56. Solder tails 18b reside between walls 56
25 and 58.

In order to support solder tails 18b of contacts 18,
connector assembly 10 includes insulative contact support
22. Contact support 22 is a plastic member having a front
wall 62, a taller rear wall 64 and individual chambers 66,
30 which individually accommodate solder tails 18b of contacts
18. Contact support 22 includes a recess 68 extending from
a lower edge thereof which accommodates web 60 of shield 24
when contact support 22 is inserted within shield 24.

35 In operation, once the support members 14 and 16
supporting contacts 18 and 20 are inserted into outer
housing 12, shield 24, having contact support 22 inserted
therein, may be inserted over the solder tails 18b of

This Sheet Has Been Replaced



1 contacts 18 to reside adjacent contact accommodating end 28
of outer housing 12.

Referring to Figure 4, connector assembly 10 is shown
interconnected to an identical connector 10' in
5 hermaphroditic fashion. This is accomplished by rotating
connector assembly 10' 180° and interconnecting the two
parts so that upper contacts 18 of connector assembly 10
engage lower contacts 20' of connector assembly 10', while
lower contacts 20 of connector assembly 10 engage upper
10 contacts 18' of connector assembly 10'. It is noted that as
the lower contacts of one connector engage the upper
contacts of the other connector when connected in
hermaphroditic fashion, the electrical path between each
pair of the mated contacts will be the same for all contact
15 pairs. Thus the electrical path length between the tip 18h'
of solder tail 18b' and the tip 20h of solder tail 20b,
which is connected thereto, is the same as the path length
between the tip 18h of solder tail 18b and the tip 20h' of
solder tail 20b' of another connected pair of contacts. By
20 creating identical electrical path lengths, impedance
mismatch is reduced as between mated pairs of contacts.

Referring to Figures 4 and 7, another feature of the
present invention may be described. Cantilevered spring
portions 18c and 20c of upper and lower contacts 18 and 20
25 further provide a first upwardly inclined contact surface 70
extending from the front end of the contacts to a centrally
located apex 72. The contact further includes a depending
rearwardly facing engagement surface 74 extending from apex
72 down to the distal end of the contacts. As
30 hermaphroditic connection is made as shown in Figure 4, the
first contact surfaces of the mating contacts will ride
against each other until the apices of the respective
contacts bypass one another. The inherent spring bias of
cantilevered spring portion 18c and 20c permit such
35 engagement. Once the apices are bypassed, the depending
engagement surfaces 74 will engage in locking fashion. Thus
the mechanical engagement of the mated contacts of the



1 hermaphroditic connectors will serve, to some degree, to
lock the contacts together thereby locking the respective
connectors together. This locking feature also assures
proper connection of connector assembly 10 to connector
5 assembly 10'.

Further embodiments of the present invention may be
shown in Figures 8 and 9. Contacts of the present invention
include solder type tails 18b and 20b such as shown in
contacts 18 and 20 for attachment to through holes of a
10 printed circuit board. However, the present invention also
contemplates employing other contact types 76 and 78, which
include IDC portions 76a and 78a for making insulation
displacing connection to electrical conductors (not shown)
in a manner described in the above-incorporated patent
15 application. IDC portions 76a and 78a may extend at
oppositely directed 90° angles from the central base
portions 76b and 78b of contacts 76 and 78. Figure 9 shows
such insulation displacement contacts 76 and 78 supported in
a support member 14.

20 Additionally, since support members 14 and 16 may be
inserted into outer housing 12 in a modular fashion,
connector assembly 10 of the present invention may
accommodate different transmission styles within the same
connector assembly. While the present embodiment shows
25 transmission terminal devices of the electrical signal type,
other terminals, such as fiber optic terminations and power
contacts, may be inserted into connector assembly 10. It is
further contemplated that the transmission terminal device
may be the stamped end of a co-axial cable where the center
30 conductor serves as an electrical contact. Support members
14 and 16 can be adapted to accommodate such co-axial cable.
Thus, connector assembly 10 may house mixed transmission
components.

Referring now to Figure 10, alternative construction of
35 the contacts 18 and 20 (Fig. 8) are shown. For
simplification of description, similar reference numerals
will be used to note similar components.



1 Contacts 118 and 120 are typically stamped and formed
of conductive metal. Lower contact 120 includes a generally
elongate base portion 120a, a pin-type solder tail 120b and
a reversely directed cantilevered spring portion 120c, which
5 extends back towards base portion 120a. Tail 120b and
reversely bent cantilevered spring portion 120c function in
a manner similar to that described above with respect to
contact 20. Cantilevered spring portion 120c has a shorter
extent than cantilevered spring portion 20c of contact 20.
10 Upper contact 118 includes an elongate base 118a, a solder
tail 118b and a reversely directed cantilevered spring
portion 118c.

 In order to achieve shunted electrical connection
between upper contact 118 and lower contact 120, upper
15 contact 118 includes a depending shunt member 118d, which is
struck from a central extent of planar base portion 118a.
In the present illustrative embodiment, shunt member 118d is
formed to be a deflectable cantilevered beam which deflects
from the position shown in Figure 10 to a position upwardly
20 toward base portion 118a. As will be described in further
detail hereinbelow, shunt member 118d is deflectable upon
hermaphroditic mating connection of the connectors housing
contacts 118.

 In order to facilitate the establishment of shunted
25 electrical engagement between contact 118 and contact 120,
contact 120 includes an upwardly extending protrusion 120d,
forming an engagement surface for shunt member 118d.
Protrusion 120d is struck from a central extent of planar
base portion 120a. Protrusion 120d has a distal extent
30 120e, which is engagable with a distal extent 118e of shunt
member 118d. This engagement establishes electrical
connection between contact 118 and contact 120. Shunt
member 118d is deflectably movable away from protrusion 120d
to break the connection between contacts 118 and 120.

35 Referring now to Figure 11, a connector assembly 110 is
shown interconnected to an identical connector assembly
110'. The rendering in Figure 11 is substantially similar



1 to that of Figure 4. However, connector assemblies 110 and
110' include the contacts 118 and 120 shown in Figure 10.
As connector assemblies 110 and 110' are identical
hermaphroditic connectors, connection may be accomplished by
5 rotating connector assembly 110' 180° and interconnecting
the two components so that the upper contacts 118 of
connector assembly 110 engage lower contacts 120' of
connector assembly 110', while lower contacts 120 of
connector assembly 110 engage upper contacts 118' of
10 connector assembly 110'. The connection is achieved in a
manner shown and described above with respect to Figure 4.

The insulative housing 114 supporting contacts 118 and
120 includes upper and lower platforms 148 and 150
respectively. A forward end of upper platform 148 includes
15 a shunt member deflection portion 125. Shunt member
deflection portion 125 extends beyond the forward end of
upper platform 148 so as to engage shunt member 118d' of
corresponding connector 110'.

As shown in Figure 11 upon interengagement of connector
20 assembly 110 with connector assembly 110', shunt member
deflection portion 125 contacts and engages shunt member
118d' of contact 118' deflecting it back away from
protrusion 120d' to break the shunted electrical engagement
between the components. Similarly, upon interconnection,
25 shunt member deflection portion 125' of connector assembly
110' engages shunt member 118d, breaking its shunted
connection with protrusion 120d. Thus upon electrical
interengagement of connector assembly 110 with connector
assembly 110', shunted engagement of contacts 118 and 120
30 and 118' and 120' is broken, and upon disconnection of
connector assembly 110 to connector assembly 110', the
shunted engagement of those contacts is reestablished.

It has been found that the arrangement shown in Figures
10 and 11 provides superior results, especially with respect
35 to the adverse effects of cross-talk as between the upper
and lower contacts of each connector assembly.



1

Various changes to the foregoing described and shown structures would now be evident to those skilled in the art. Accordingly, the particularly disclosed scope of the invention is set forth in the following claims.

This Sheet Has Been Replaced



CLAIMS

1 1. An electrical connector comprising:
 an electrically insulative contact support member; and
 at least one pair of vertically aligned electrical
5 contacts supported within the contact support member; said
 vertically aligned pair of contacts including an upper
 contact having a depending deflectable shunt member, and a
 lower contact having a shunt member engagement element for
9 engagement with said deflectable shunt member to
 electrically shunt said upper contact to said lower contact.

1 2. An electrical connector of claim 1 wherein said
 shunt member engagement element includes an upwardly
3 extending protrusion.

1 3. An electrical connector of claim 1 or claim 2
 wherein each said contact includes an interconnection end
 for electrical engagement with a contact of a mating
4 connector and a terminal end opposite said interconnection
 end.

1 4. An electrical connector of claim 3 wherein said
 depending deflectable shunt member of said upper contact is
 positioned between said interconnection end and terminal end
 thereof and wherein said upwardly extending protrusion of
5 said lower contact is positioned between said
6 interconnection end and said terminal end thereof.

1 5. A hermaphroditic electrical connector comprising:
 an insulative connector housing configured for mating
 engagement with a like housing, said housing having a front
 end, a support member for supporting electrical contacts,
5 and a rear end; and

 a pair of vertically aligned electrical contacts
 supported by said housing support member, an upper contact
 of said pair having a depending deflectable shunt member and
9 a lower contact of said pair having a shunt member



10 engagement element engagable with said depending deflectable
shunt member for electrically shunting said upper contact to
said lower contact,

said depending deflectable shunt member of said upper
contact being deflectable away from said shunt member
15 engagement element of said lower contact upon mating
16 engagement of said connector housing with said like housing.

1 6. A hermaphroditic electrical connector of claim 5
wherein said contacts have an interconnection end adjacent
said front end of said housing and a terminal end adjacent
4 said rear end of said housing.

1 7. A hermaphroditic electrical connector of claim 6
wherein said depending deflectable shunt member of said
upper contact is positioned between said interconnection end
4 and said terminal end thereof.

1 8. A hermaphroditic electrical connector of claim 7
wherein said front end of said housing includes a shunt
member deflection portion and wherein upon said mating
engagement of said housing with said like housing said shunt
5 member deflection portion of said like housing deflects said
shunt member away from said shunt member engagement member
7 of said lower contact.

This Sheet Has Been Replaced




ABSTRACT
SHIELDED COMPACT DATA CONNECTOR

An electrical connector (10) provides for selective
5 shunting as between contacts of the connector. The
connector includes a pair of vertically aligned electrical
contacts (18, 20) supported within an electrically
insulative housing (14). The housing (14) is configured for
mating engagement with a like housing for hermaphroditic
10 interconnection. The upper contact of the pair includes a
depending deflectable shunt member (18d) and the lower
contact of the pair includes a shunt member engagement
element for electrically shunting the pair of contacts. The
shunt member is deflectable away from the shunt member
15 engagement element upon the mating engagement of the housing
with the like housing.


This Sheet Has Been Replaced



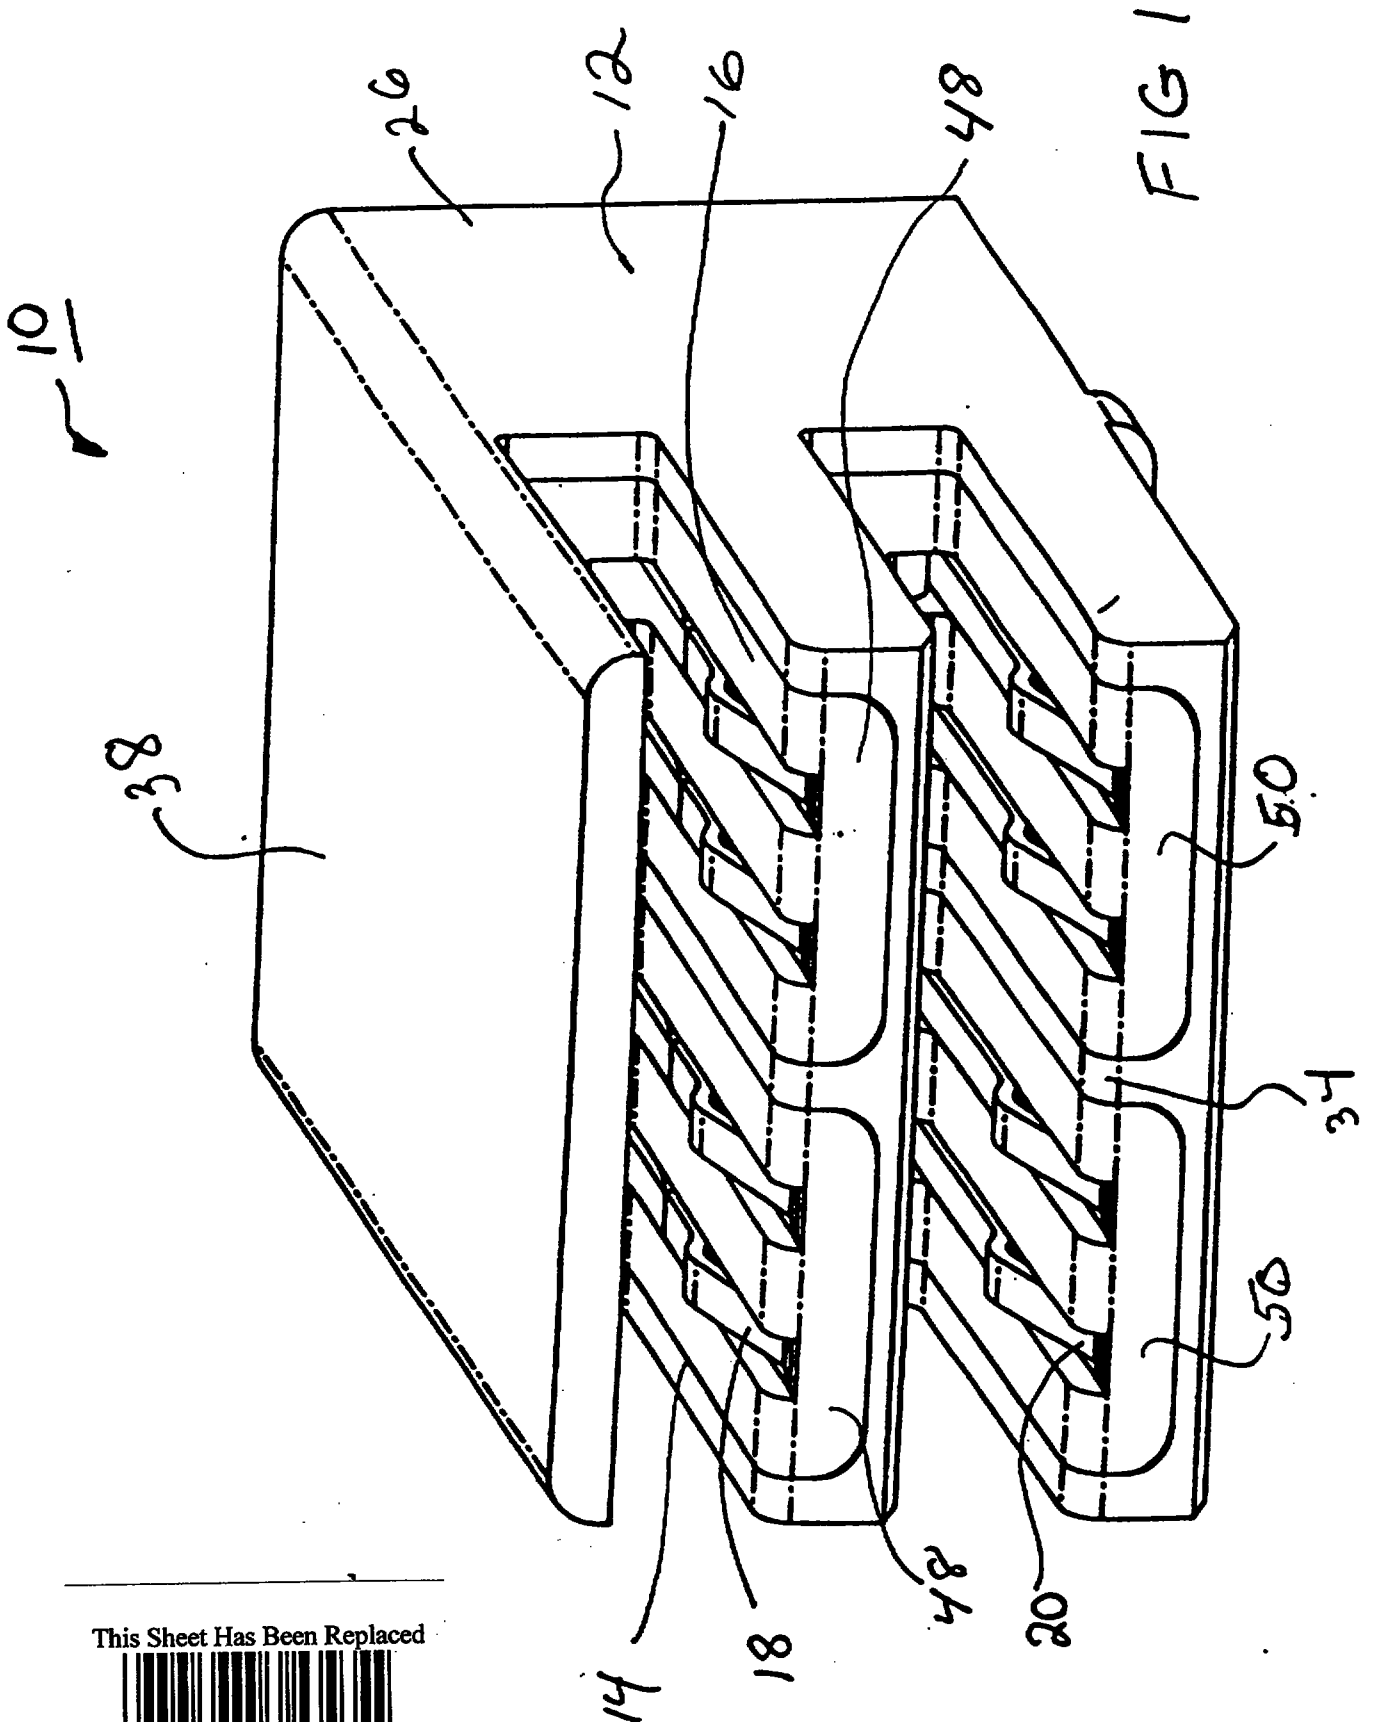

This Sheet Has Been Replaced




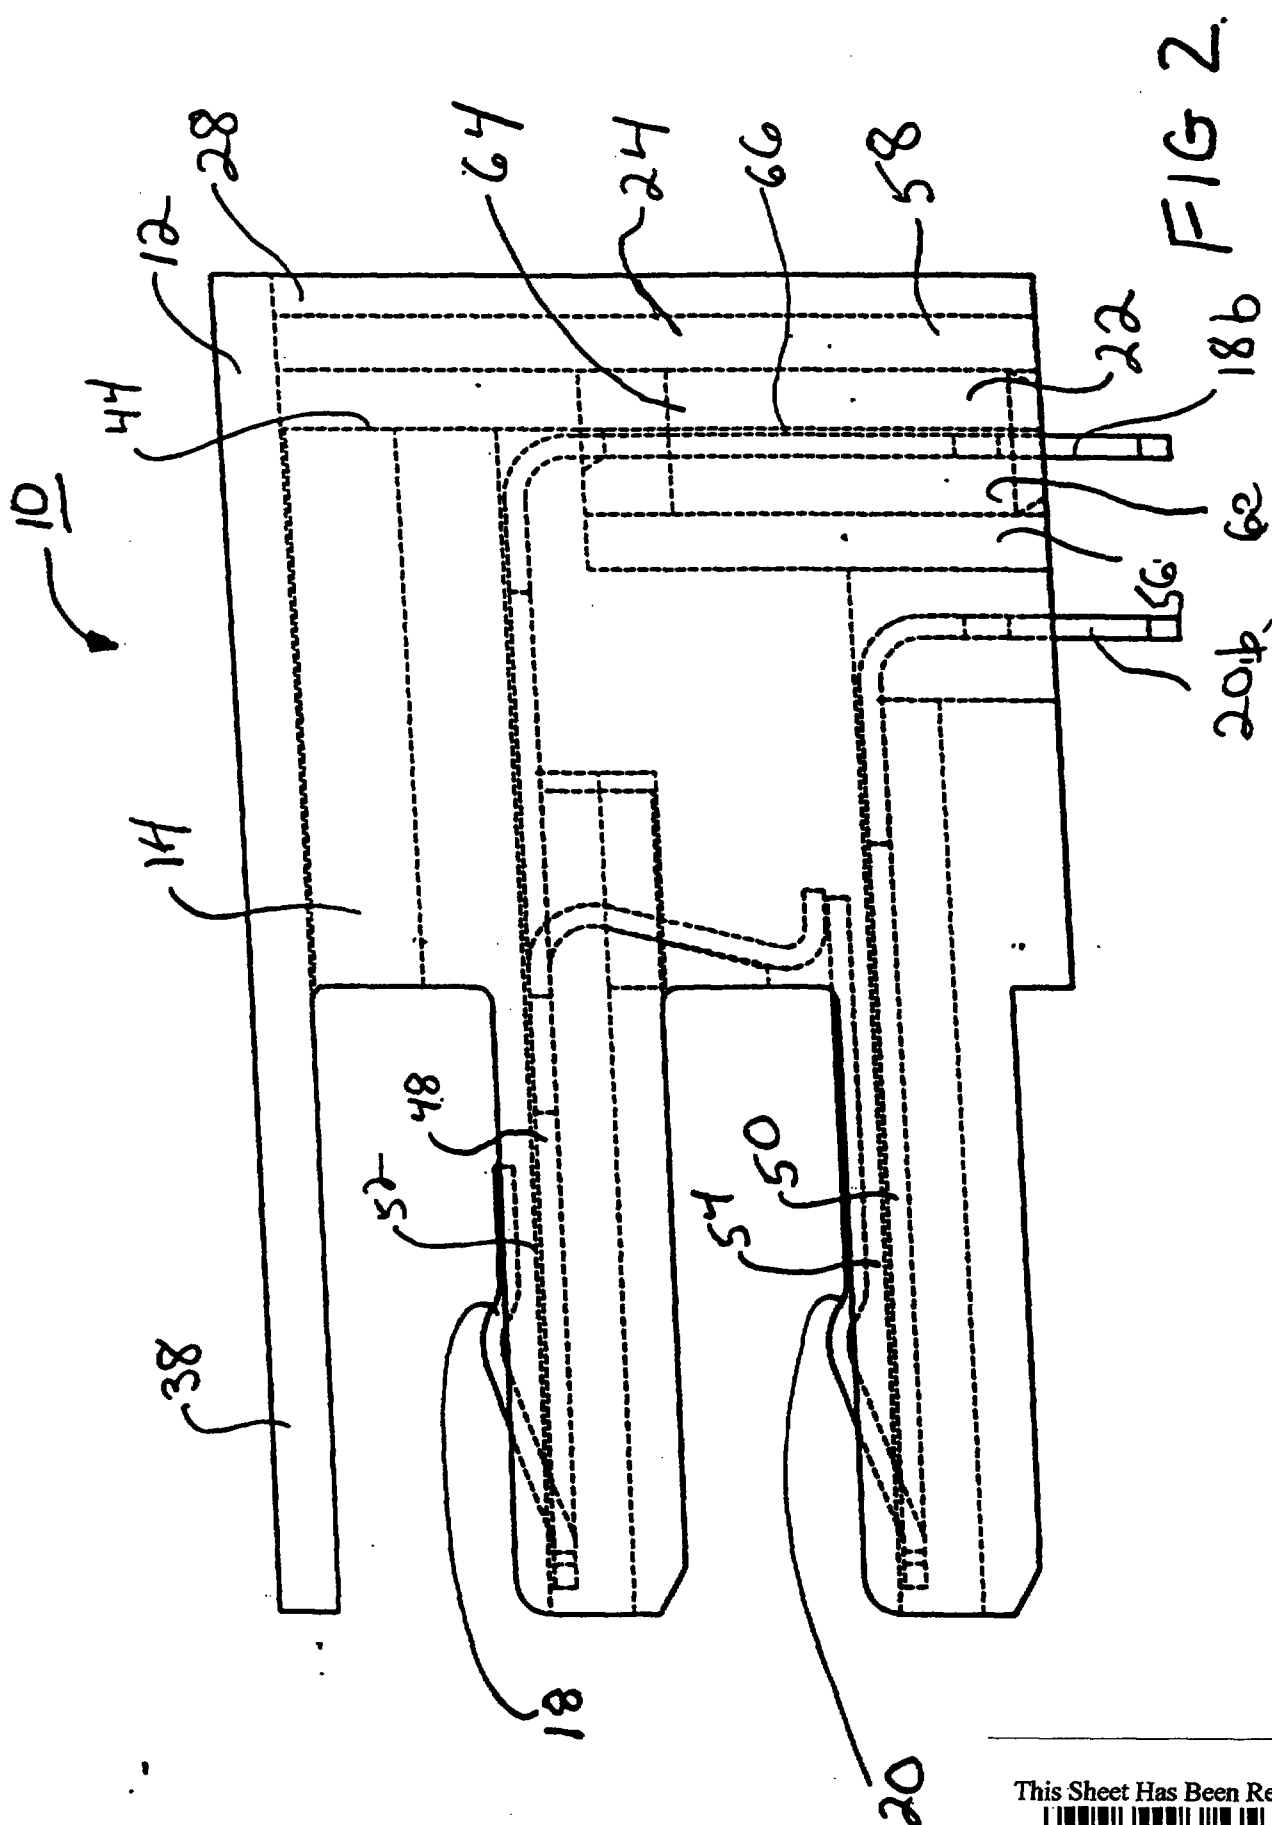

This Sheet Has Been Replaced




FIG 3

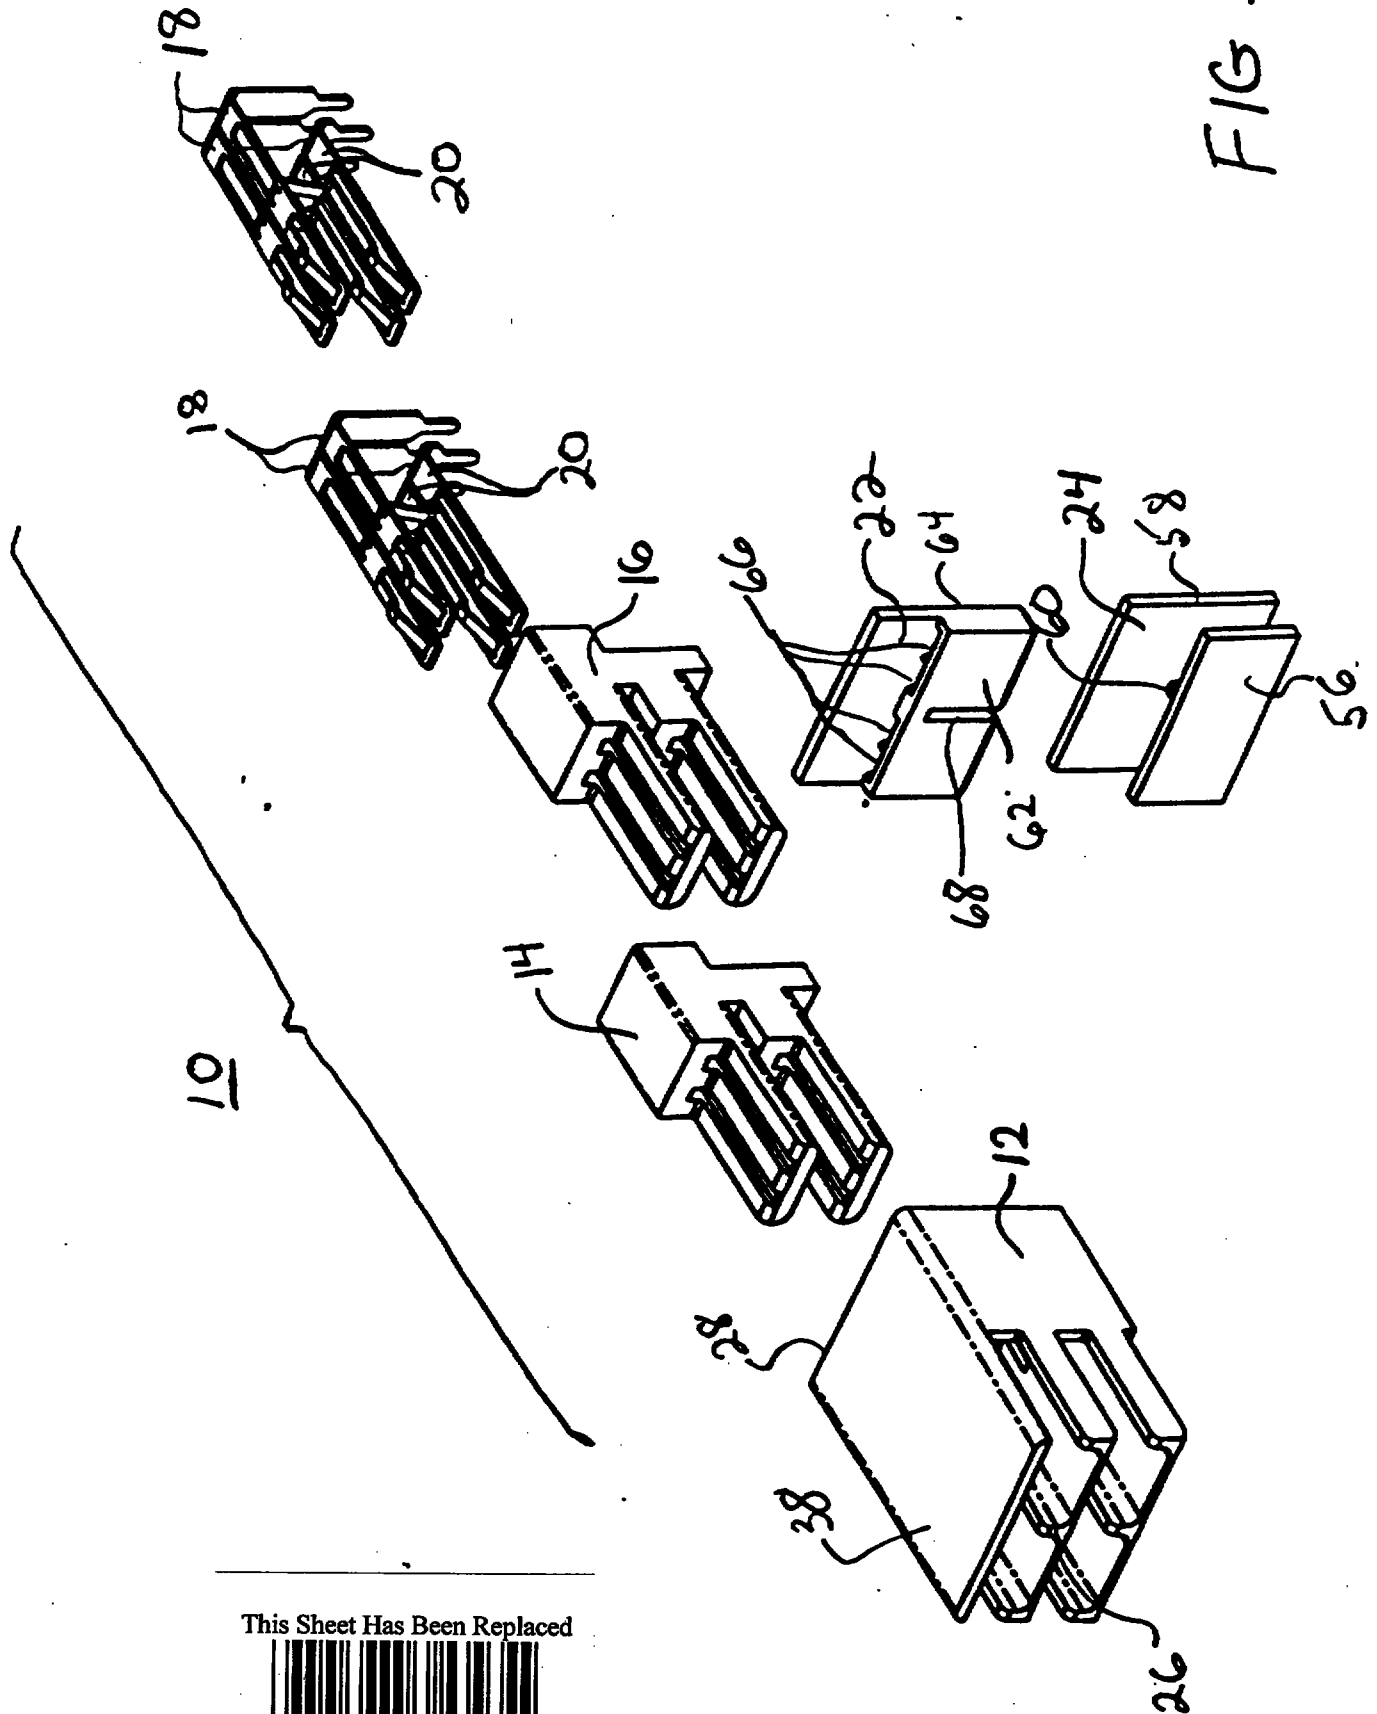


This Sheet Has Been Replaced



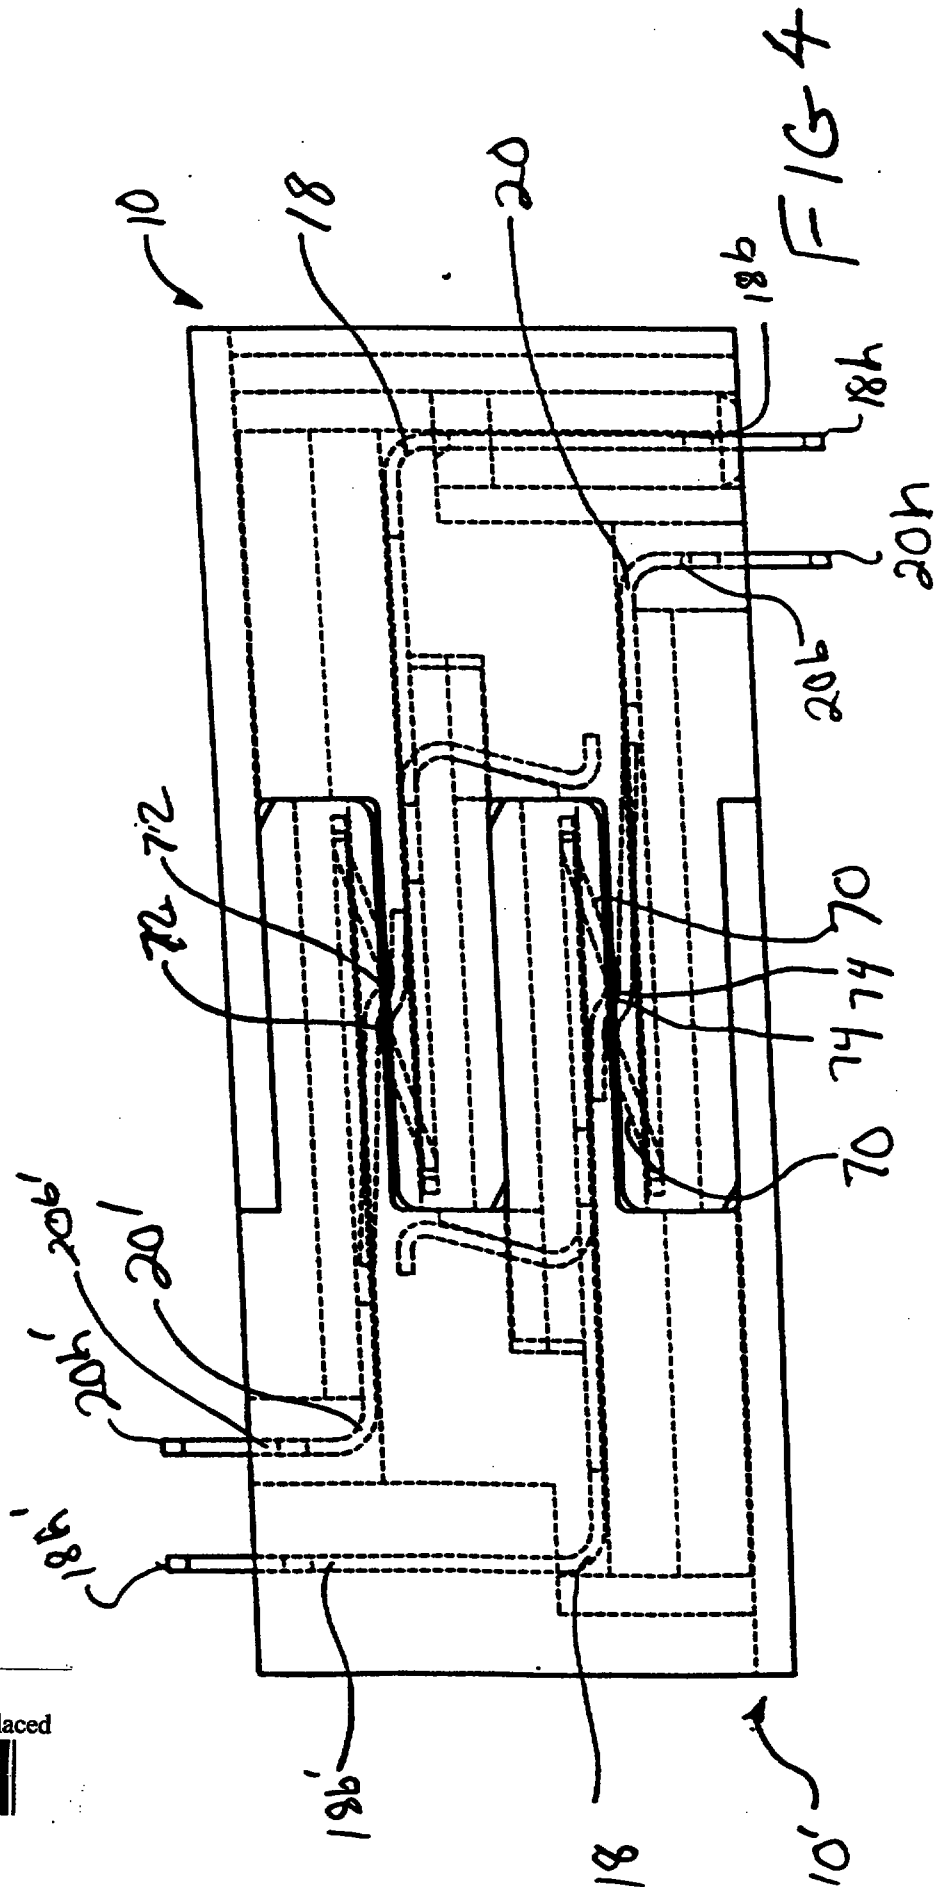

This Sheet Has Been Replaced



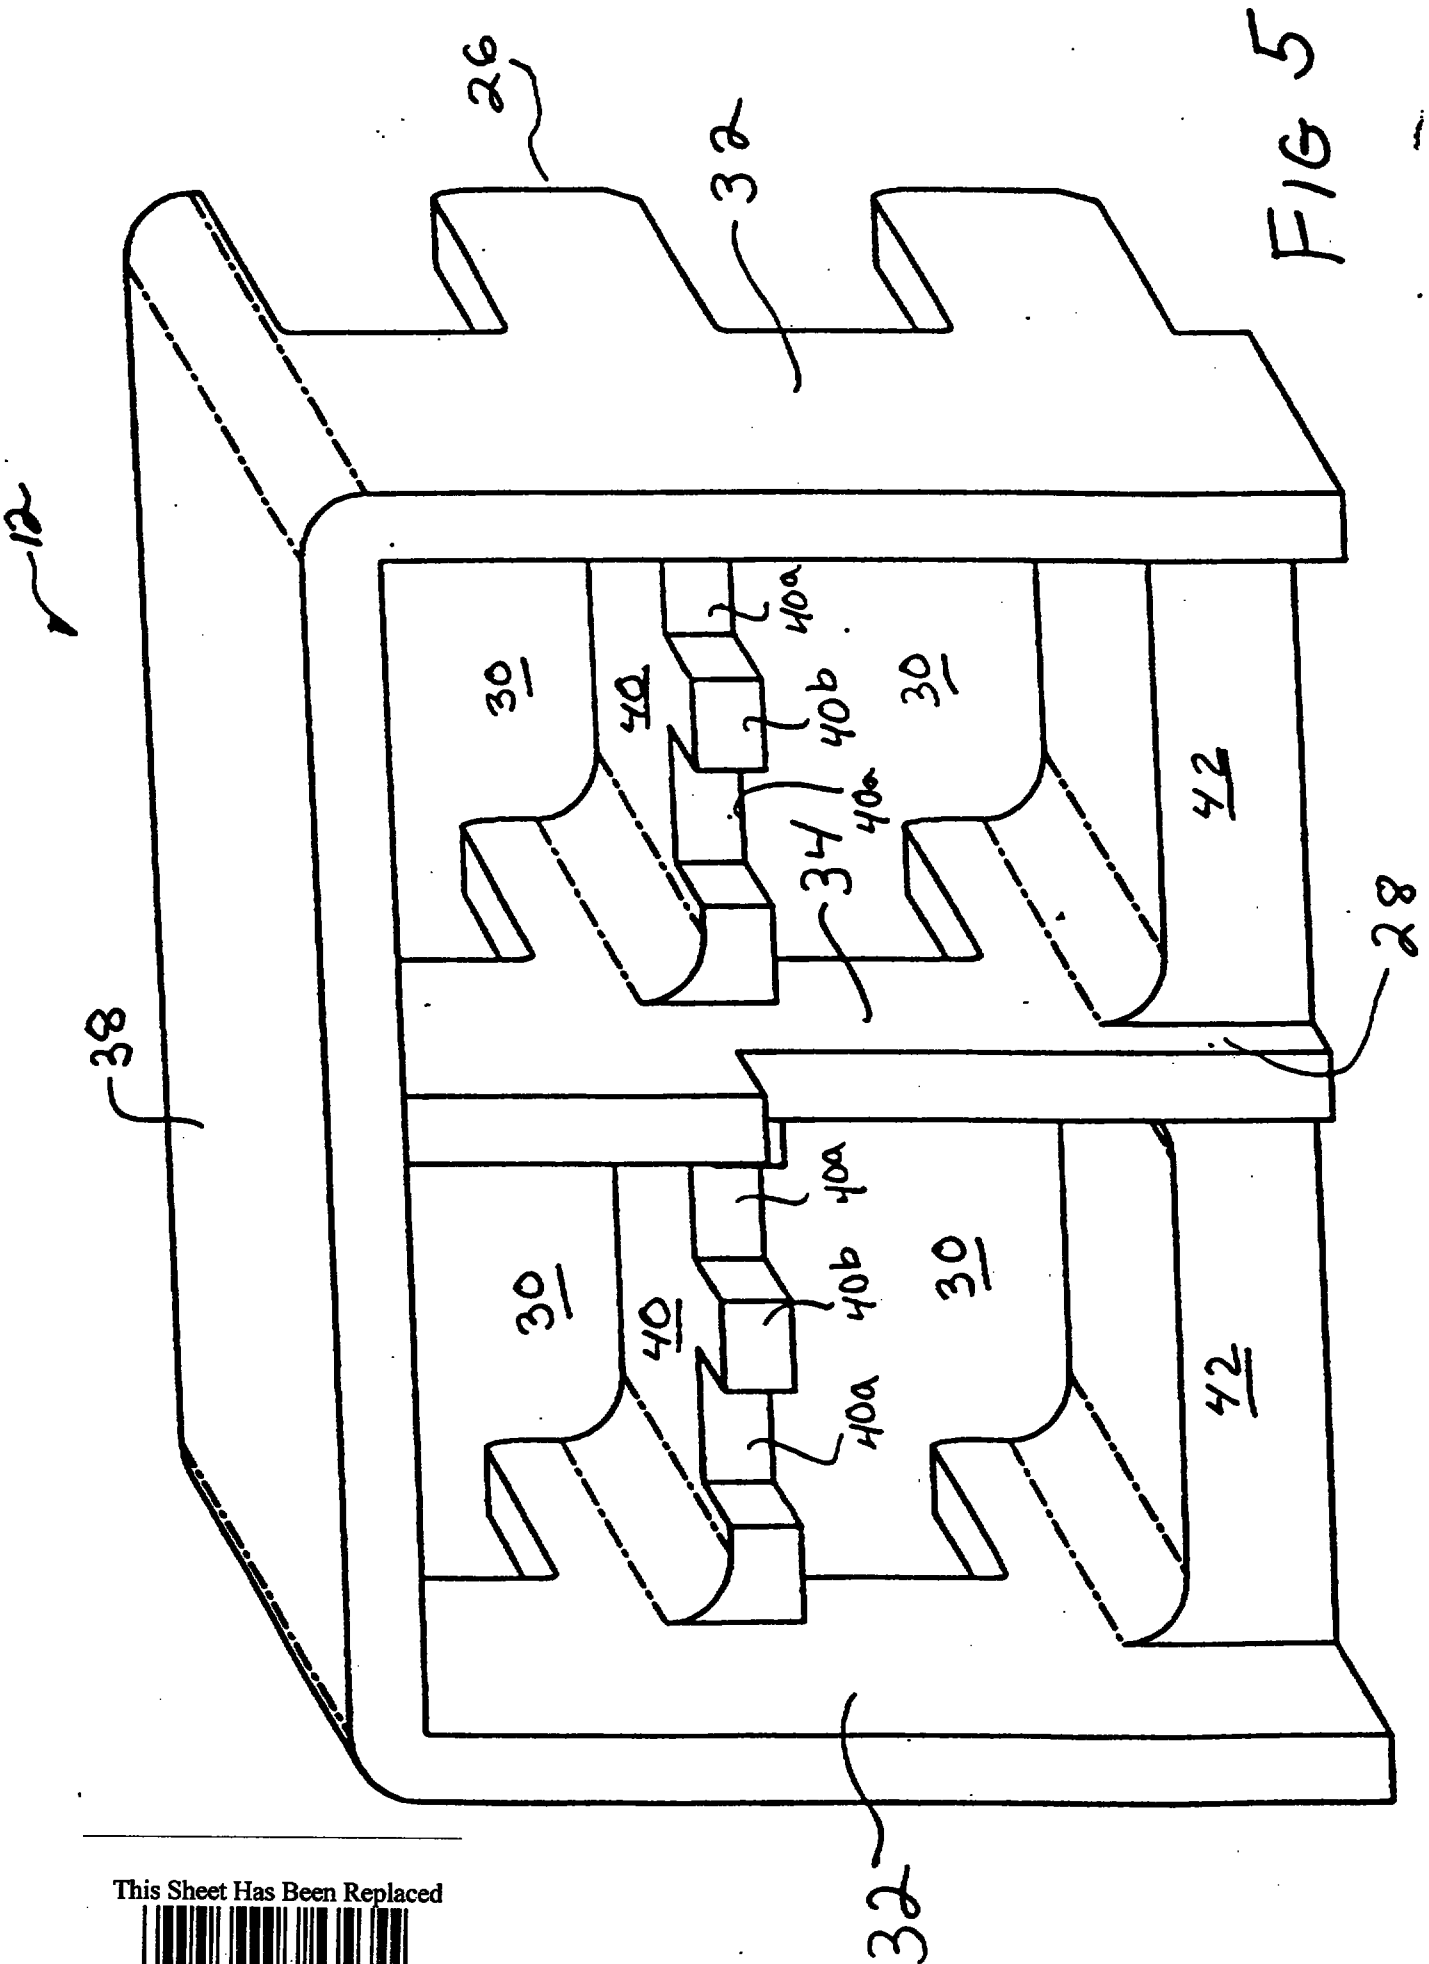


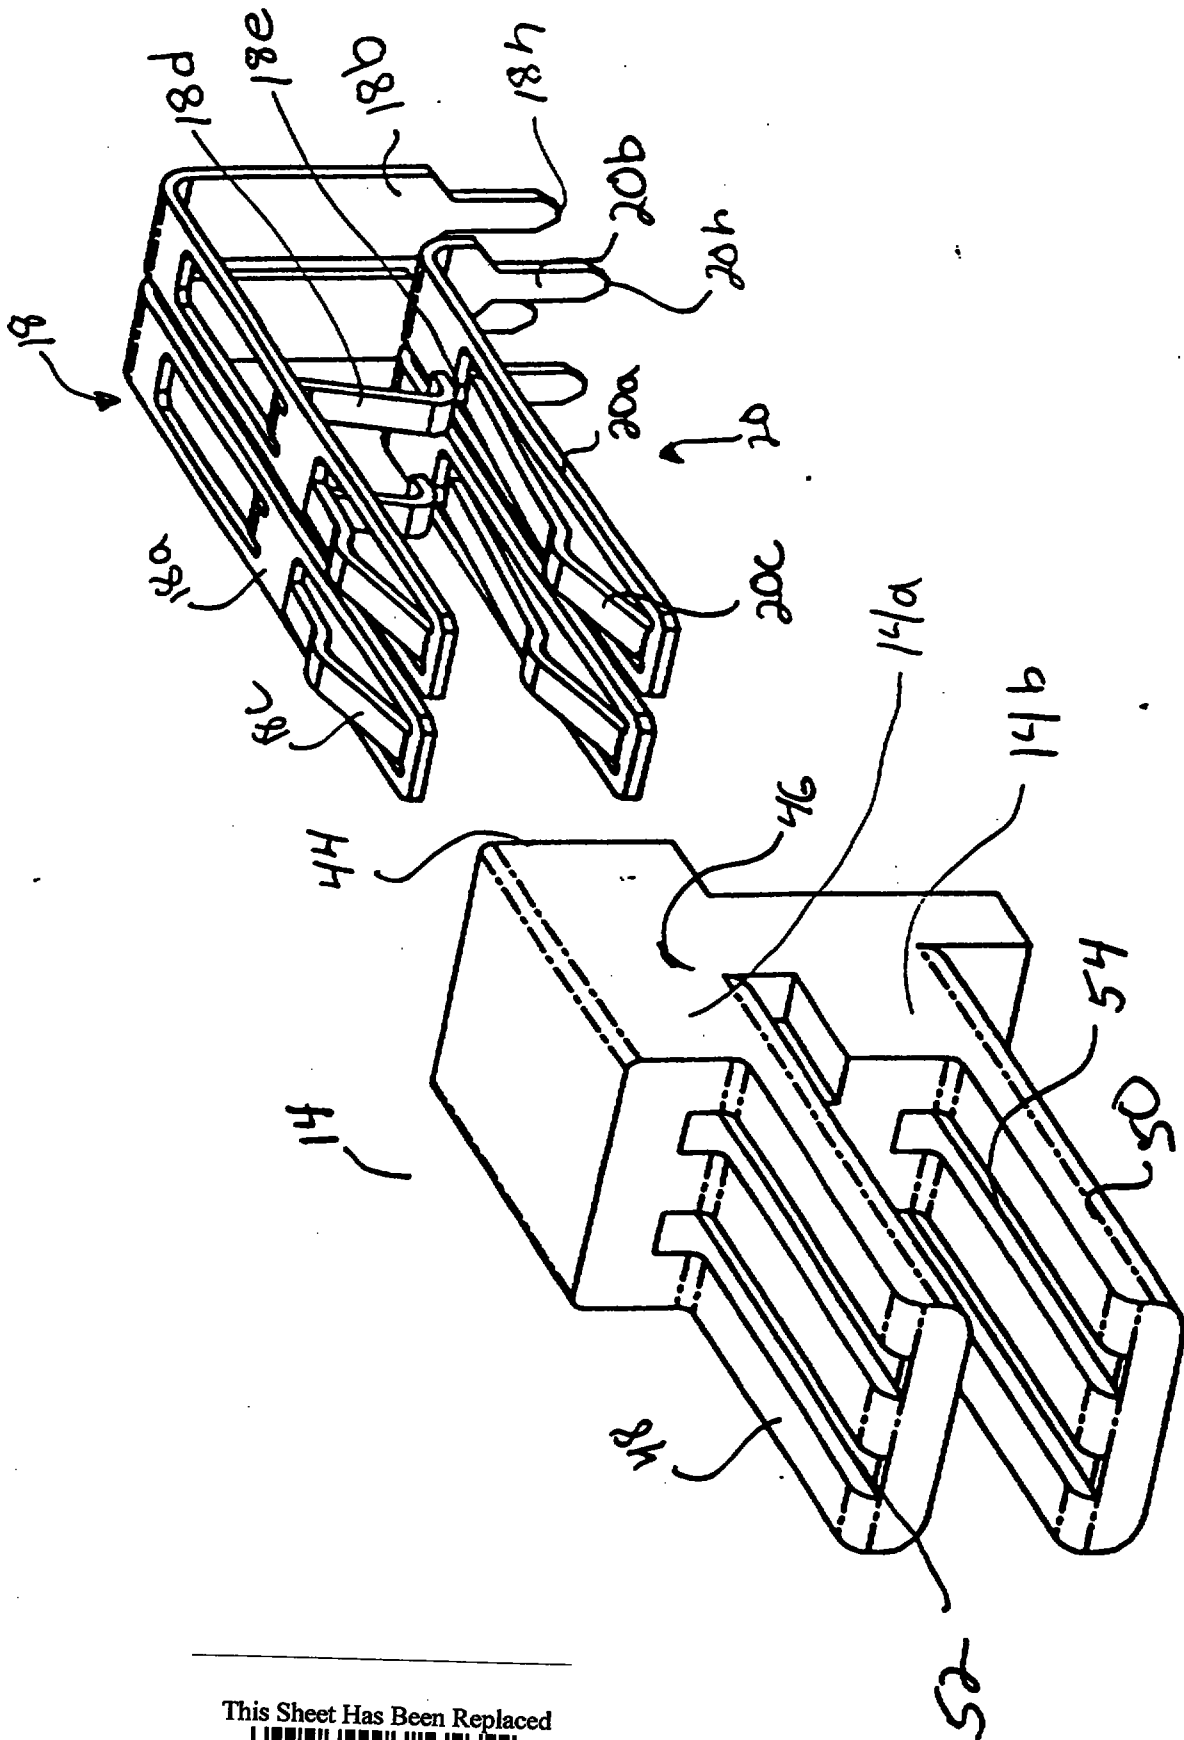


FIG 6

This Sheet Has Been Replaced




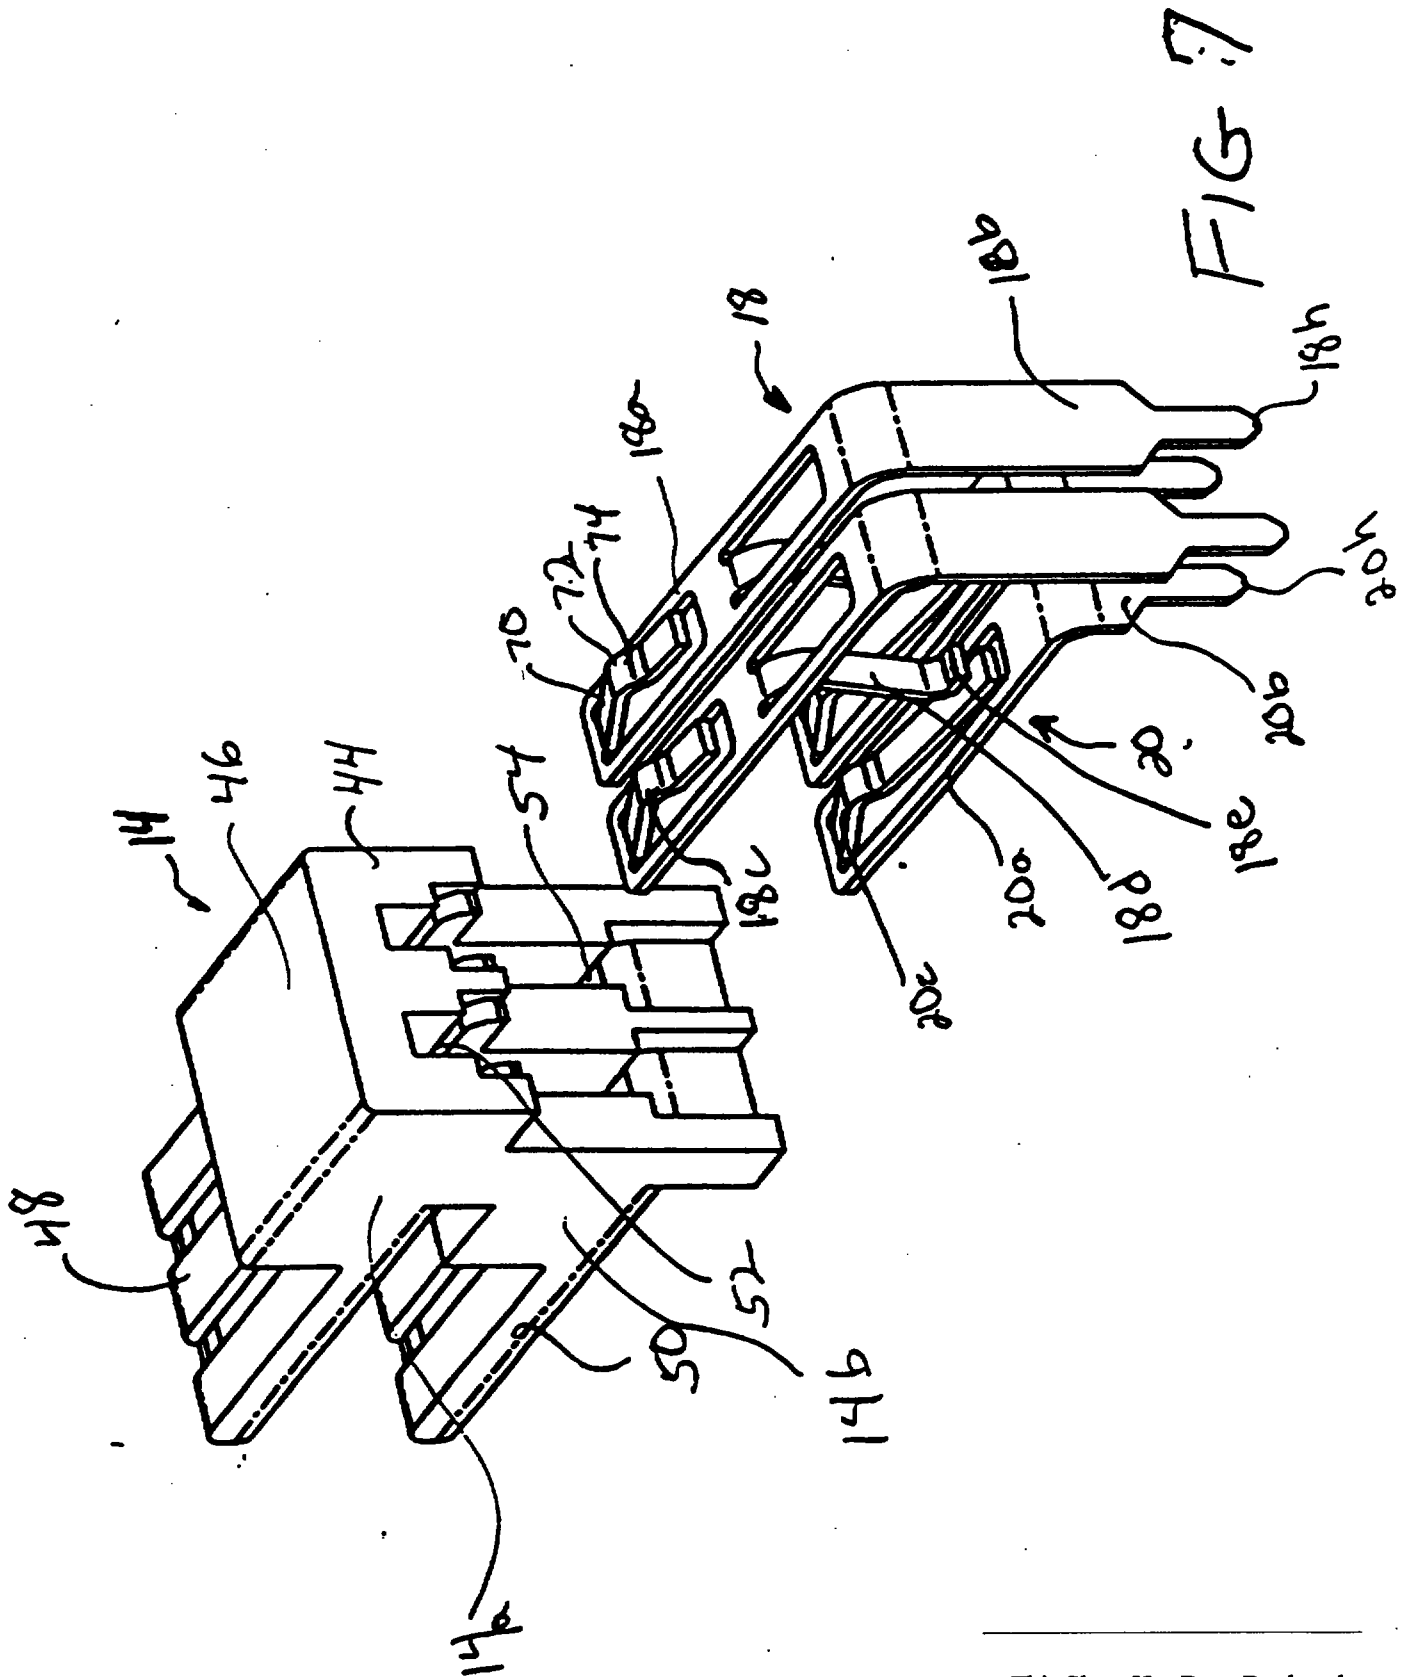

This Sheet Has Been Replaced



FIG 8

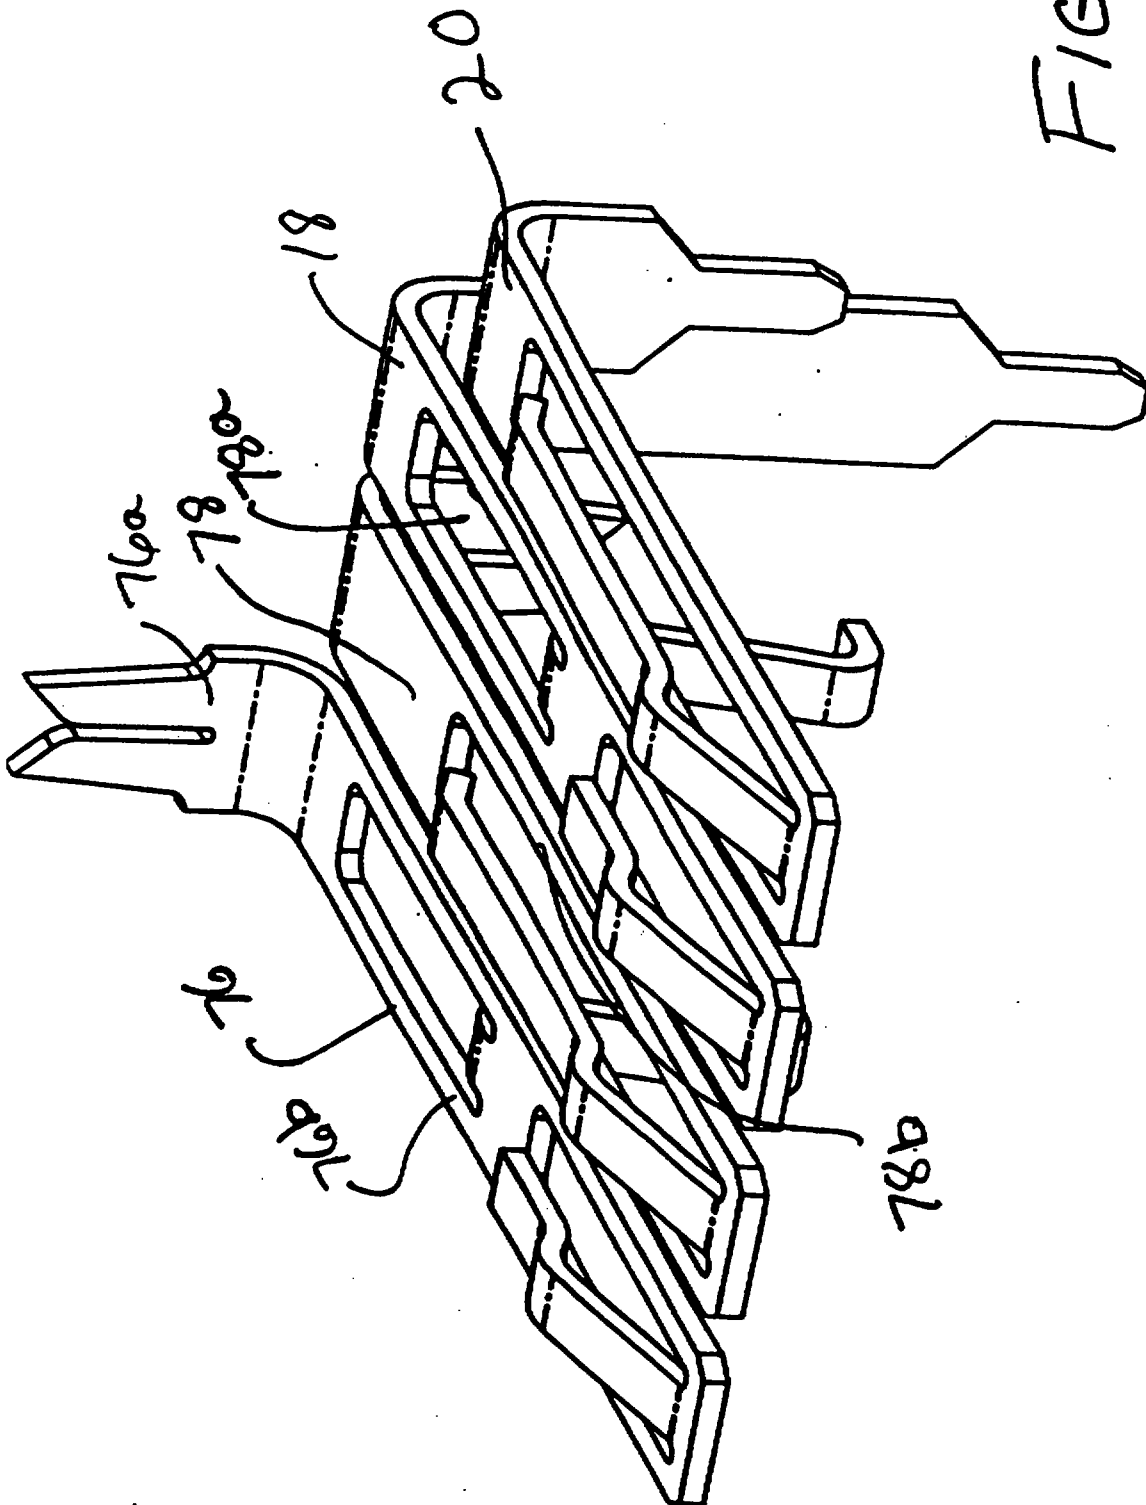

This Sheet Has Been Replaced




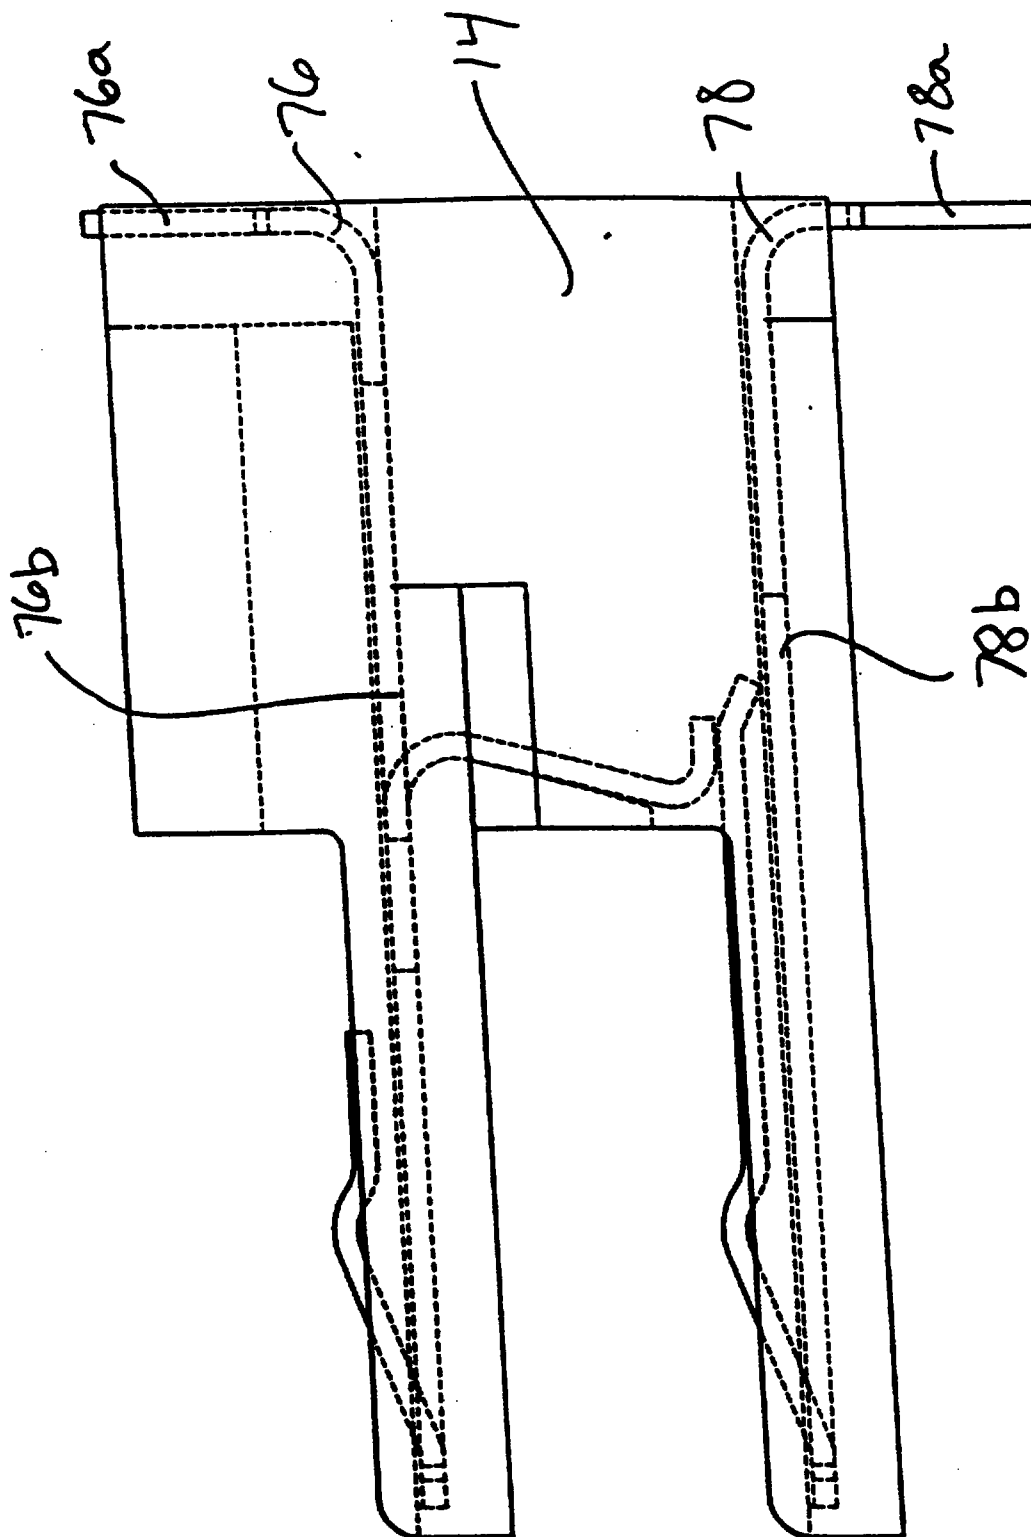


Fig 9


This Sheet Has Been Replaced




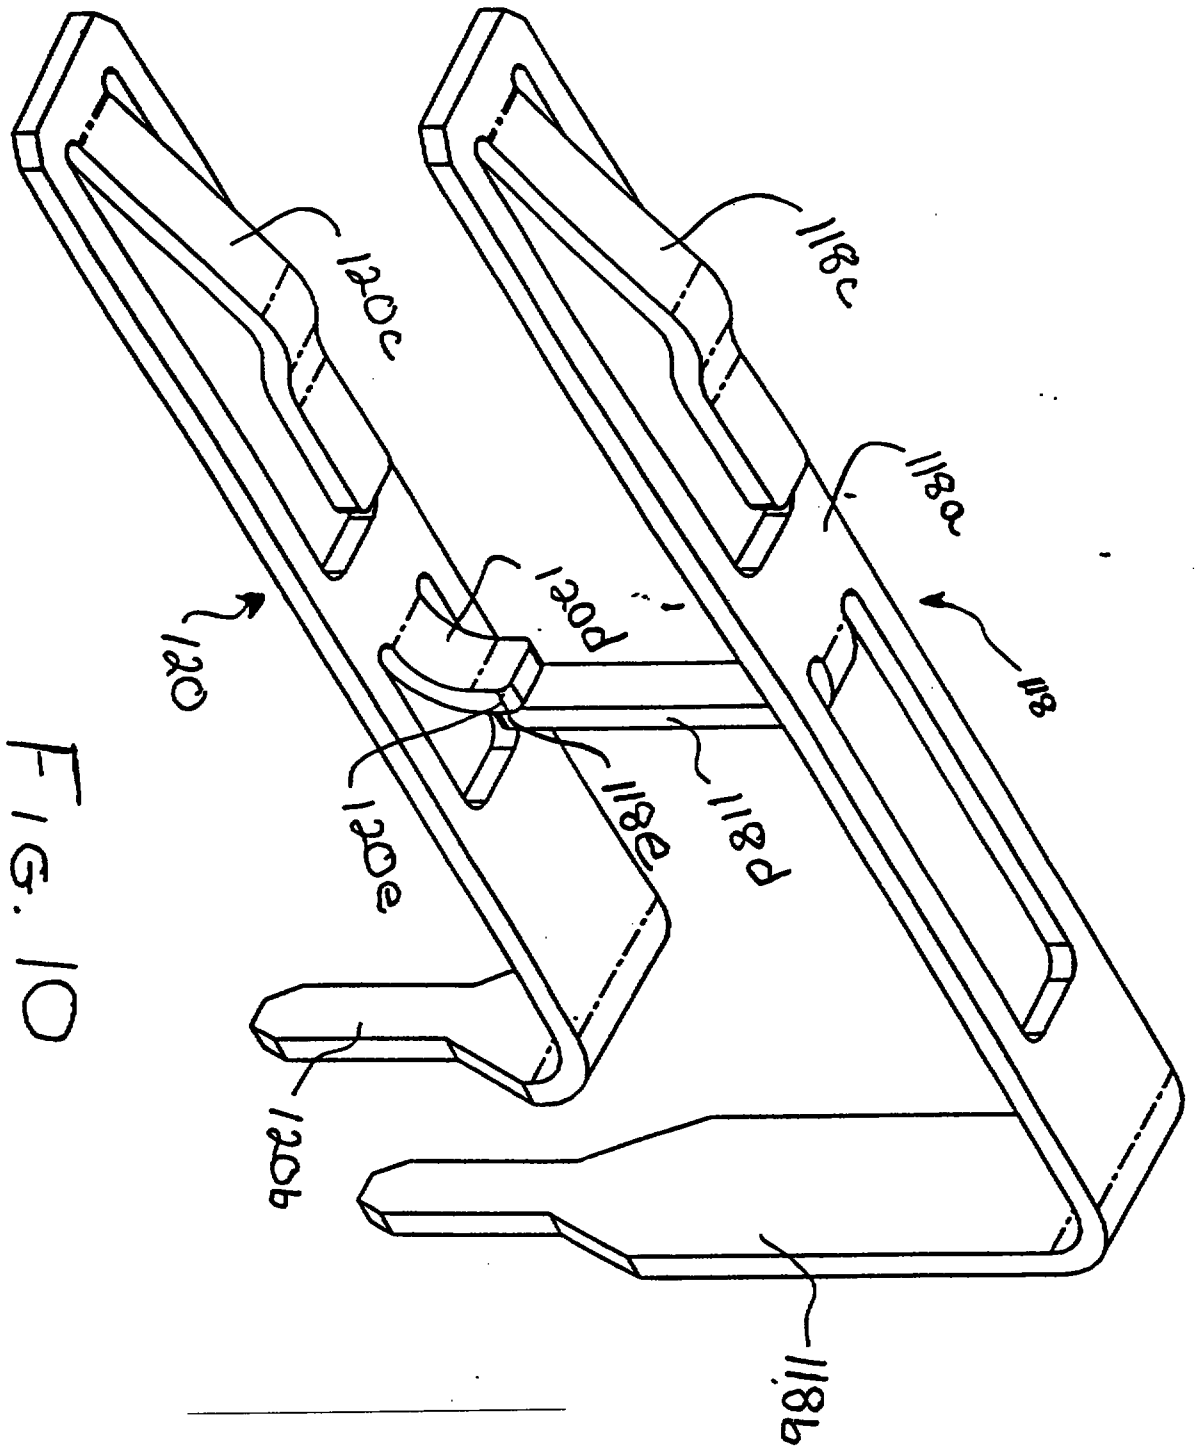

This Sheet Has Been Replaced





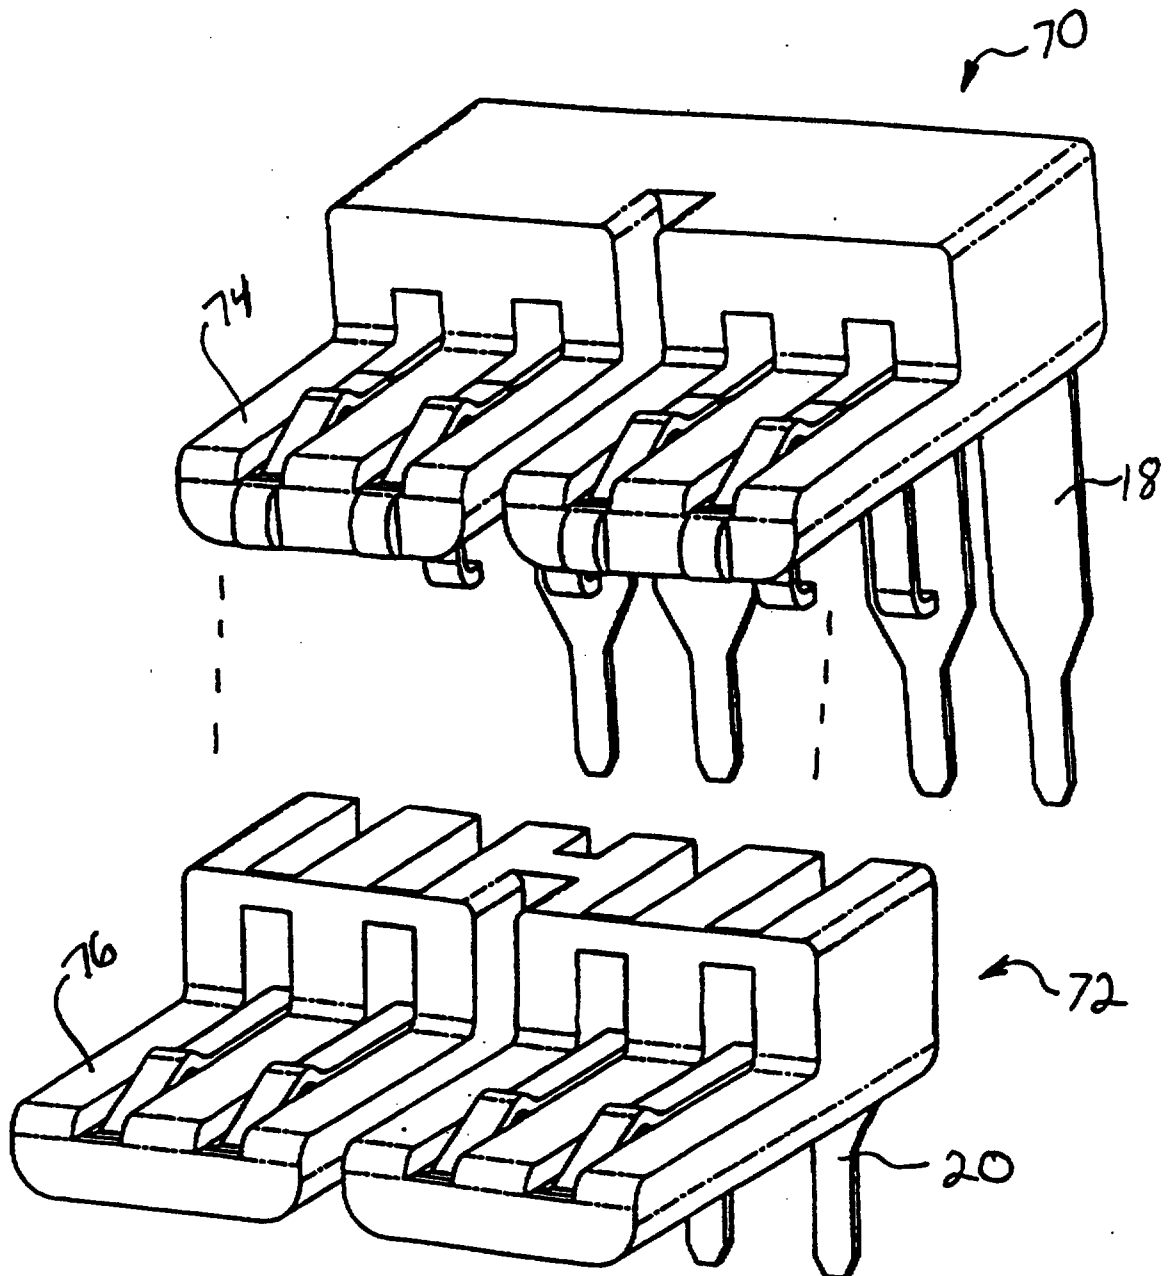

This Sheet Has Been Replaced



SHIELDED COMPACT DATA CONNECTOR

REPLACEMENT SHEETS SG

- ☒ Description : paged ... to paged ...
☒ Claim(s) : paged ... to paged ...
☒ Drawing(s) : paged ... to paged ...
☒ Abstract : paged ... to paged ...

DATE OF RECEIPT ... 3/11/97

Field of the Invention

The present invention relates generally to improvements in shielded electrical data connectors. More particularly, the present invention relates to a compact design for a shielded electrical data connector wherein electrical contacts of the connector are electrically shielded from other components of the connector.

Background of the Invention

Improvements in the electrical data transmission industry, especially in the computer field, have resulted in the ability to transmit data along transmission lines at increasingly higher data rates. Further, similar improvements have also seen the decrease in the size of the equipment used in the industry. In order to function effectively with such equipment, the interconnection technology, such as the electrical cables and electrical connectors which connect such equipment, has also undergone significant improvements. Electrical connectors are now smaller and capable of transmitting data at higher rates between such components.

The requirement to make the electrical connectors smaller necessitates putting the conductive contacts of such connectors in closer proximity. However, when transmitting data at higher data rates, this physical proximity also increases the cross-talk levels between such electrical contacts. Accordingly, the industry has seen the need for improved shielding within the electrical connectors so as to reduce cross-talk levels in the smaller connectors working at higher data rates. This is especially prevalent in connectors used in closed-loop data systems which provide for continuity of signal in a multi-component system when

This is the replacement sheet

Date:

03 JAN 1997

certain of the connectors are not interconnected. These closed-loop systems employ connectors containing devices which permit automatic shunting so that a closed-loop connection is maintained even when a connector is in a non-connected condition. Such shunting devices in these connectors render effective shielding even more difficult.

It is, therefore, desirable to provide an electrical connector which provides for shielding in a compact connector design and which reduces cross-talk between contacts of the connector when operating at higher data rates.

Summary of the Invention

It is an object of the present invention to provide an improved shielded electrical data connector.

It is a further object of the present invention to provide a data connector of compact size which is operable at higher data rates.

It is a still further object of the present invention to provide a data connector having improved shielding which reduces cross-talk between contacts of the connector.

It is an additional object to provide a shunted electrical contact which reduces cross-talk between adjacent contacts.

In the efficient attainment of these and other objects, the present invention provides an electrical connector including an electrically insulative contact support member and at least one pair of vertically aligned electrical contacts supported within the contact support member. The vertically aligned pair of contacts includes an upper contact having a depending deflectable shunt member. A lower contact of the pair includes a shunt member engagement element for engagement with a deflectable shunt member to electrically shunt the upper contact of the pair to the lower contact of the pair.

As more particularly described by way of the preferred embodiment herein, the connector may be a hermaphroditic

This is the replacement sheet

Date: 13 JAN 1997

connector including an insulative connector housing configured for mating engagement with a like housing. The housing has a front end, a contact support member and a rear end. A pair of vertically stacked electrical contacts includes an interconnection end adjacent the front end of the housing and a terminal end adjacent the rear end of the housing. The depending deflectable shunt member of the upper contact is deflectable away from the shunt member engagement element of the lower contact upon mating engagement of the connector housing with the like housing.

Brief Description of the Drawings

Figure 1 is a front perspective showing of the compact shielded data connector assembly of the present invention.

Figure 2 is a side-plan view of the connector assembly of Figure 1.

Figure 3 shows, in exploded perspective view, components of the connector assembly of Figures 1 and 2.

Figure 4 shows an electrical connector of Figure 1 interconnected with a like connector in hermaphroditic fashion.

Figure 5 is a rear-perspective view of the outer housing of the connector assembly of Figure 1.

Figures 6 and 7 are, respectively, exploded front and rear perspective views of the insulative support member and electrical contacts of the connector assembly of Figure 1.

Figure 8 is a perspective showing of alternative constructions of the electrical contacts of the connector assembly of Figure 1.

Figure 9 is a side-plan view of the alternative contacts of Figure 8 supported within the terminal support member.

Figure 10 is a perspective showing of an additional electrical contact design useful in the connector of the present invention.

Figure 11 is a side-plan view of the contacts of Figure 10 supported within an insulative housing.

This is the replacement sheet

Date: 13 JAN 1997

Figure 12 shows in exploded perspective view the contacts of Figure 6 supported in a vertically stacked pair of insulative support members.

Detailed Description of the Preferred Embodiments

Referring to Figures 1 - 3, a shielded compact electrical data connector assembly 10 of the present invention is shown. Data connector assembly 10 is of the type used to transmit data signals between components of a closed-loop data system. Connector assembly 10 may function in hermaphroditic fashion, that is, it is interconnectable to a similarly formed electrical connector assembly, or it may function in a panel mount environment where plural such connector assemblies are supported on a wiring panel for connection with similarly formed electrical connectors.

The connector assembly 10 of the present invention may be of the type shown and described in our application EP-A-0610087 entitled VERTICALLY ALIGNED ELECTRICAL CONNECTOR COMPONENTS; which is incorporated by reference herein for all purposes.

Connector assembly 10 comprises an electrically conductive outer housing 12, a pair of side by side electrically insulative support members 14 and 16, upper and lower electrical contacts 18 and 20, respectively, an insulative rear-contact support 22 and a rear-conductive shield 24.

Conductive outer housing 12 and conductive rear shield 24 are formed in the preferred embodiment of die-cast metal. However, other conductive elements such as conductive plastic or metalized plastic may be employed. Support members 14 and 16, as well as contact support 22, are formed of a suitably electrically insulative plastic. Electrical contacts 18 and 20 are formed of a suitably conductive metallic material such as beryllium copper.

This is the replacement sheet

Date: 13 JAN 1997

Referring additionally to Figure 5, outer conductive housing 12 is shown in further detail. Outer housing 12 is generally an elongate rectangular member having a front interconnection end 26 and a rear contact accommodating end 28. Outer housing 12 is divided into four discrete compartments 30 arranged in side by side and upper and lower quadrants. Outer housing 12 includes a pair of opposed spaced-apart vertical side walls 32 and a central vertical dividing wall 34. A horizontal upper wall 38 extends across the upper extents of side walls 32 and dividing wall 34.

Outer housing 12 further includes intermediate horizontal bridge portions 40 extending between side walls 32 and dividing wall 34, as well as lower horizontal bridge portions 42, which also extend between side walls 32 and dividing wall 34. The construction of outer housing 12 provides for the complete perimetrical bounding of compartments 30. It is contemplated that in the preferred embodiment, the outer housing 12 will be integrally formed. However, individual components may be used to make up outer housing 12.

Referring now to Figures 6 and 7, terminal support members 14 and 16, as well as upper and lower contacts 18 and 20, are shown in more detail. Support members 14 and 16 are preferably of identical construction. For clarity of explanation, Figures 6 and 7 show only support member 14. Support member 14 is generally an elongate molded plastic member having a rear contact accommodating end 44, a central main body portion 46 and upper and lower support platforms 48 and 50 extending oppositely from rear contact accommodating end 44. Support member 14 includes a pair of side by side upper channels 52 extending from rear contact accommodating end 44 through central main body portion 46 and along upper support platform 48. Similarly, side by side lower channels 54 extend from the rear contact accommodating end 44 through central main body portion 46 and along lower support platform 50. Each support member 14 is divided into individual upper and lower stacked support

This is the replacement sheet

Date: 13 JAN 1997

elements 14a and 14b which include upper and lower support platforms 48 and 50, respectively. While support member 14 is shown to be integral, it is contemplated that the support member may comprise separate upper and lower support elements.

Support members 14 and 16 are shown to be side by side, each having upper and lower support platforms 48 and 50. However, other constructions of the terminal support members are contemplated. Referring to Figure 12, the terminal support members may be formed to be vertically stacked upper and lower support members 70 and 72. Each of the support members 70 and 72 is formed of insulative plastic and respectively support contacts 18 and 20. Upper support member 70 includes a terminal support platform 74 while lower support member 72 includes a terminal support platform 76. Terminal support members 70 and 72 are configured to be received within conductive outer housing 12 (Fig. 5) which shields the individual contacts 18 and 20 supported therein as will be described in further detail hereinbelow.

Referring again to Figures 6 and 7, also shown are upper and lower electrical contacts 18 and 20 which are typically stamped and formed members. Lower contacts 20 include a generally elongate base portion 20a, a pin-type solder tail 20b and a reversely directed cantilevered spring portion 20c which extends back over base portion 20a. Solder tail 20b is of conventional construction and may be inserted into a through hole of a printed circuit board (not shown) and soldered thereto establishing electrical connection therebetween. In the present illustrative embodiment, solder tail 20b is shown extending downwardly at a right angle from base portion 20a, however, straight-solder tails may also be employed.

Cantilevered spring portion 20c is constructed so as to be deflectable for movement toward and away from base portion 20a upon interconnection of a further connection device. Cantilevered spring portion 20c has an extended beam length which extends toward solder tail 20b.

This is the replacement sheet

Date: 13 JAN 1997

Upper contacts 18 are of construction similar to that of contacts 20. Contacts 18 include an elongate base portion 18a, a solder tail 18b and a reversely directed cantilevered spring portion 18c of length shorter than cantilevered spring portion 20c of contact 20. As contacts 18 and 20 are arranged in upper and lower fashion, solder tail 18b of contacts 18 are longer than the solder tails 20b of contacts 20 so that the distal extents 18h and 20h of the solder tails extend approximately the same distance, facilitating connection of the solder tails to a printed circuit board.

As shown in Figures 6 and 7, upper contacts 18 include a depending shunt member 18d which is struck from a central extent of planar base portion 18a. The distal extent 18e of shunt member 18d is engagable with the extended beam of cantilevered spring portion 20c of contacts 20 to provide for shunted engagement as between contacts 18 and 20. The description of the shunting between contacts 18 and 20 is described in further detail in the above-identified incorporated reference. Shunt member 18d of contact 18 extends downwardly from base portion 18a at an angle just less than 90°. Also, the distal extent 18e has a reversely curved portion. Upon shunting engagement of shunt member 18d with cantilevered spring portion 20c, a wiping engagement is achieved.

As shown in further detail in Figure 2, contacts 18 and 20 are supported within support member 14. Base portions 18a and 20a are supported respectively on platforms 48 and 50 through upper and lower channels 52 and 54. Solder tails 18b and 20b extend along rear contact accommodating end 44 of support member 14.

Support members 14 and 16 supporting upper and lower contacts 18 and 20 are inserted into outer housing 12 in side by side fashion. Each upper and lower support platform 48 and 50 of support members 14 and 16 are individually accommodated in one of the bounded compartments 30 of outer housing 12 (Fig. 5). Upper wall 38, side walls 32 and lower

This is the replacement sheet

Date: 13 JAN 1997

bridge portions 42 serve to shield collectively the contact 18 and 20. Dividing wall 34 serves to shield each of the side by side pairs of contacts 18 and 20. Intermediate bridge portions 40 serve to shield the upper contacts 18 from the lower contacts 20. Thus, each pair of contacts supported by each of the platforms, will be electrically shielded from the contact pairs of the other platforms by its residence in an individual bounded compartment 30. Further, intermediate bridge portion 40 includes spaced recesses 40a separated by a central protrusion 40b. Shunt member 18d of each contact 18 extends through recess 40a. The central protrusion 40b provides shielding as between adjacent shunt member 18d.

Referring again to Figures 2 and 3, the shielding of contacts 18 and 20 is continued at the contact accommodating end 28 of housing 12 by rear shield 24. Shield 24, formed of conductive metal, includes a short forward wall 56 and a taller rear wall 58 separated by a centrally located transverse web 60. Shield 24 provides conductive shielding as between solder tails 18b of upper contacts 18 and solder tails 20b of lower contacts 20. This is achieved by positioning solder tail 20b on one side of forward wall 56 while solder tails 18b are positioned on the other side of forward wall 56. Solder tails 18b reside between walls 56 and 58.

In order to support solder tails 18b of contacts 18, connector assembly 10 includes insulative contact support 22. Contact support 22 is a plastic member having a front wall 62, a taller rear wall 64 and individual chambers 66, which individually accommodate solder tails 18b of contacts 18. Contact support 22 includes a recess 68 extending from a lower edge thereof which accommodates web 60 of shield 24 when contact support 22 is inserted within shield 24.

In operation, once the support members 14 and 16 supporting contacts 18 and 20 are inserted into outer housing 12, shield 24, having contact support 22 inserted therein, may be inserted over the solder tails 18b of

This is the replacement sheet

Date: 13 JAN 1997

contacts 18 to reside adjacent contact accommodating end 28 of outer housing 12.

Referring to Figure 4, connector assembly 10 is shown interconnected to an identical connector 10' in hermaphroditic fashion. This is accomplished by rotating connector assembly 10' 180° and interconnecting the two parts so that upper contacts 18 of connector assembly 10 engage lower contacts 20' of connector assembly 10', while lower contacts 20 of connector assembly 10 engage upper contacts 18' of connector assembly 10'. It is noted that as the lower contacts of one connector engage the upper contacts of the other connector when connected in hermaphroditic fashion, the electrical path between each pair of the mated contacts will be the same for all contact pairs. Thus the electrical path length between the tip 18h' of solder tail 18b' and the tip 20h of solder tail 20b, which is connected thereto, is the same as the path length between the tip 18h of solder tail 18b and the tip 20h' of solder tail 20b' of another connected pair of contacts. By creating identical electrical path lengths, impedance mismatch is reduced as between mated pairs of contacts.

Referring to Figures 4 and 7, another feature of the present invention may be described. Cantilevered spring portions 18c and 20c of upper and lower contacts 18 and 20 further provide a first upwardly inclined contact surface 70 extending from the front end of the contacts to a centrally located apex 72. The contact further includes a depending rearwardly facing engagement surface 74 extending from apex 72 down to the distal end of the contacts. As hermaphroditic connection is made as shown in Figure 4, the first contact surfaces of the mating contacts will ride against each other until the apices of the respective contacts bypass one another. The inherent spring bias of cantilevered spring portion 18c and 20c permit such engagement. Once the apices are bypassed, the depending engagement surfaces 74 will engage in locking fashion. Thus the mechanical engagement of the mated contacts of the

This is the replacement sheet

Date: 13 JAN 1997

hermaphroditic connectors will serve, to some degree, to lock the contacts together thereby locking the respective connectors together. This locking feature also assures proper connection of connector assembly 10 to connector assembly 10'.

Further embodiments of the present invention may be shown in Figures 8 and 9. Contacts of the present invention include solder type tails 18b and 20b such as shown in contacts 18 and 20 for attachment to through holes of a printed circuit board. However, the present invention also contemplates employing other contact types 76 and 78, which include IDC portions 76a and 78a for making insulation displacing connection to electrical conductors (not shown) in a manner described in the above-incorporated patent application. IDC portions 76a and 78a may extend at oppositely directed 90° angles from the central base portions 76b and 78b of contacts 76 and 78. Figure 9 shows such insulation displacement contacts 76 and 78 supported in a support member 14.

Additionally, since support members 14 and 16 may be inserted into outer housing 12 in a modular fashion, connector assembly 10 of the present invention may accommodate different transmission styles within the same connector assembly. While the present embodiment shows transmission terminal devices of the electrical signal type, other terminals, such as fiber optic terminations and power contacts, may be inserted into connector assembly 10. It is further contemplated that the transmission terminal device may be the stamped end of a co-axial cable where the center conductor serves as an electrical contact. Support members 14 and 16 can be adapted to accommodate such co-axial cable. Thus, connector assembly 10 may house mixed transmission components.

Referring now to Figure 10, alternative construction of the contacts 18 and 20 (Fig. 8) are shown. For simplification of description, similar reference numerals will be used to note similar components.

This is the replacement sheet

Date: 13 JAN 1997

Contacts 118 and 120 are typically stamped and formed of conductive metal. Lower contact 120 includes a generally elongate base portion 120a, a pin-type solder tail 120b and a reversely directed cantilevered spring portion 120c, which extends back towards base portion 120a. Tail 120b and reversely bent cantilevered spring portion 120c function in a manner similar to that described above with respect to contact 20. Cantilevered spring portion 120c has a shorter extent than cantilevered spring portion 20c of contact 20. Upper contact 118 includes an elongate base 118a, a solder tail 118b and a reversely directed cantilevered spring portion 118c.

In order to achieve shunted electrical connection between upper contact 118 and lower contact 120, upper contact 118 includes a depending shunt member 118d, which is struck from a central extent of planar base portion 118a. In the present illustrative embodiment, shunt member 118d is formed to be a deflectable cantilevered beam which deflects from the position shown in Figure 10 to a position upwardly toward base portion 118a. As will be described in further detail hereinbelow, shunt member 118d is deflectable upon hermaphroditic mating connection of the connectors housing contacts 118.

In order to facilitate the establishment of shunted electrical engagement between contact 118 and contact 120, contact 120 includes an upwardly extending protrusion 120d, forming an engagement surface for shunt member 118d. Protrusion 120d is struck from a central extent of planar base portion 120a. Protrusion 120d has a distal extent 120e, which is engagable with a distal extent 118e of shunt member 118d. This engagement establishes electrical connection between contact 118 and contact 120. Shunt member 118d is deflectably movable away from protrusion 120d to break the connection between contacts 118 and 120.

Referring now to Figure 11, a connector assembly 110 is shown interconnected to an identical connector assembly 110'. The rendering in Figure 11 is substantially similar

to that of Figure 4. However, connector assemblies 110 and 110' include the contacts 118 and 120 shown in Figure 10. As connector assemblies 110 and 110' are identical hermaphroditic connectors, connection may be accomplished by rotating connector assembly 110' 180° and interconnecting the two components so that the upper contacts 118 of connector assembly 110 engage lower contacts 120' of connector assembly 110', while lower contacts 120 of connector assembly 110 engage upper contacts 118' of connector assembly 110'. The connection is achieved in a manner shown and described above with respect to Figure 4.

The insulative housing 114 supporting contacts 118 and 120 includes upper and lower platforms 148 and 150 respectively. A forward end of upper platform 148 includes a shunt member deflection portion 125. Shunt member deflection portion 125 extends beyond the forward end of upper platform 148 so as to engage shunt member 118d' of corresponding connector 110'.

As shown in Figure 11 upon interengagement of connector assembly 110 with connector assembly 110', shunt member deflection portion 125 contacts and engages shunt member 118d' of contact 118' deflecting it back away from protrusion 120d' to break the shunted electrical engagement between the components. Similarly, upon interconnection, shunt member deflection portion 125' of connector assembly 110' engages shunt member 118d, breaking its shunted connection with protrusion 120d. Thus upon electrical interengagement of connector assembly 110 with connector assembly 110', shunted engagement of contacts 118 and 120 and 118' and 120' is broken, and upon disconnection of connector assembly 110 to connector assembly 110', the shunted engagement of those contacts is reestablished.

It has been found that the arrangement shown in Figures 10 and 11 provides superior results, especially with respect to the adverse effects of cross-talk as between the upper and lower contacts of each connector assembly.

This is the replacement sheet

Date: 13 JAN 1997

Various changes to the foregoing described and shown structures would now be evident to those skilled in the art. Accordingly, the particularly disclosed scope of the invention is set forth in the following claims.

This is the replacement sheet

Date: 13 JAN 1997

CLAIMS

1. An electrical connector comprising:
an electrically insulative contact support member; and
at least one pair of vertically aligned electrical contacts supported within the contact support member; said vertically aligned pair of contacts including an upper contact having a depending deflectable shunt member, and a lower contact having a shunt member engagement element for engagement with said deflectable shunt member to electrically shunt said upper contact to said lower contact.
2. An electrical connector of claim 1 wherein said shunt member engagement element includes an upwardly extending protrusion.
3. An electrical connector of claim 1 or claim 2 wherein each said contact includes an interconnection end for electrical engagement with a contact of a mating connector and a terminal end opposite said interconnection end.
4. An electrical connector of claim 3 wherein said depending deflectable shunt member of said upper contact is positioned between said interconnection end and terminal end thereof and wherein said upwardly extending protrusion of said lower contact is positioned between said interconnection end and said terminal end thereof.
5. A hermaphroditic electrical connector comprising:
an insulative connector housing configured for mating engagement with a like housing, said housing having a front end, a support member for supporting electrical contacts, and a rear end; and
a pair of vertically aligned electrical contacts supported by said housing support member, an upper contact of said pair having a depending deflectable shunt member and a lower contact of said pair having a shunt member



This is the replacement sheet

Date: 13 JAN 1997

engagement element engagable with said depending deflectable shunt member for electrically shunting said upper contact to said lower contact,

said depending deflectable shunt member of said upper contact being deflectable away from said shunt member engagement element of said lower contact upon mating engagement of said connector housing with said like housing.

6. A hermaphroditic electrical connector of claim 5 wherein said contacts have an interconnection end adjacent said front end of said housing and a terminal end adjacent said rear end of said housing.

7. A hermaphroditic electrical connector of claim 6 wherein said depending deflectable shunt member of said upper contact is positioned between said interconnection end and said terminal end thereof.

8. A hermaphroditic electrical connector of claim 7 wherein said front end of said housing includes a shunt member deflection portion and wherein upon said mating engagement of said housing with said like housing said shunt member deflection portion of said like housing deflects said shunt member away from said shunt member engagement member of said lower contact.



This is the replacement sheet

13 JAN 1997

Date:


ABSTRACT
SHIELDED COMPACT DATA CONNECTOR

An electrical connector (10) provides for selective shunting as between contacts of the connector. The connector includes a pair of vertically aligned electrical contacts (18, 20) supported within an electrically insulative housing (14). The housing (14) is configured for mating engagement with a like housing for hermaphroditic interconnection. The upper contact of the pair includes a depending deflectable shunt member (18d) and the lower contact of the pair includes a shunt member engagement element for electrically shunting the pair of contacts. The shunt member is deflectable away from the shunt member engagement element upon the mating engagement of the housing with the like housing.

FIGURE 6.


This is the replacement sheet

Date: 13 JAN 1997

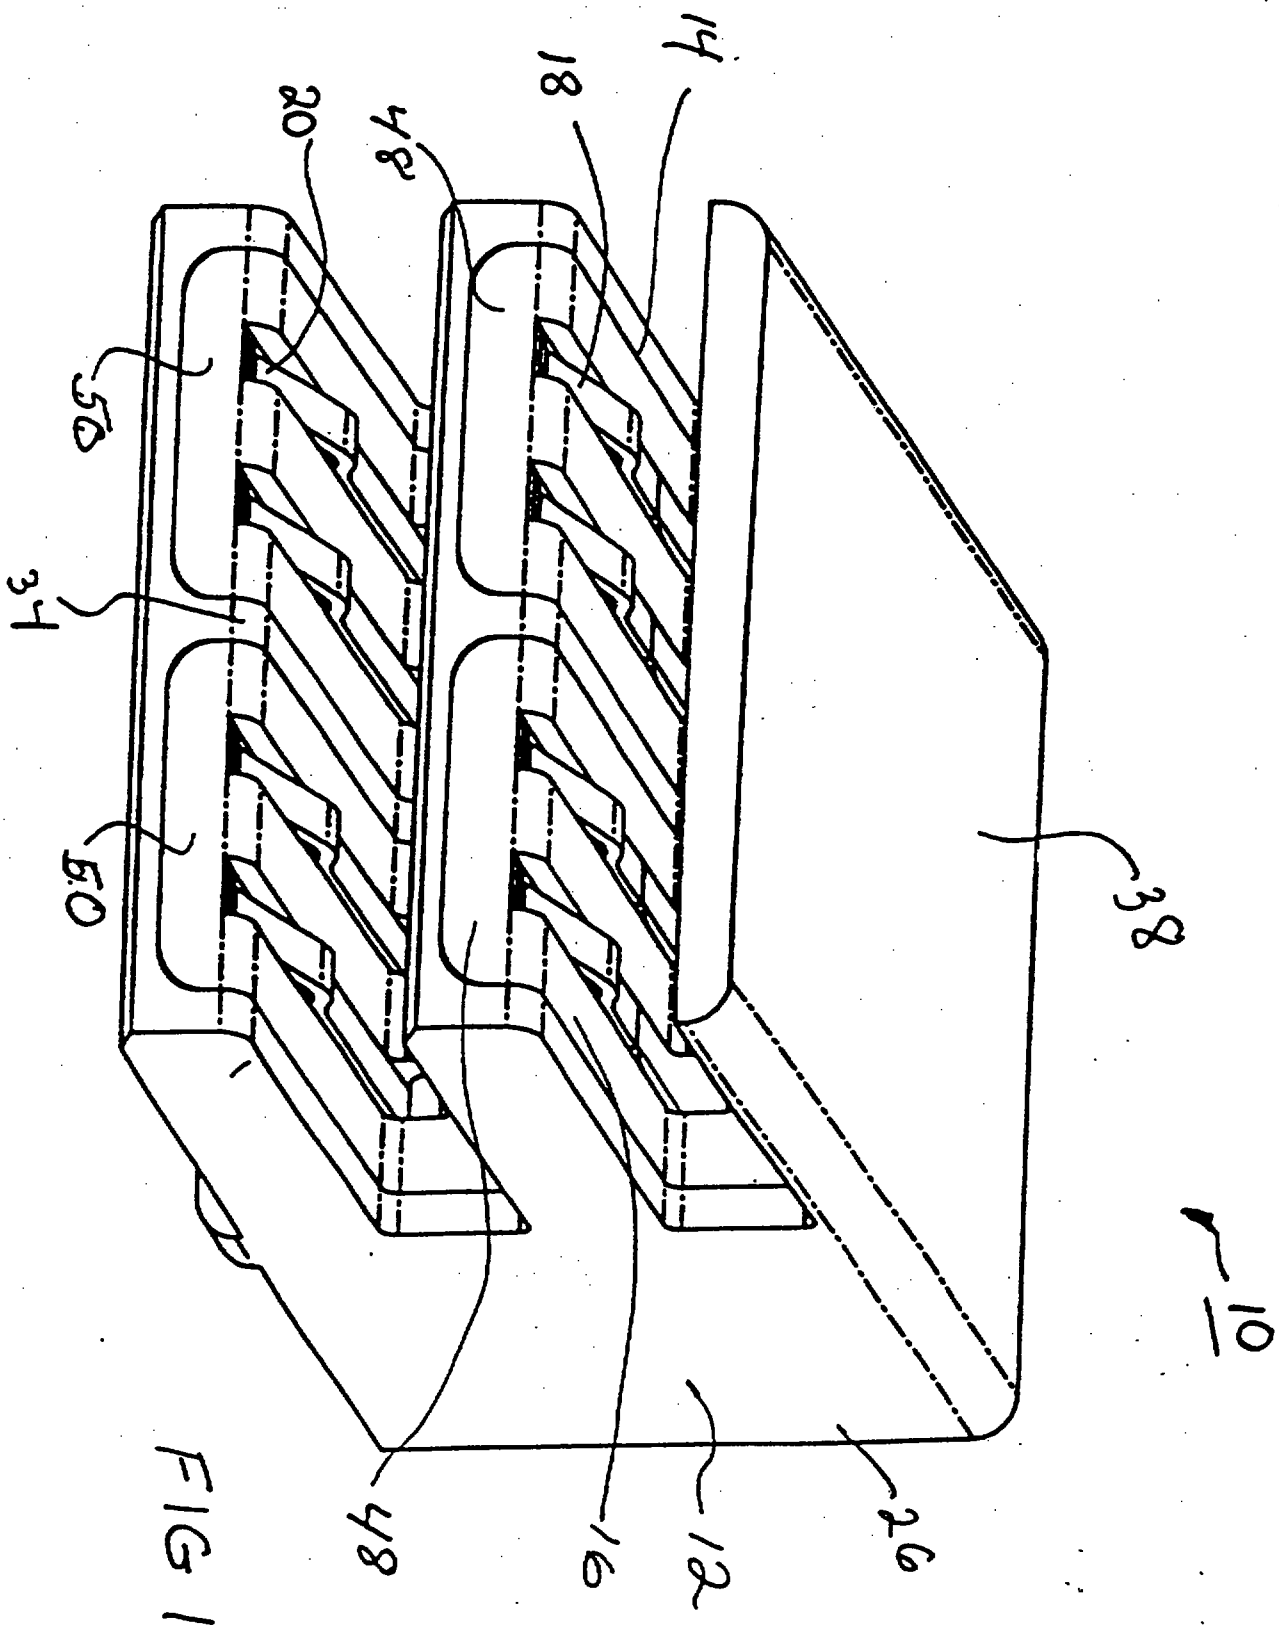

This is the replacement sheet

Date: 13 JAN 1997
1-802802

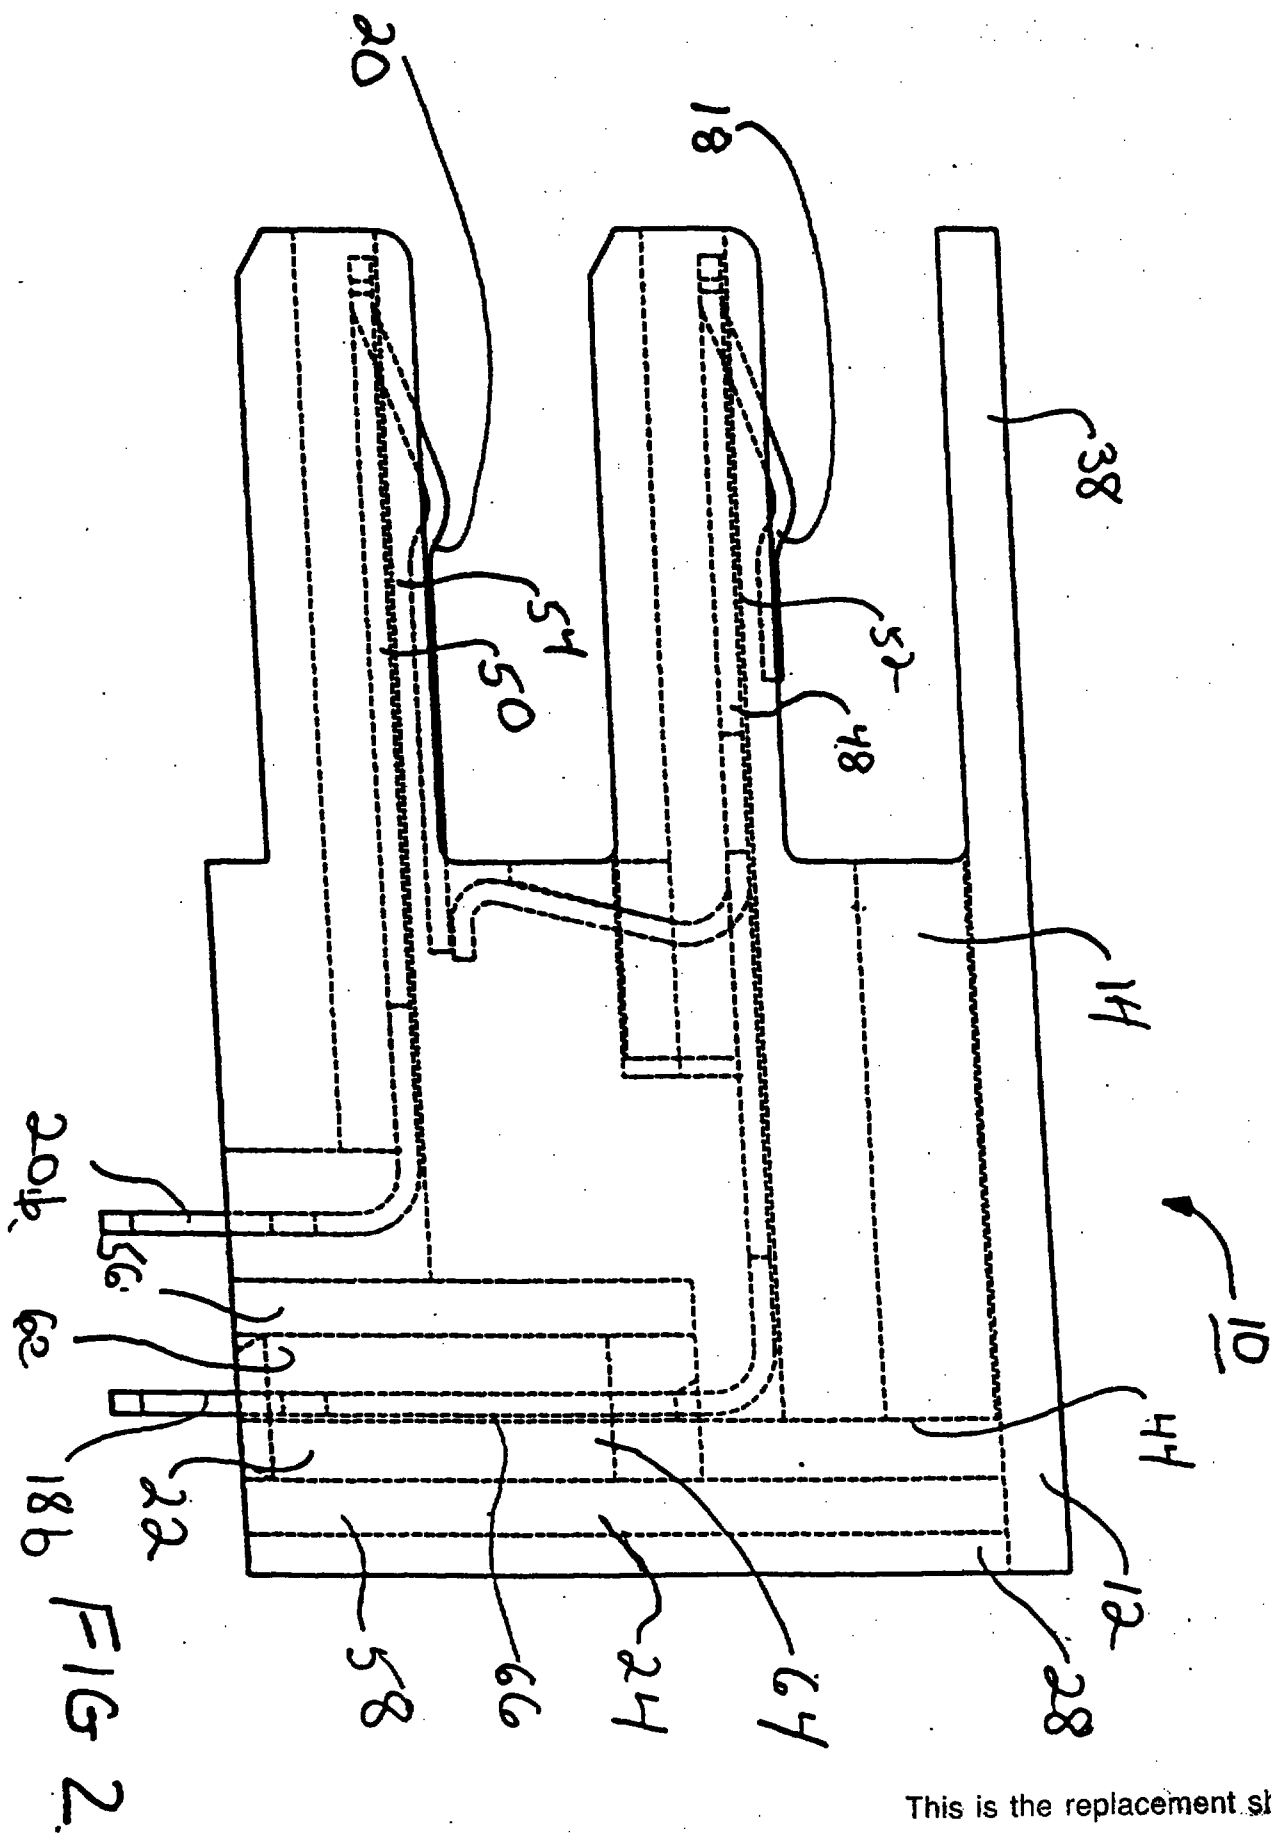

This is the replacement sheet

Date: 13 JAN 1997


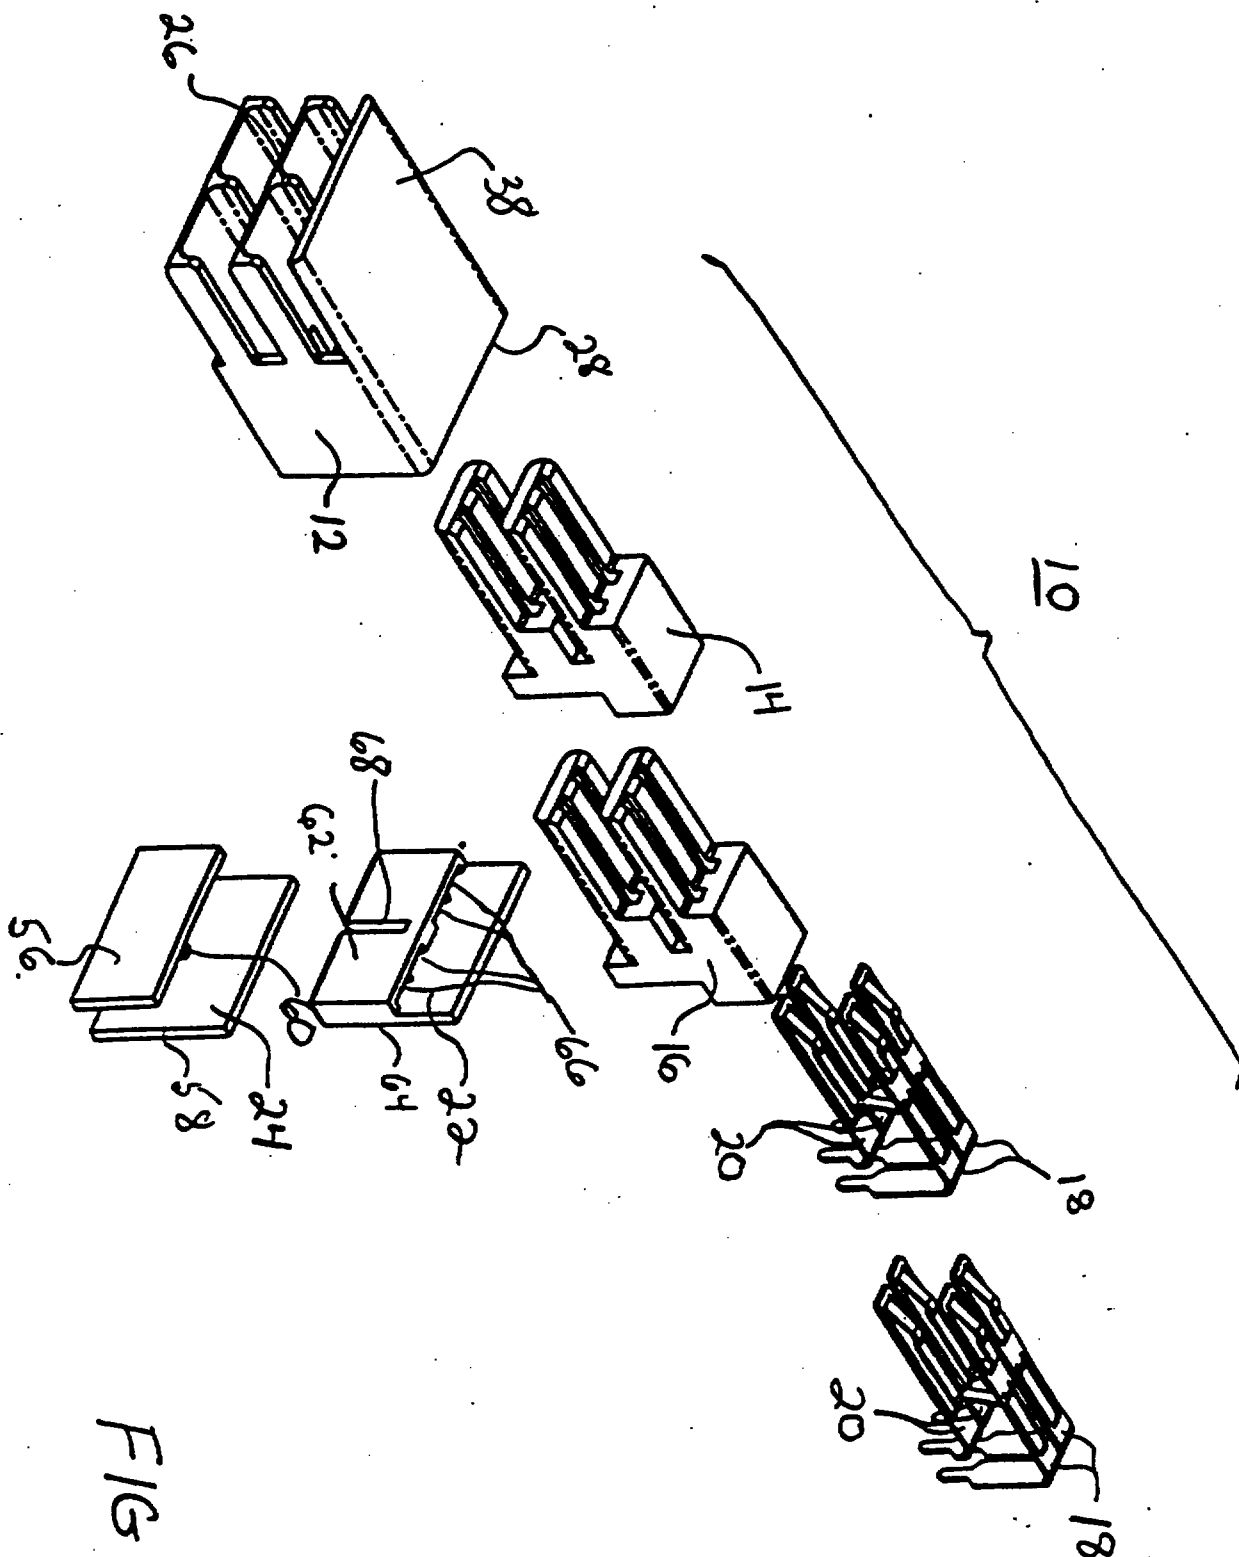


FIG 3


This is the replacement sheet

Date: 13 JAN 1997

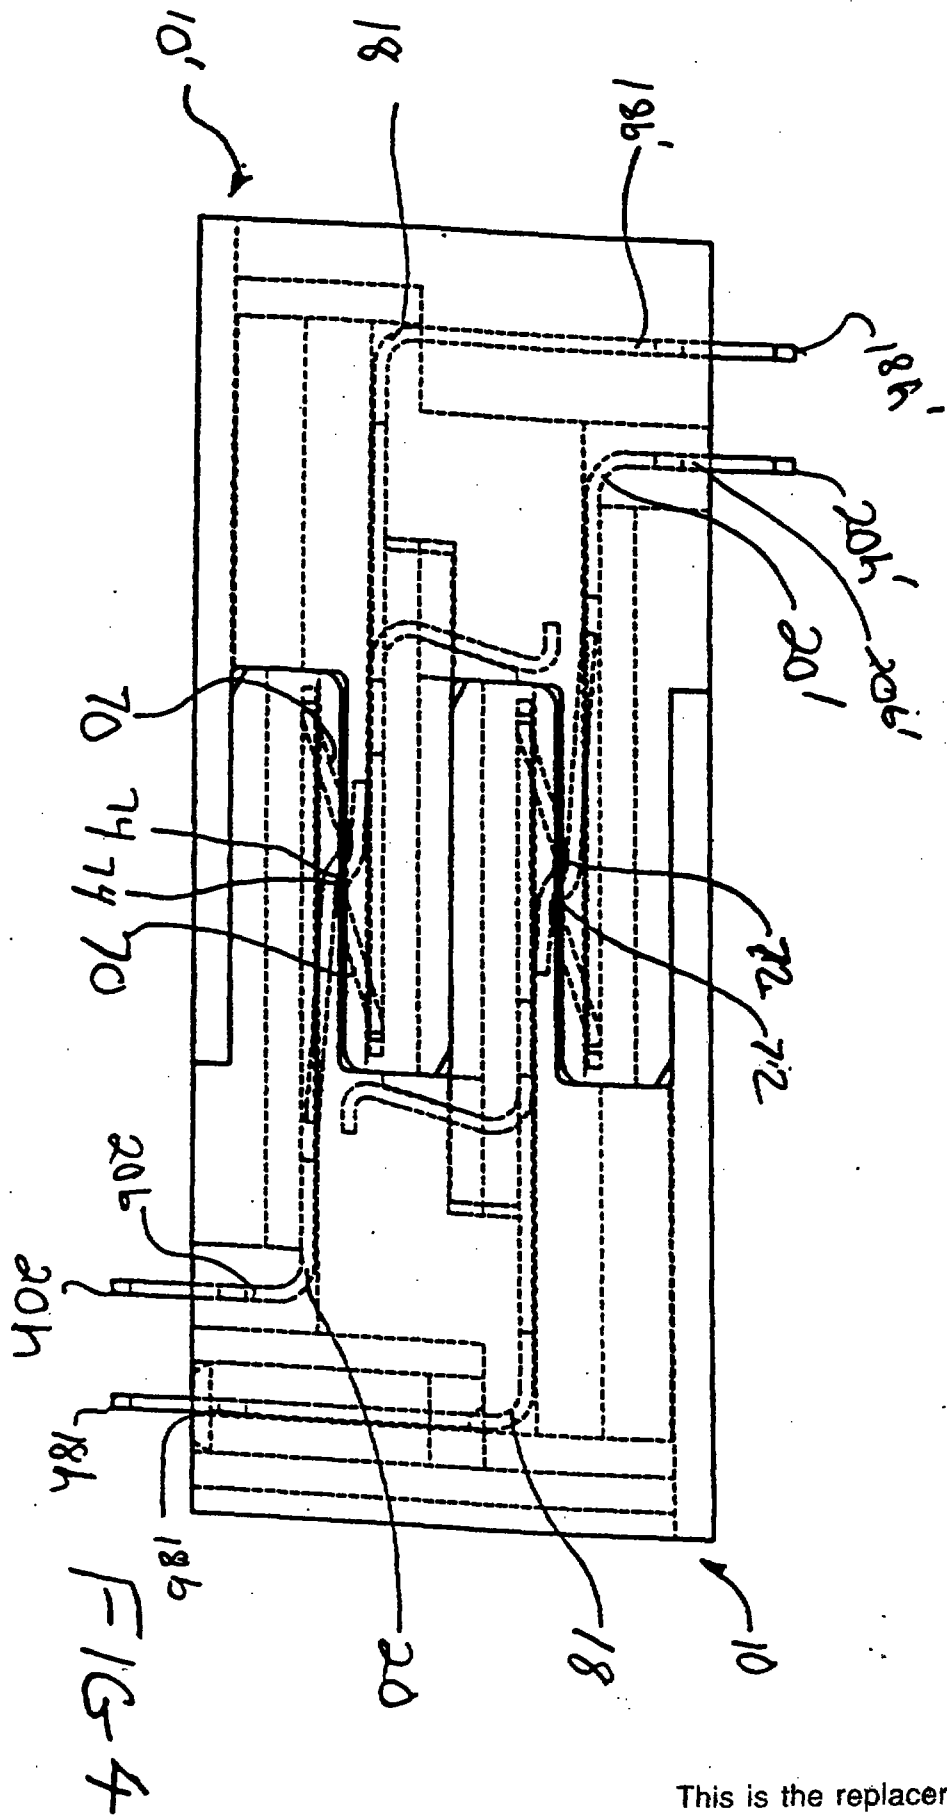

This is the replacement sheet

Date: 13 JAN 1997

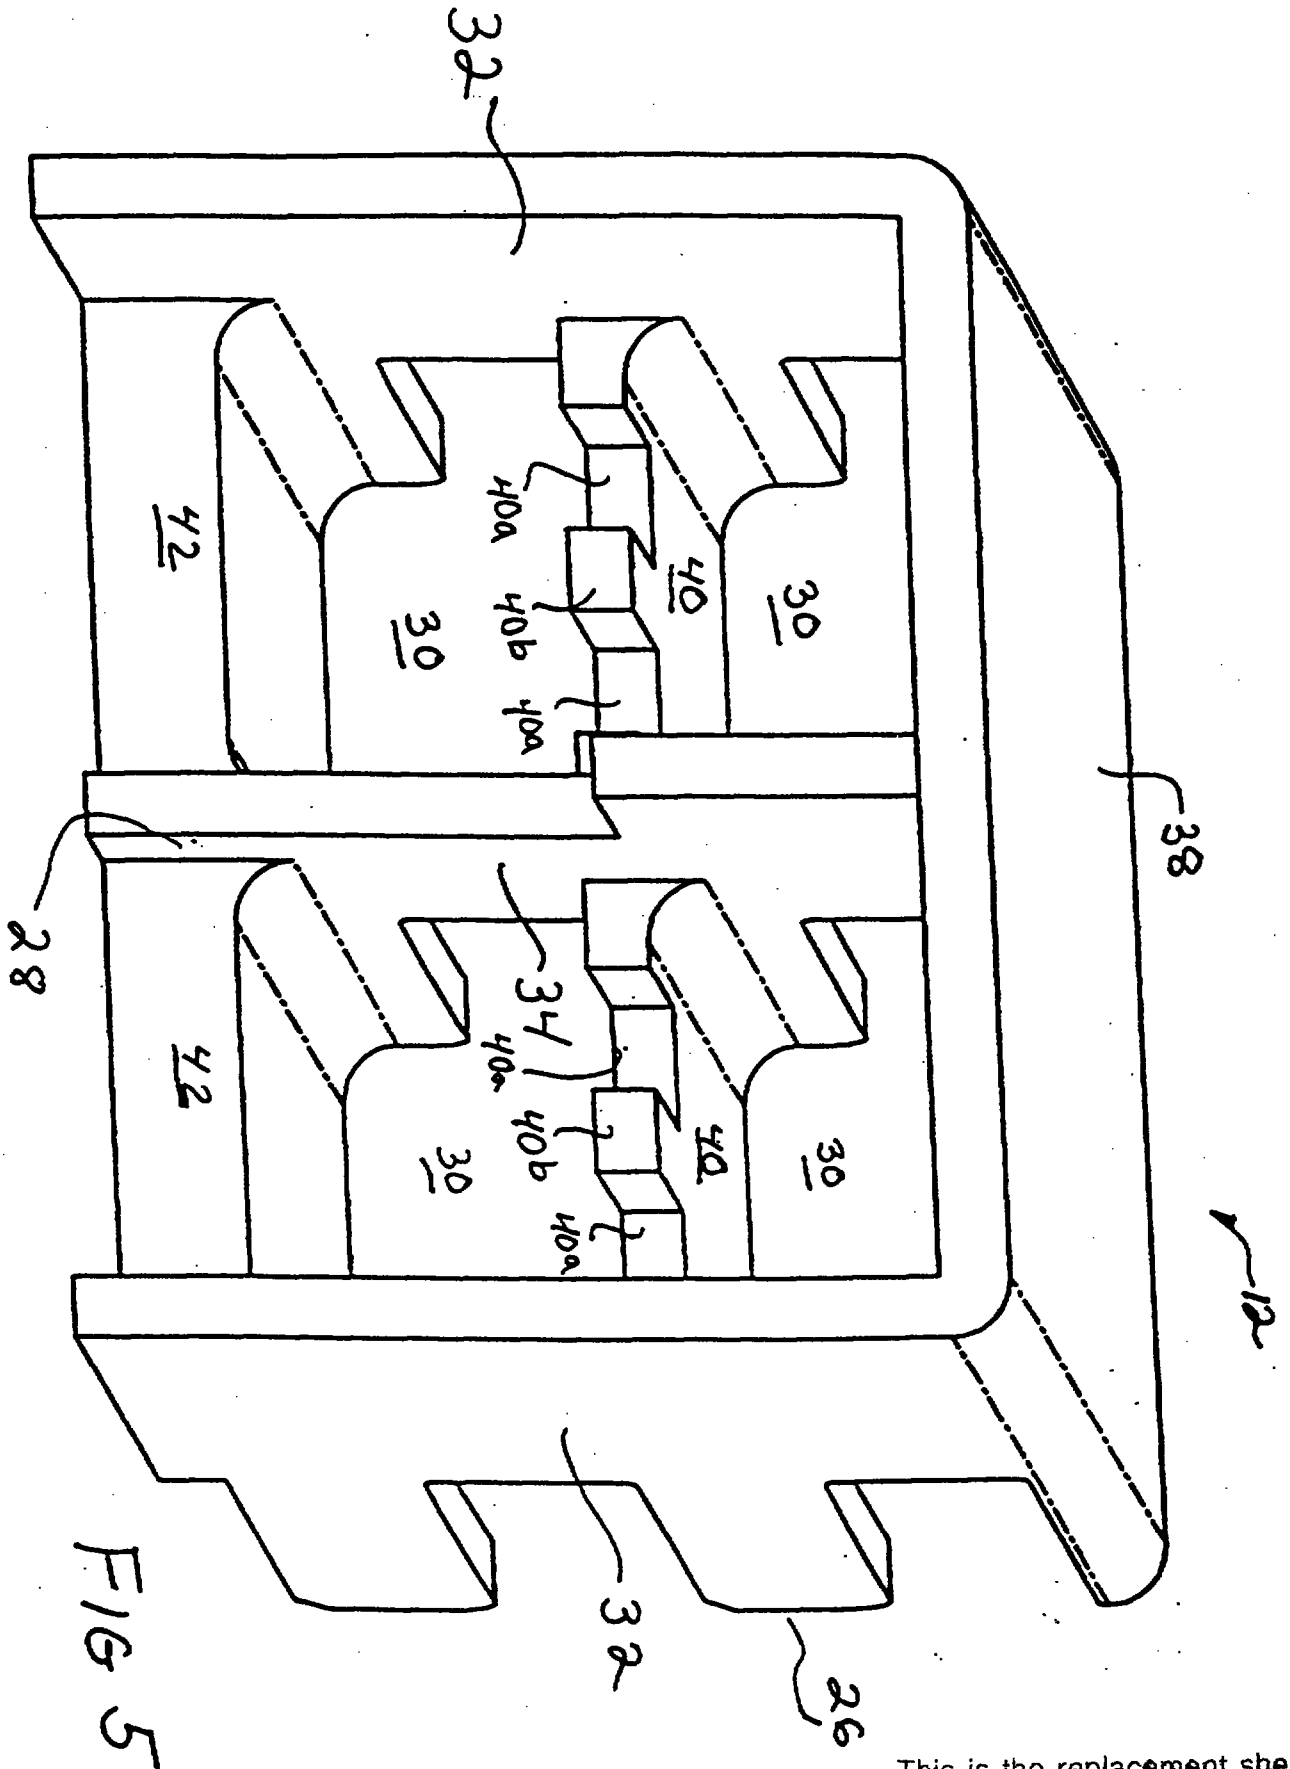

This is the replacement sheet

Date: 13 JAN 1997


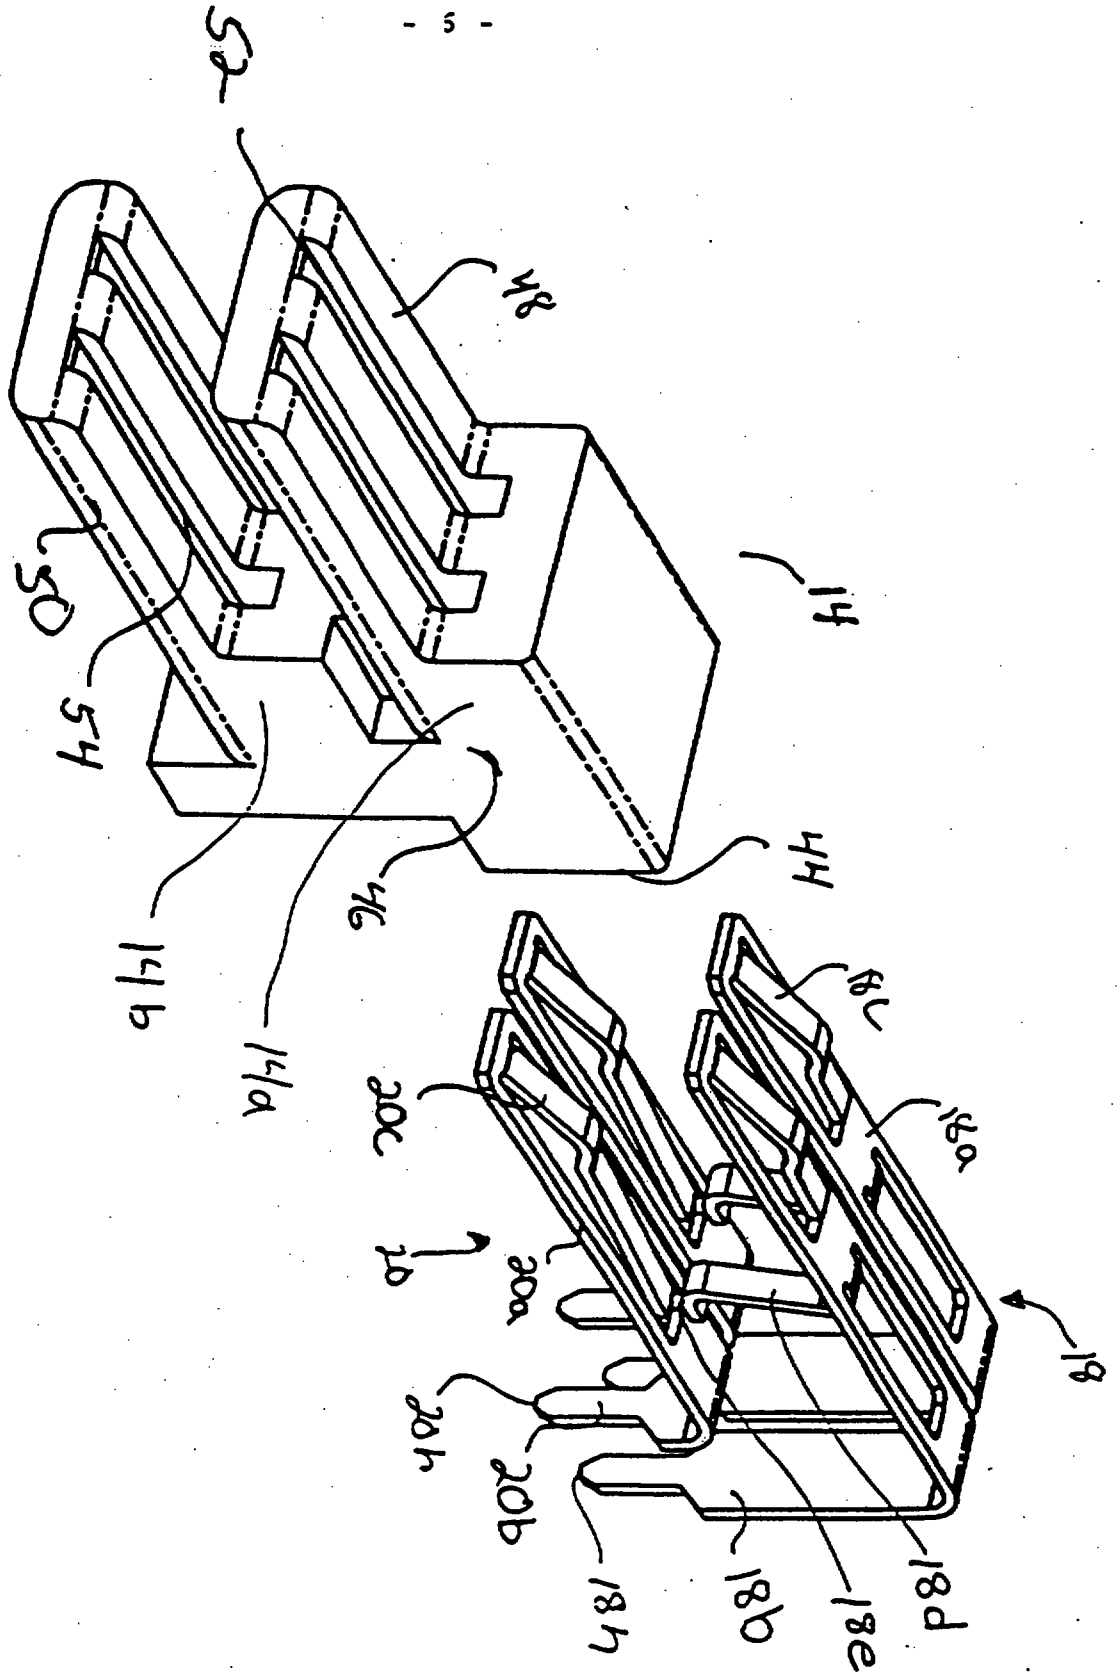


FIG 6

This is the replacement sheet

Date: 13 JAN 1997

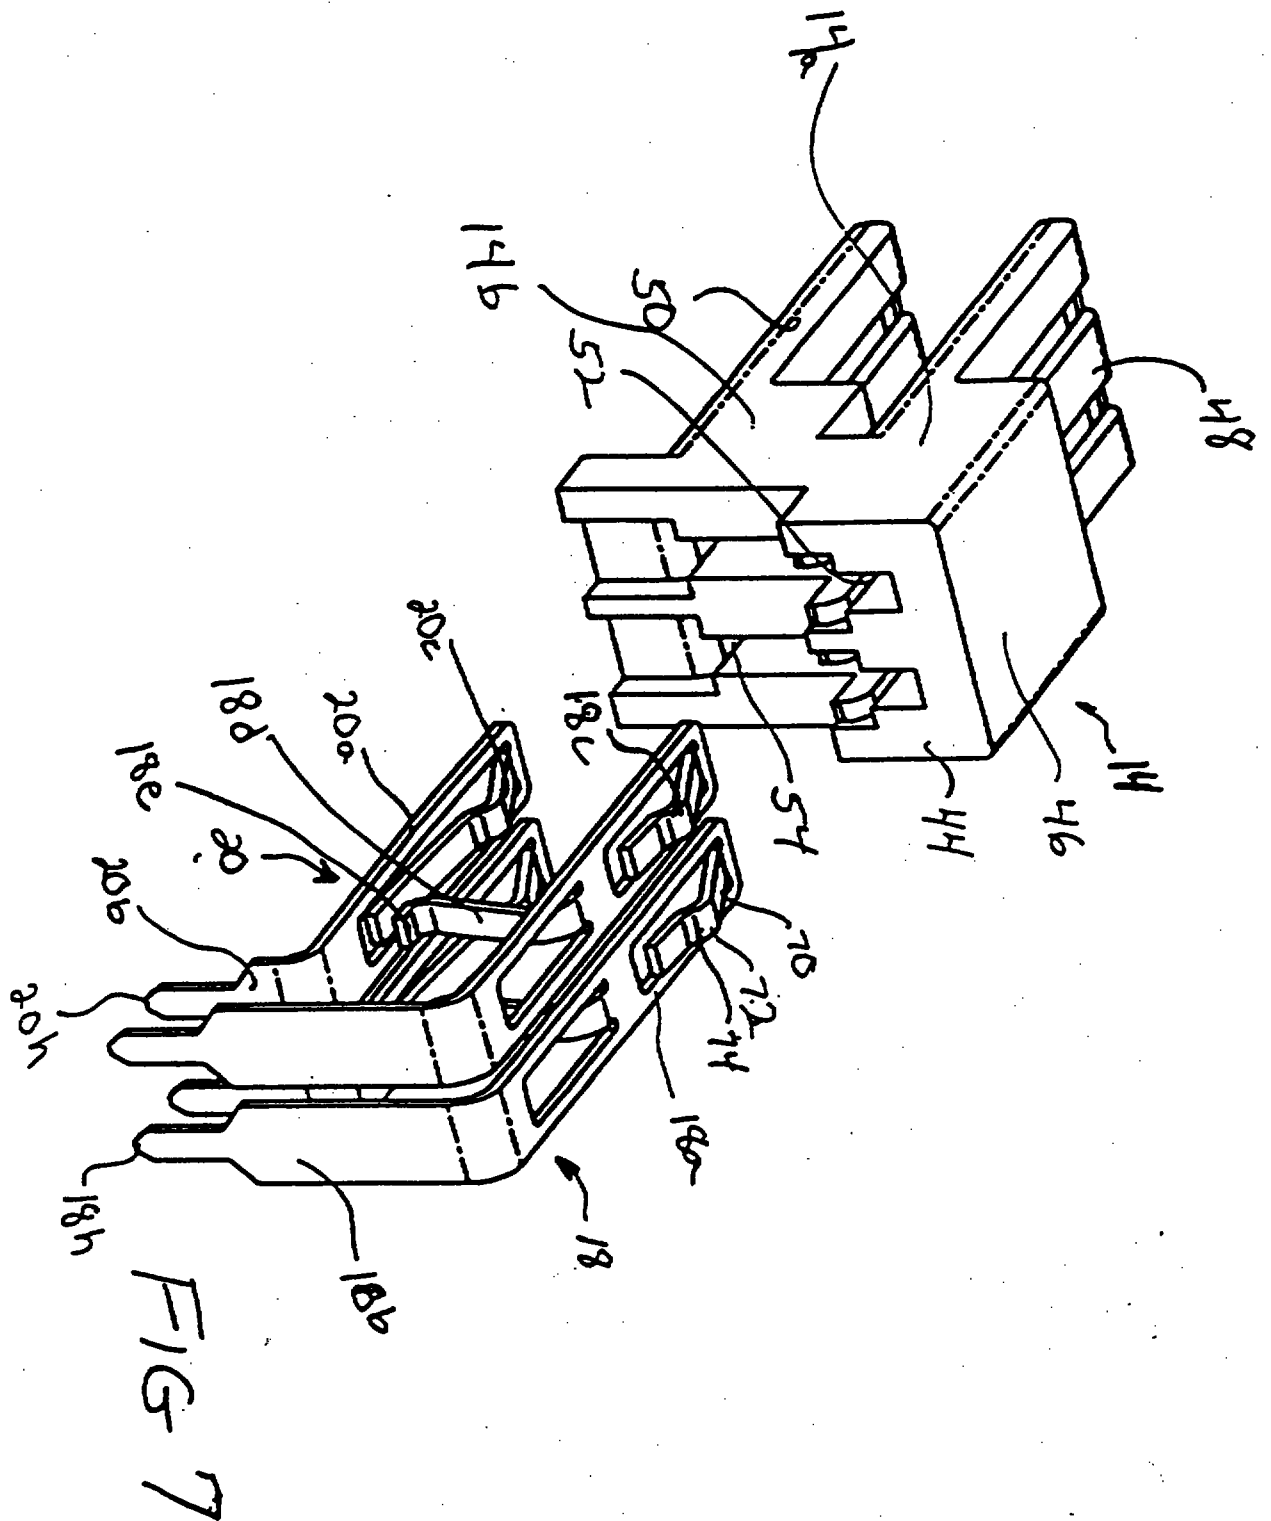

This is the replacement sheet

Date: 13 JAN 1997

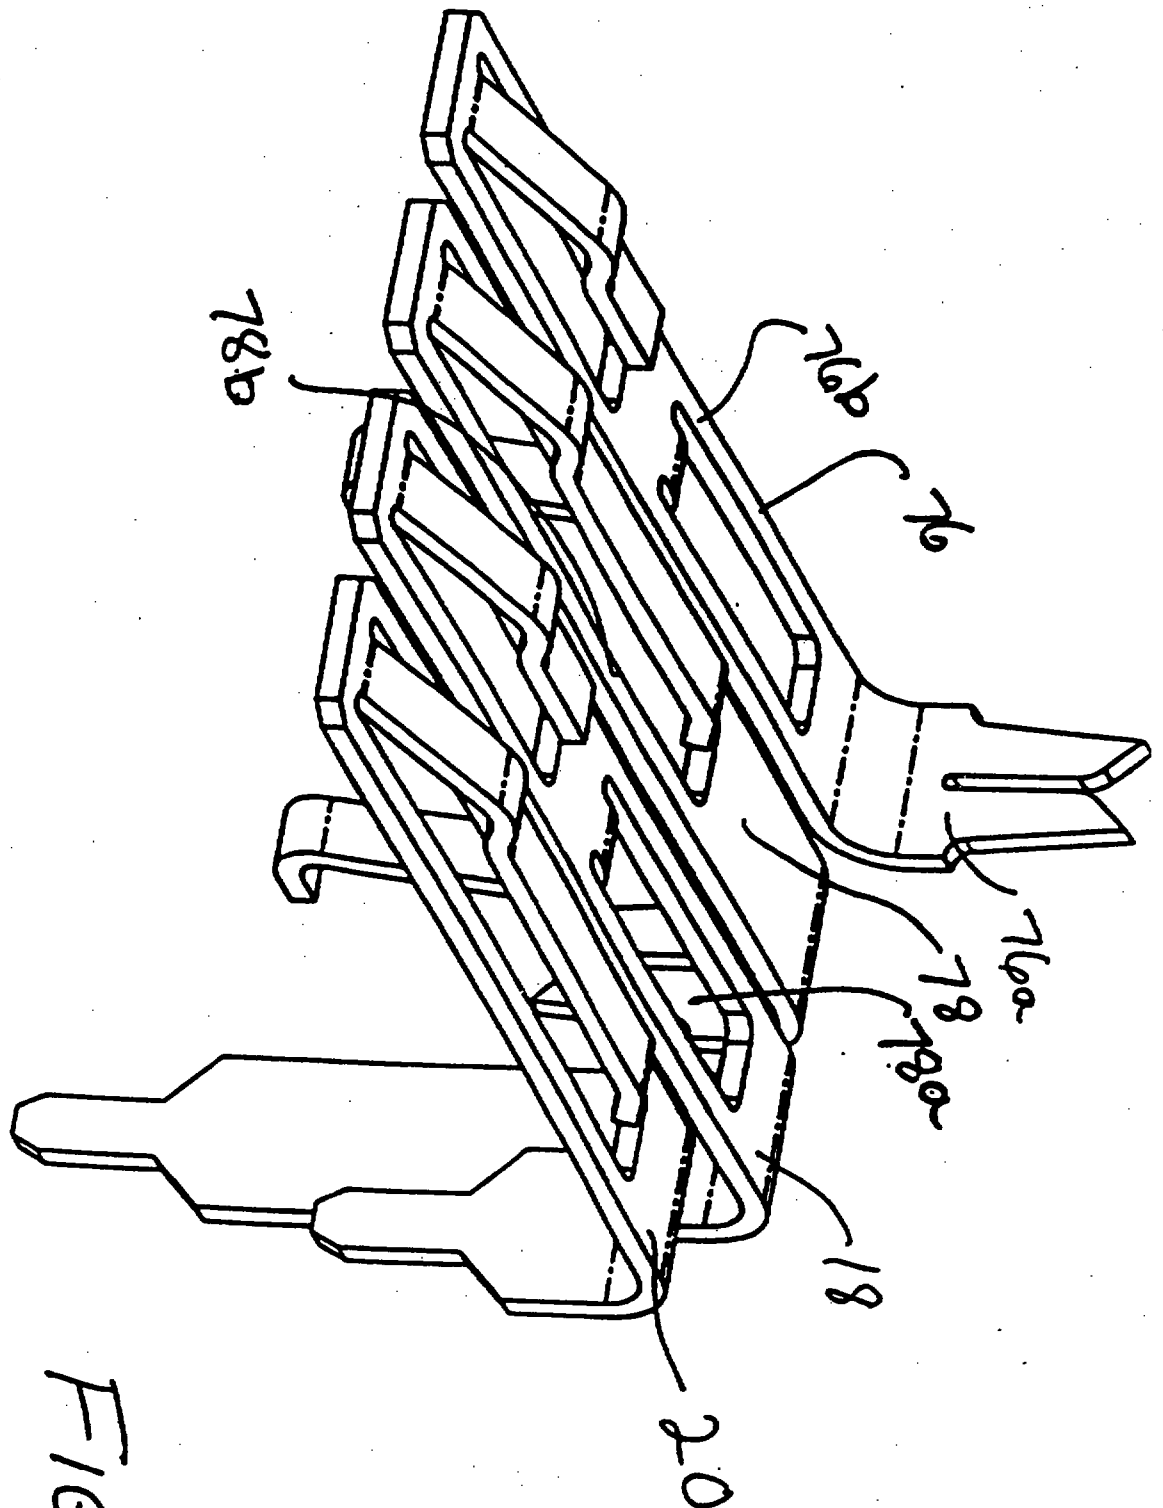


FIG 8

This is the replacement sheet

Date: 13 JAN 1997

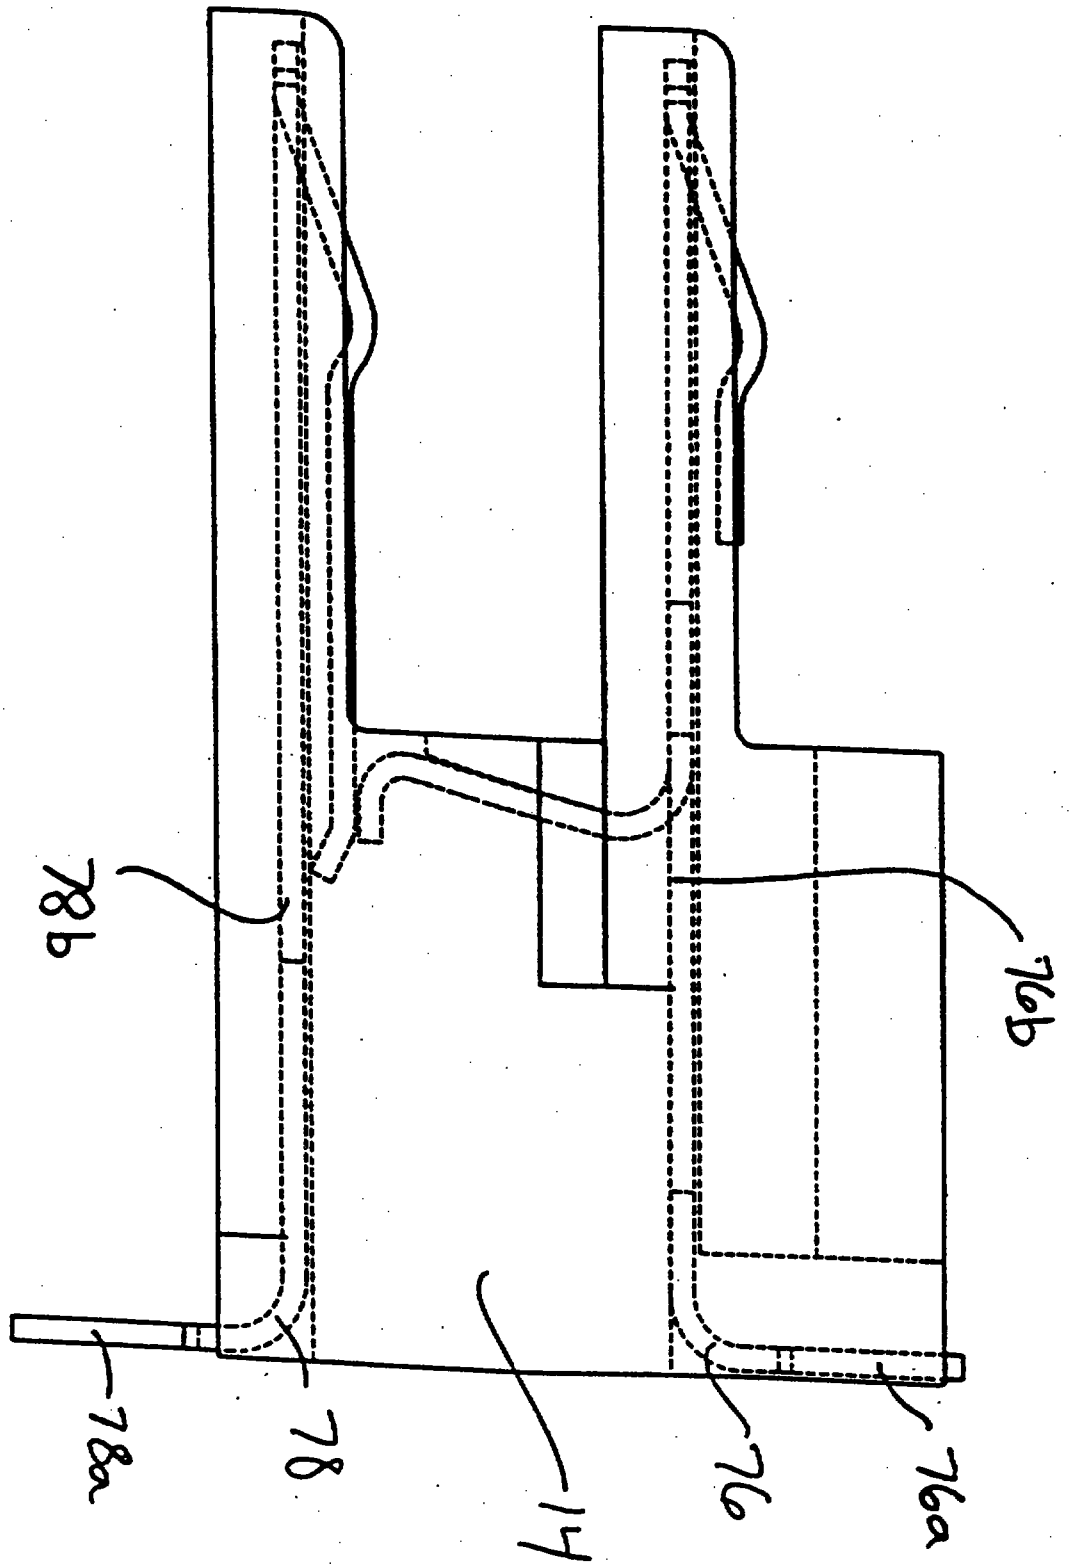


FIG 9

This is the replacement sheet

13 JAN 1997

Date:

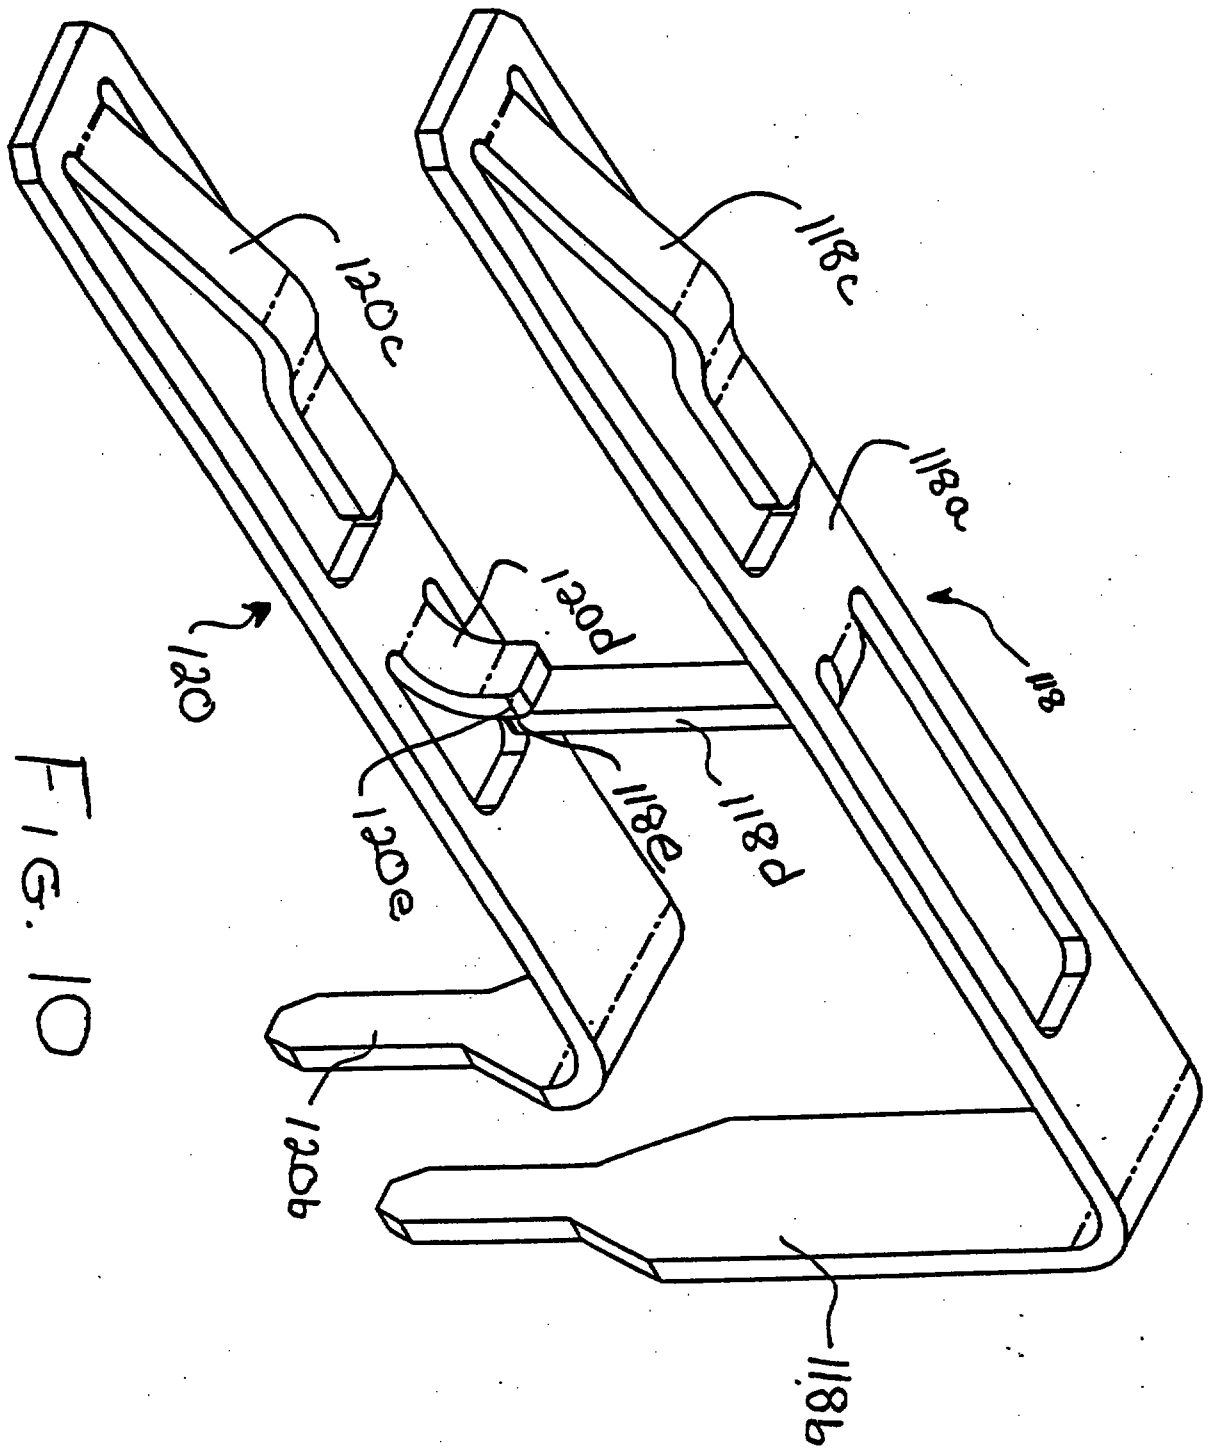


FIG. 10

This is the replacement sheet

Date: 13 JAN 1997

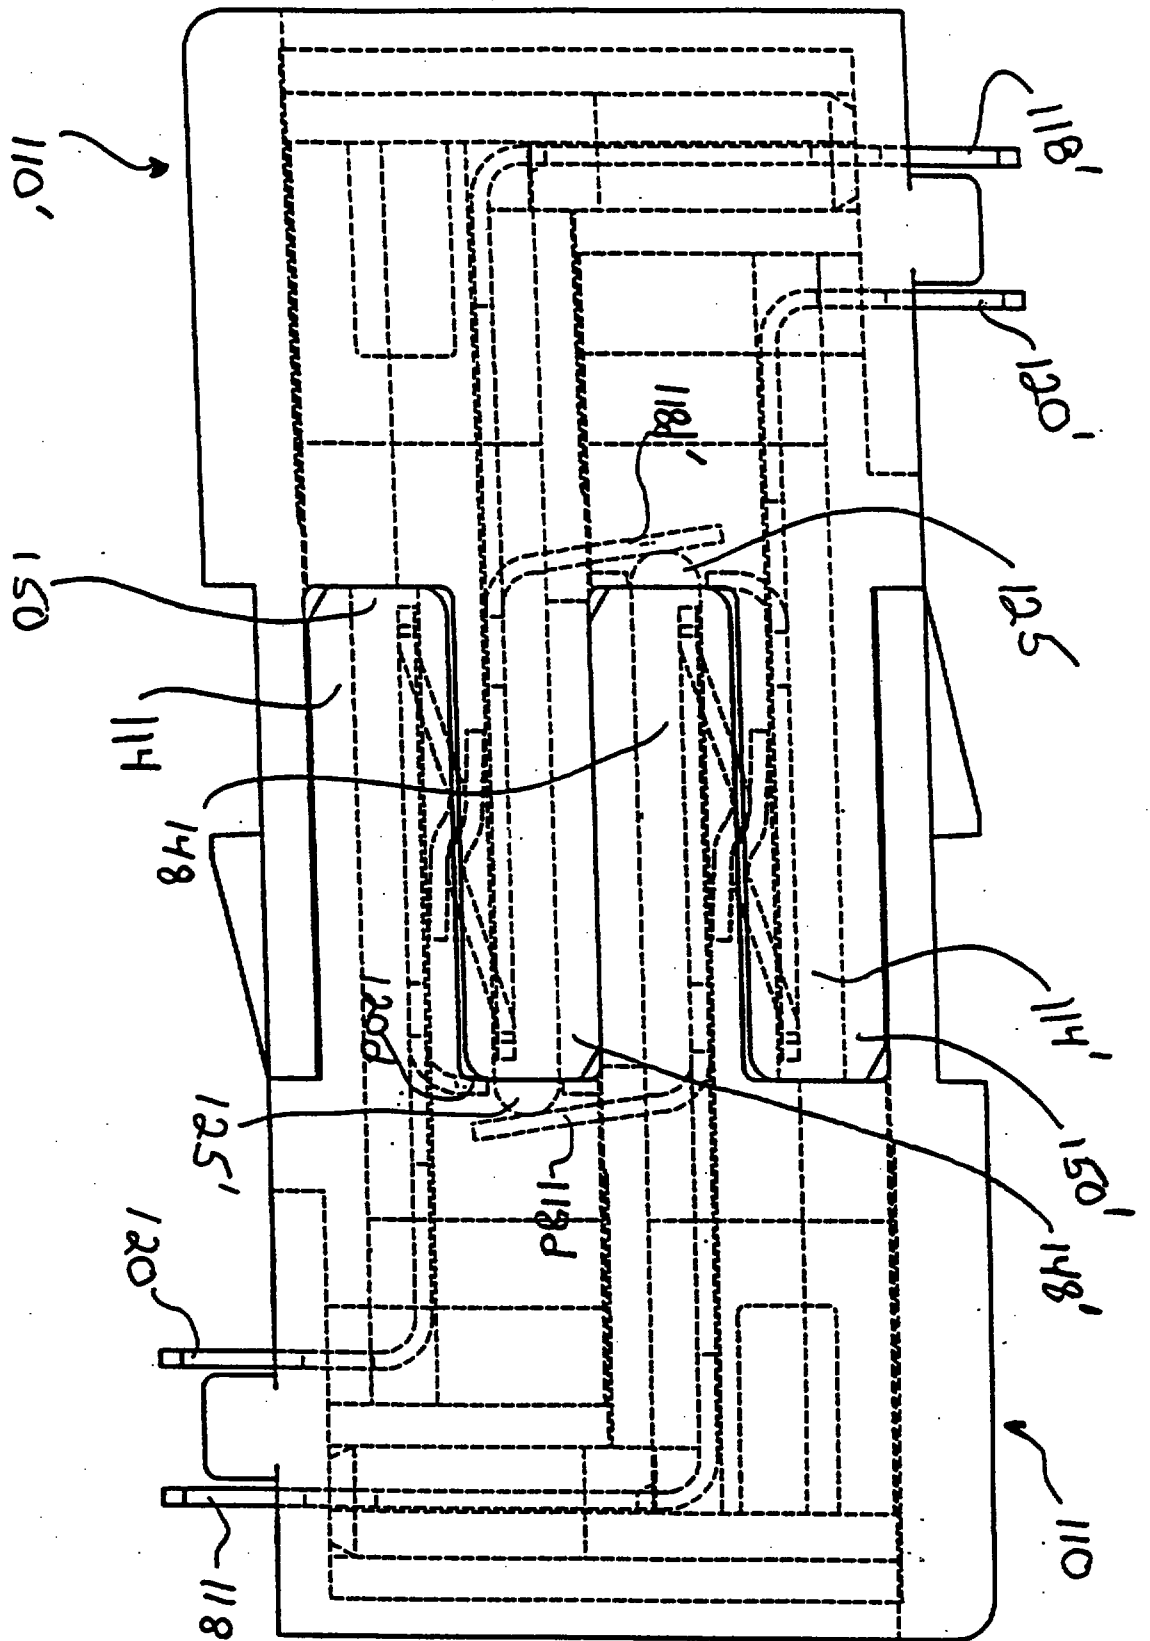


FIG. 11

This is the replacement sheet

Date: 13 JAN 1997

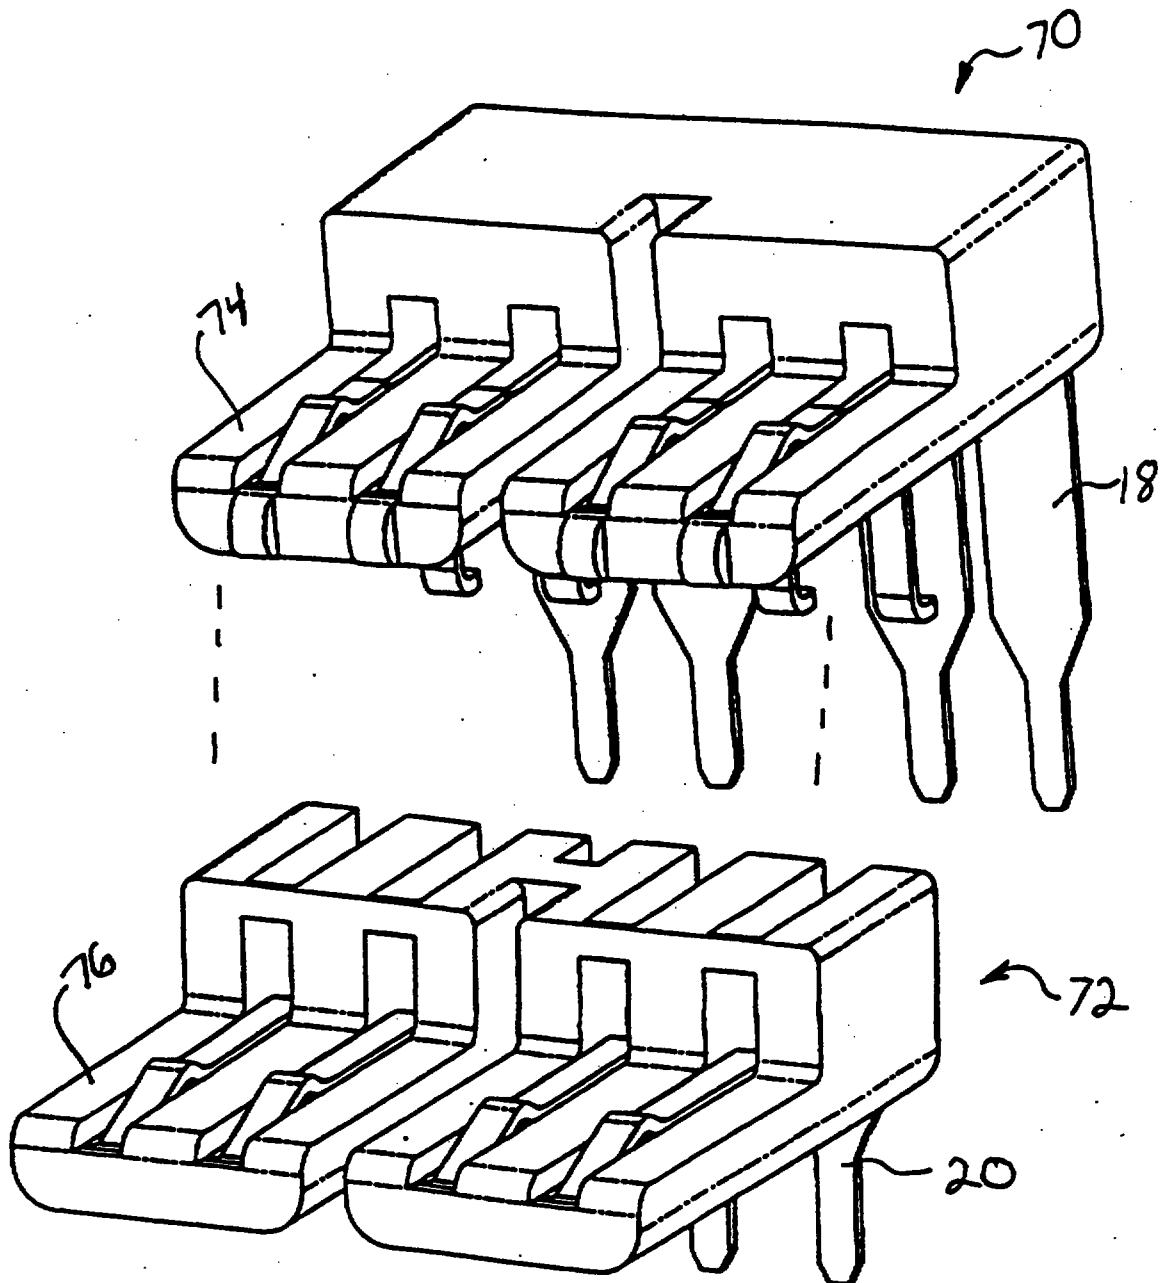


FIG 12 - 0028000

This is the replacement sheet

Date: 13 JAN 1997