9803489-5

RTMP's copy

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 20/18, 19/04, 7/00 — A1

(11) International Publication Number: WO 97/24723

(43) International Publication Date: 10 July 1997 (10.07.97)

(21) International Application Number: PCT/GB96/02984

(22) International Filing Date: 4 December 1996 (04.12.96)

(30) Priority Data:
08/578,869 28 December 1995 (28.12.95) US

(71) Applicant: INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; Old Orchard Road, Armonk, NY 10504 (US).

(71) Applicant *(for MC only)*: IBM UNITED KINGDOM LIMITED [GB/GB]; P.O. Box 41, North Harbour, Portsmouth, Hampshire PO6 3AU (GB).

(72) Inventors: ASTHANA, Praveen; 9110 E. Calle Maria, Tucson, AZ 85710 (US). KULAKOWSKI, John, Edward; 7541 E. Knollwood Place, Tucson, AZ 85715 (US).

(74) Agent: WALDNER, Philip; IBM United Kingdom Limited, Intellectual Property Dept., Hursley Park, Winchester, Hampshire SO21 2JN (GB).

(81) Designated States: CN, CZ, HU, JP, KR, PL, RU, SG, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

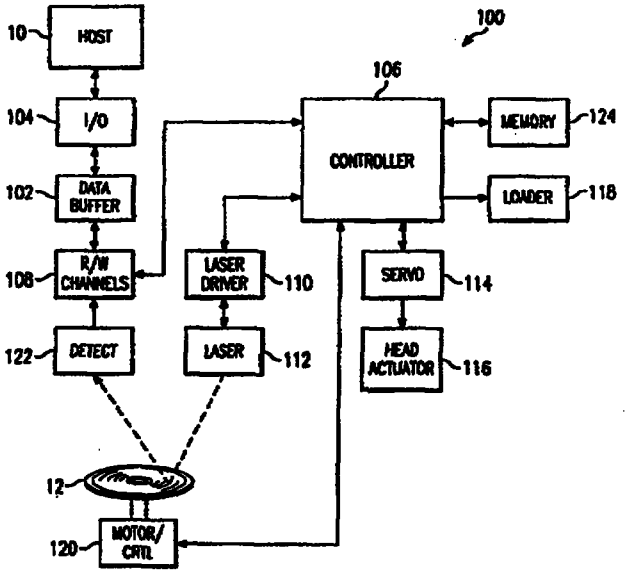
REPLACED SHEETS SG

- ☑ Description : paged ..3... to paged ..4....
- ☑ Claim(s) : paged ..8... to paged ..10....
- ☐ Drawing(s) : paged ..... to paged .....
- ☐ Abstract : paged ..... to paged .....

(54) Title: CD-ROM RECORDING

(57) Abstract

Methods for recording information onto CD-Recordable and CD-Erasable optical disks (12) are provided. In a first embodiment, after a session or packet of data is recorded, it is verified to detect unrecoverable errors. If no such errors are present, the session or packet is fixed and recording ends. If an unrecoverable error is detected, the session or packet is re-recorded in an area of the disk immediately following the originally recorded area. When the recorded data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas on the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.



THIS SHEET HAS BEEN REPLACED

CD-ROM RECORDING

TECHNICAL FIELD OF THE INVENTION

The present invention relates to CD-R (recordable) and CD-E (erasable) recording, and in particular, to detecting recording errors and improving data reliability in CD-R and CD-E systems.

BACKGROUND OF THE INVENTION

Digital CD (compact disk) format optical systems were originally developed for mass distribution of music (audio files) with higher quality reproduction than was possible with analog tape or record systems. CD-ROM systems are an offspring of audio CD systems and used for mass distribution of computer-readable information (which can include audio, video and text as well as conventional computer "data"). Both audio CD's and CD-ROM's are pre-recorded by a stamping process and cannot be recorded onto by the user. New systems are being marketed to permit the user to record information on the media once (CD-R); newer systems that permit the user to record and erase information and to record new information onto the media (CD-E).

The format in which data is recorded onto CD-R and CD-E optical media (collectively referred to herein as CD-R/E) is substantially the same. Under current industry standards, each disk can hold up to 650 MB of data partitioned into up to 99 tracks (equivalent to 99 independently addressable files) when recorded during a single session. This limit is imposed by the number of entries that can be made in the Table of Contents (TOC) recorded on the disk. (It should be noted that efforts are being made to increase the disk capacity). A disk may also be partitioned into up to 45 sessions (and each session may be partitioned into one or more tracks) limited by the capacity of the disk to contain the recorded data and the required inter-session gaps. Consecutive sessions are separated by an inter-session gap (11,400 physical blocks for the first gap and 6,900 physical blocks for subsequent gaps) which includes a lead-in area (LIA) and a lead-out area (LOA). When recording, the optical head of the CD-R/E drive is located at the beginning of the recordable area of the disk (at the end of the last session if a multi-session disk), the inter-session gap is allocated, and one or more tracks of data is recorded. At the completion of recording the session, the LIA and LOA are written and the TOC (located in the program memory area (PMA) of the disk prior to the first user recordable area) is updated in a process known as "fixing". Recorded as a part of the LIA and the LOA is a copy of the TOC containing information regarding the starting track address of the current session as well as of all prior recorded sessions and the starting address of each

track. When all of the data for the session has been recorded, the LIA and LOA recorded, the TOC is updated and the session is deemed to be "fixed"; the just recorded information cannot be re-recorded, corrected or otherwise modified in the same session area. Any modified data must be recorded in a new session and the TOC updated. Incremental packet recording is similar but with the input data broken into fixed length (or, in some versions, variable length) "packets", each with a link block, a LIA, a LOA and the data field. There is no limit on the number of packets which can be recorded, up to the available capacity of the disk.

There are currently no reliable methods for detecting and correcting errors encountered during the recording process of CD-R or CD-E media. These recording errors resulting from physical defects in the media, surface scratches, finger prints and other contamination can all cause permanent errors on read back rendering all or part of the data unrecoverable or defective. While a one or two consecutive bit unrecoverable error might not be a significant problem if audio or video information is involved, such an unrecoverable error in computer data is very serious.

In contrast, when data recorded onto magneto-optical (MO) or write-once, read-many (WORM) optical media is found to be defective, the data contents of the defective sector can be re-written to a spare sector in a designated spare area on the disk and a defect management table updated with a pointer from the defective sector to the replacement sector. The defect management table is then used to re-direct all references to the defective sector to the replacement sector, thus avoiding an error on read back.

SUMMARY OF THE INVENTION

In view of the foregoing, it is an object of an embodiment of the present invention to provide a robust CD-R/E drive system for detecting recording defects in CD-R/E media and reducing read back failures.

It is another such object to provide such a system without adversely impacting drive performance.

There is disclosed providing methods for recording information onto CD-Recordable and CD-Erasable optical disks. In a first embodiment, after a session or packet of data is recorded, it is verified to detect unrecoverable errors. If no such errors are present, the session or packet is fixed and recording ends. If an unrecoverable error is detected, the session or packet is re-recorded in an area of the disk immediately following the originally recorded area. When the recorded

data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas on the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.

According to a first aspect of the invention there is provided a method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving a data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if no unrecoverable errors are found in the recorded data, fixing the session by recording lead-out and lead in areas and updating a table of contents which contains an entry indicating location of the beginning of the first selected area; and

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

reading the re-recorded data for the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the second selected area and not the first selected area.

According to a second aspect of the invention there is provided the method of Claim 1, wherein said step of reading the recorded data for the presence of unrecoverable errors in the first selected area comprises the steps of:

after the entire data has been recorded in the first selected area, re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read.

This Sheet Has Been Replaced



This Sheet Has Been Replaced

Advantageously said step of reading the recorded data for the presence of unrecoverable errors in the first selected area comprises the steps of:

after the entire data has been recorded in the first selected area, re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read.

Preferably said step of reading the recorded data for the presence of unrecoverable errors in the first selected area comprises the steps of:

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the packet of data is being recorded:

halting the recording of data;

re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read.

The foregoing and other features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a CD-R/E drive of the present invention;

Fig. 2 is a flow chart of one embodiment of the present invention; and

Fig. 3 is a flow chart of a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a block diagram of a CD-R/E drive 100 of the present invention interconnected with a host device 10 for writing data to and reading data from a CD-R/E format optical disk 12. The drive 100 and the host 10 exchange data into and out of a buffer 102 through an interface 104. A microprocessor controller 106 controls all of the functions of the drive 100, including read/write channels 108, a laser driver 110 (which, in turn, controls a laser 112), servo controls 114 (which direct the motion of the optical read/write head 116), a disk loader 118 and a

spindle motor and controller 120. A detector module 122 receives laser light from the laser 112 which has been reflected off of a surface of the disk 12. A memory 124 can include both read only (ROM) and random access (RAM) memory for retaining control instructions and working data, respectively.

A first embodiment of the present invention will be described with reference to the flow chart of Fig. 2. Data to be recorded is received by the drive 100 from the host 10 through the interface 104 (Step 200). The drive 100 then reads a TOC (Step 202) from the program memory area (PMA) which contains the physical location (based upon recording time from the beginning of the recordable area) of each track and the starting track number of each session. In multi-session or track-at-once recording, a new recording session is then begun by moving the optical head 116 (Step 204) and focusing the laser beam onto the surface of the disk 12 immediately following the end of the last recorded session (or to the first recording area near the inner diameter of the disk 12 if no sessions have previously been recorded). The controller 106 then directs that lead-in blocks be allocated (Step 206) and one or more tracks are recorded with user data (Step 208). If more than one track is to be recorded during the session, at the completion of writing each track, the optical head 116 is repositioned to the beginning of the track (Step 210) and the just-recorded data is verified (Step 212). Although a bit-by-bit comparison of data can be performed when there is a requirement for the highest level of recording quality, it is faster and requires fewer resources for the data to be read by the laser 112 and parity checked to be sure that there are no unrecoverable errors (Step 214).

If only one track is to be recorded during the session, at the completion of writing the track and before the session is fixed, the optical head 116 is repositioned to the beginning of the track or session and the just-recorded data is verified. Again, a bit-by-bit comparison of data can be performed, but it is faster and requires fewer resources for the data to be read by the laser 112 and parity checked to be sure that there are no unrecoverable errors.

In both single- and multi-track sessions, when all of the data can be successfully read, the session is fixed by recording the LIA, the LOA and updating the TOC in the PMA (Step 216).

On the other hand, physical defects in the media, surface scratches, finger prints or other contamination can cause unrecoverable read errors to occur. If such errors are detected, the data is re-recorded beginning in the area of the disk 12 immediately following the just recorded area (whether it be a track or a session), thereby bypassing the defective area

on the disk (Step 218). The re-recorded data is again verified (Step 212) and when the data can be read successfully, the session is fixed by recording the LIA, the LOA and updating the TOC (Step 216). The TOC will contain the location of the beginning of the session (that is, the location of the LIA) and the physical location of the track or tracks that have been recorded without error (the defective areas will not appear in the TOC). Consequently, the area of the session containing the unrecoverable defects does not appear in any TOC, cannot be addressed or accessed and will not be transferred to the host by the drive.

If the session is recorded using the "packet" writing process, at the completion of writing each packet, the optical head 116 is repositioned to the beginning of the packet and the just-recorded data is verified. Any packets which contain an unrecoverable error are re-recorded in the area of the disk immediately following the packet with the defect. Information regarding this fact would then be recorded in the TOC and the defective area bypassed during read back. Currently, the TOC structure does not have the capability to record the address of validly recorded packets but the size of the TOC could be extended to contain this information.

A second embodiment of the present invention will now be described with reference to the flow chart of Fig. 3. The initial steps are the same as the initial steps of the first embodiment (Steps 300-308). Rather than record all of the customer data before verifying, however, the data is verified as it is recorded (Step 310) by analyzing the light from the laser 112 after it has been reflected from the surface of the disk 12. If the analysis indicates that the data can be successfully read (Step 312), the session is fixed as described above (Step 314). If unrecoverable errors exist, recording is halted at the end of the recordable unit (packet, track or session) (Step 316). The appropriate recordable unit is re-recorded beginning at a location immediately following the recordable unit containing the defective area (Step 318). Once the data is successfully verified, the session is fixed as described above. By re-recording data in an area immediately following the recordable unit containing the defective area before writing the next track or fixing the session, read-back performance is not degraded and unnecessary consumption of a limited number of tracks or sessions is avoided.

In summary, therefore, there are provided methods for recording information onto CD-Recordable and CD-Erasable optical disks are provided. In a first embodiment, after a session or packet of data is recorded, it is verified to detect unrecoverable errors. If no such errors are present, the session or packet is fixed and recording ends. If an unrecoverable error is detected, the session or packet is re-recorded in

an area of the disk immediately following the originally recorded area. When the recorded data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas on the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.

While the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention.

CLAIMS

1. A method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving a data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if no unrecoverable errors are found in the recorded data, fixing the session by recording lead-out and lead in areas and updating a table of contents which contains an entry indicating location of the beginning of the first selected area; and

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

reading the re-recorded data for the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the second selected area and not the first selected area.

2. The method of Claim 1, wherein said step of reading the recorded data for the presence of unrecoverable errors in the first selected area comprises the steps of:

This Sheet Has Been Replaced

after the entire data has been recorded in the first selected area, re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read.

3. The method of Claim 1, wherein said step of reading the recorded data for the presence of unrecoverable errors in the first selected area comprises the steps of:

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the packet of data is being recorded:

halting the recording of data;

re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read.

4. An optical drive unit:

a disk loader;

an optical head;

read and write channels; and

a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk by:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

This Sheet Has Been Replaced

if a suspected recording error is detected while the data is being recorded:

halting the recording of data;

re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read;

if recorded data cannot be successfully read and an unrecoverable error is found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data; and

when the recorded data can be successfully read, fixing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the second selected area and not the first selected area.

This Sheet Has Been Replaced

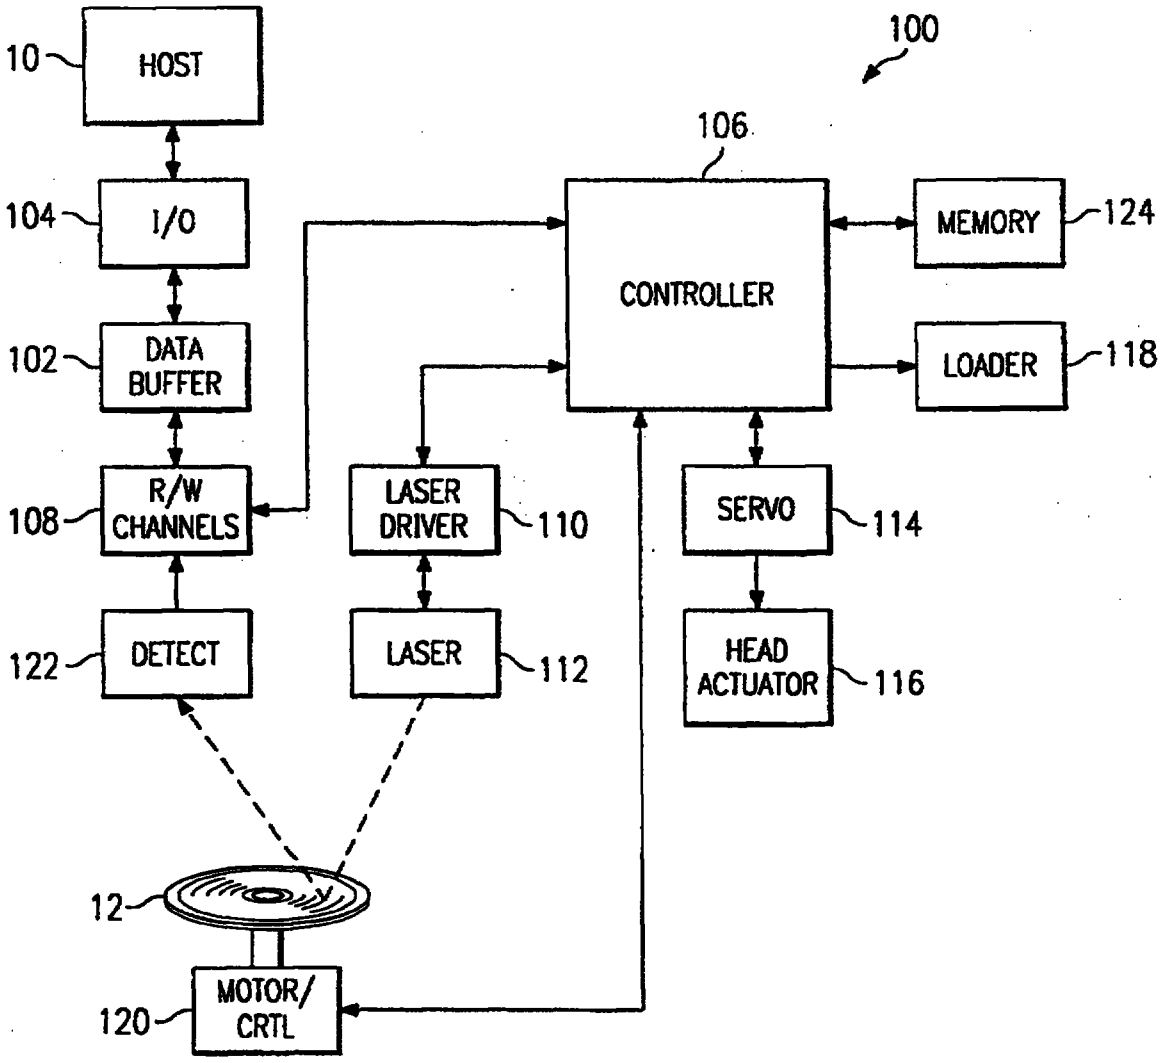

10
HOST
100
106
104
I/O
CONTROLLER
MEMORY
124
102
DATA BUFFER
LOADER
118
108
R/W CHANNELS
LASER DRIVER
110
SERVO
114
122
DETECT
LASER
112
HEAD ACTUATOR
116
12
120
MOTOR/ CRTL

FIG. 1

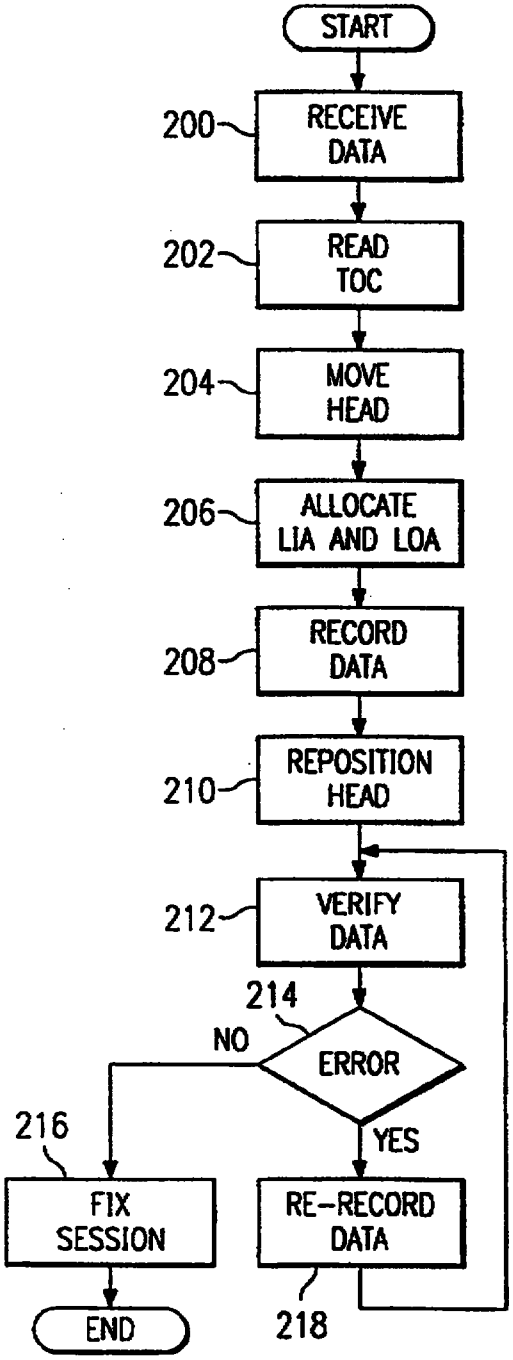

START
200
RECEIVE DATA
202
READ TOC
204
MOVE HEAD
206
ALLOCATE LIA AND LOA
208
RECORD DATA
210
REPOSITION HEAD
212
VERIFY DATA
214
NO
ERROR
YES
216
FIX SESSION
RE-RECORD DATA
END
218

FIG. 2

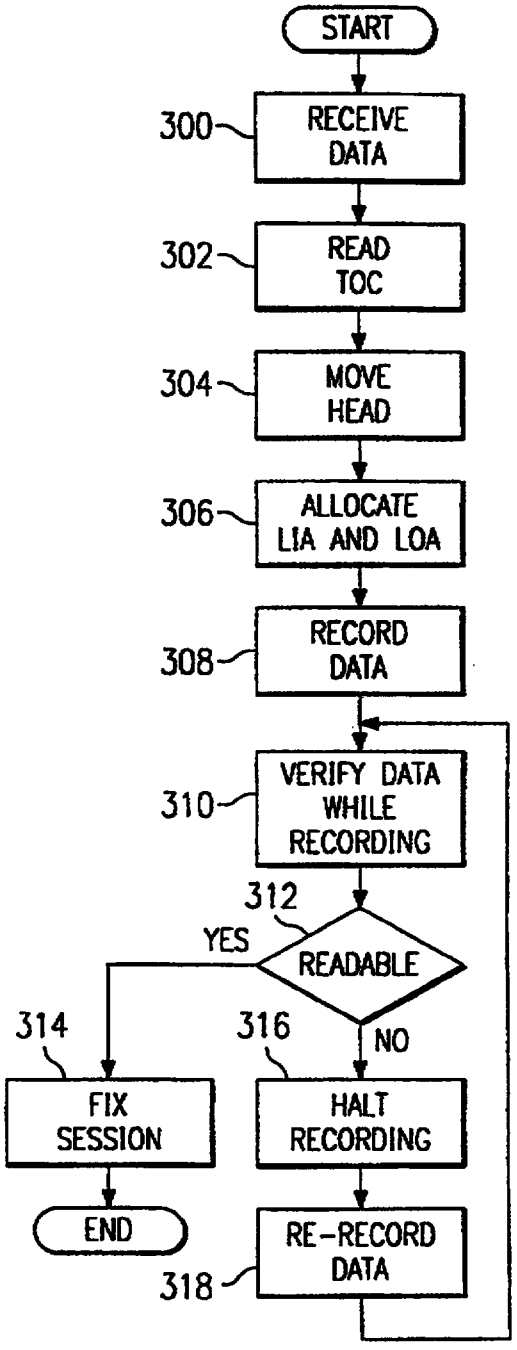

START
300
RECEIVE DATA
302
READ TOC
304
MOVE HEAD
306
ALLOCATE LIA AND LOA
308
RECORD DATA
310
VERIFY DATA WHILE RECORDING
312
YES
READABLE
NO
314
316
FIX SESSION
HALT RECORDING
END
RE-RECORD DATA
318

FIG. 3

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas on the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.

According to a first aspect of the invention there is provided a method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording a portion of the data;

reading the recorded portion of data for the presence of unrecoverable errors;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording the portion of the data;

reading the re-recorded data for the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas.

According to a second aspect of the invention there is provided a method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the portion of data is being recorded:

halting the recording of data at the end of the portion;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

verifying while re-recording, the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not the of areas containing unrecognizable errors.

According to a third aspect of the invention there is provided an optical drive unit:

a disk loader;

an optical head;

read and write channels; and

a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk by:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the data is being recorded:

halting the recording of data;

re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read;

if recorded data cannot be successfully read and an unrecoverable error is found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data; and

when the recorded data can be successfully read, fixing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the second selected area and not the first selected area.

THIS SHEET HAS BEEN REPLACED

According to a fourth aspect of the invention there is provided an optical unit:

a disk loader;

an optical head;

read and write channels;

a controller for directing the recording of a plurality of packets of data onto a CD-R/E storage disk:

means for receiving a packet of data;

means for positioning an optical head at the beginning of a first selected area on the disk to which the data packet is to be recorded;

means for opening a session by allocating lead-in and lead-out areas;

means for recording the data packet;

means for repositioning the optical head to the beginning of the first selected area;

means for verifying that the data packet can be successfully read;

means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area and re-recording the data packet if the recorded data cannot be successfully read and as unrecoverable error is found in the recorded data packet.

The foregoing and other features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a CD-R/E drive of the present invention;

Fig. 2 is a flow chart of one embodiment of the present invention; and

Fig. 3 is a flow chart of a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a block diagram of a CD-R/E drive 100 of the present invention interconnected with a host device 10 for writing data to and reading data from a CD-R/E format optical disk 12. The drive 100 and the host 10 exchange data into and out of a buffer 102 through an interface 104. A microprocessor controller 106 controls all of the functions of the drive 100, including read/write channels 108, a laser driver 110 (which, in turn, controls a laser 112), servo controls 114 (which direct the motion of the optical read/write head 116), a disk loader 118 and a

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

CLAIMS

1. A method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving (200) data to be recorded;

positioning (204) an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening (206) a session by allocating lead-in and lead-out areas;

recording (208) a portion of the data;

reading (212, 310) the recorded portion of data for the presence of unrecoverable errors;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording (218) the portion of the data;

reading (212) the re-recorded data for the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas.

2. A method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, including the steps of:

receiving (300) data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening (306) a session by allocating lead-in and lead-out areas;

recording (308) at least a portion of the data;

while the data is being recorded, analyzing (310) a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the portion of data is being recorded:

halting the recording of data at the end of the portion;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

verifying (310) while re-recording, the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not the of areas containing unrecognizable errors.

3. An optical drive unit:

a disk loader;

an optical head;

read and write channels; and

a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk by:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the data is being recorded:

halting the recording of data;

re-positioning the optical head to the beginning of the first selected area; and

verifying that the recorded data can be successfully read;

if recorded data cannot be successfully read and an unrecoverable error is found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data; and

when the recorded data can be successfully read, fixing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the second selected area and not the first selected area.

4. An optical unit:

a disk loader;

an optical head;

read and write channels;

a controller for directing the recording of a plurality of packets of data onto a CD-R/E storage disk:

means for receiving a packet of data;

means for positioning an optical head at the beginning of a first selected area on the disk to which the data packet is to be recorded;

means for opening a session by allocating lead-in and lead-out areas;

* C L M S *

THIS SHEET HAS BEEN REPLACED

means for recording the data packet;

means for repositioning the optical head to the beginning of the first selected area;

means for verifying that the data packet can be successfully read;

means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area and re-recording the data packet if the recorded data cannot be successfully read and as unrecoverable error is found in the recorded data packet;

means for fixing the session, after success, recording of all the data packets, by recording the lead-in and lead-out areas and updating a table of contents to contain entries indicating the location of the beginning of the successfully recorded data packets and not of the areas containing unrecordable ones.

5. An optical drive unit as claimed in claim 4 further comprising

means for analyzing a read-back signal for the presence of suspected recording errors; and

means for halting the recording of subsequent data packets and initiating the means for repositioning if a suspected recording error is detected while data is being recorded.

This Sheet Has Been Replaced

AMENDED SHEET

data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas of the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.

According to a first aspect of the invention there is provided a method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, said method including the steps of:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording a portion of the data;

reading the recorded portion of data for the presence of unrecoverable errors;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording the portion of the data;

reading the re-recorded data for the presence of unrecoverable errors in the second selected area; and

REPLACEMENT SHEET
03 APR 1999

REPLACEMENT SHEETS SG
☑ Description : paged 3 to paged 4c
☑ Claim(s) : paged 8 to paged 11
☐ Drawing(s) : paged ..... to paged .....
☑ Abstract : paged 12 to paged .....
DATE OF RECEIPT 03 APR 1999

if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas.

According to a second aspect of the invention there is provided a method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, said method including the steps of:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the portion of data is being recorded:

halting the recording of data at the end of the portion;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

REPLACEMENT SHEET
03 APR 1999

verifying while re-recording, the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not the of areas containing unrecognizable errors.

According to a third aspect of the invention there is provided an optical drive unit comprising: a disk loader; an optical head; read and write channels; and a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk; means for receiving data to be recorded; means for positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded; means for opening a session by allocating lead-in and lead-out areas; means for recording a portion of the data; means for reading the recorded portion of data for the presence of unrecoverable errors; means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area, re-recording the portion of the data and reading the re-recorded data for the presence of unrecoverable errors in the second selected area if unrecoverable errors are found in the recorded data; and means for closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data.

According to a fourth aspect of the invention there is provided an optical unit comprising: a disk loader; and optical head; read and write channels; a controller for

REPLACEMENT SHEET
03 APR 1999

directing the recordation of a packet of data onto a CD-R/E optical storage disk; means for receiving data to be recorded; means for positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded; means for opening a session by allocating lead-in and lead-out areas; means for recording at least a portion of the data; means for analyzing a read-back signal for the presence of suspected recording errors while the data is being recorded; means for halting the recording of data at the end of the portion and reading the recorded data for the presence of unrecoverable errors in the first selected area if a suspected recording error is detected while the portion of data is being recorded; means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area, re-recording at least a portion of the data and verifying while re-recording, the presence of unrecoverable errors in the second selected area if unrecoverable errors are found in the recorded data; and means for closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not of the areas containing unrecognizable errors if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions.

The foregoing and other features and advantages of the invention will be apparent form the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings.

REPLACEMENT SHEET
03 APR 1999

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a CD-R/E drive of the present invention;

Fig. 2 is a flow chart of one embodiment of the present invention; and

Fig. 3 is a flow chart of a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a block diagram of a CD-R/E drive 100 of the present invention interconnected with a host device 10 for writing data to and reading data from a CD-R/E format optical disk 12. The drive 100 and the host 10 exchange data into and out of a buffer 102 through an interface 104. A microprocessor controller 106 controls all of the functions of the drive 100, including read/write channels 108, a laser driver 110 (which, in turn, controls a laser 112), servo controls 114 (which direct the motion of the optical read/write head 116), a disk loader 118 and a

REPLACEMENT SHEET
03 APR 1999

CLAIMS

1. A method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, said method including the steps of:

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording a portion of the data;

reading the recorded portion of data for the presence of unrecoverable errors;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording the portion of the data;

reading the re-recorded data for the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas.

2. A method of recording data onto a CD-R/E optical storage disk, the disk capable of storing data in a plurality of variable sized recording sessions, said method including the steps of:

REPLACEMENT SHEET
03 APR 1999

receiving data to be recorded;

positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

opening a session by allocating lead-in and lead-out areas;

recording at least a portion of the data;

while the data is being recorded, analyzing a read-back signal for the presence of suspected recording errors;

if a suspected recording error is detected while the portion of data is being recorded:

halting the recording of data at the end of the portion;

reading the recorded data for the presence of unrecoverable errors in the first selected area;

if unrecoverable errors are found in the recorded data:

positioning the optical head at the beginning of a second selected area on the disk following the first selected area;

re-recording at least a portion of the data;

verifying while re-recording, the presence of unrecoverable errors in the second selected area; and

if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions, closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not the of areas containing unrecognizable errors.

REPLACEMENT SHEET
03 APR 1999

3. An optical drive unit comprising:

a disk loader;

an optical head;

read and write channels;

a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk;

means for receiving data to be recorded;

means for positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

means for opening a session by allocating lead-in and lead-out areas;

means for recording a portion of the data;

means for reading the recorded portion of data for the presence of unrecoverable errors;

means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area, re-recording the portion of the data and reading the re-recorded data for the presence of unrecoverable errors in the second selected area if unrecoverable errors are found in the recorded data; and

means for closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating locations of the beginning of the correctly recorded areas and not of the areas containing unrecordable areas if no unrecoverable errors are found in the entire recorded data including single recorded or re-recorded portions of data.

4. An optical unit comprising:

REPLACEMENT SHEET
03 APR 1999

a disk loader;

an optical head;

read and write channels;

a controller for directing the recordation of a packet of data onto a CD-R/E optical storage disk;

means for receiving data to be recorded;

means for positioning an optical head at the beginning of a first selected area on the disk to which the data is to be recorded;

means for opening a session by allocating lead-in and lead-out areas;

means for recording at least a portion of the data;

means for analyzing a read-back signal for the presence of suspected recording errors while the data is being recorded;

means for halting the recording of data at the end of the portion and reading the recorded data for the presence of unrecoverable errors in the first selected area if a suspected recording error is detected while the portion of data is being recorded;

means for positioning the optical head at the beginning of a second selected area on the disk following the first selected area, re-recording at least a portion of the data and verifying while re-recording, the presence of unrecoverable errors in the second selected area if unrecoverable errors are found in the recorded data; and

means for closing the session by recording the lead-in and lead-out areas and updating the table of contents which contains an entry indicating location of the beginning of the areas containing no unrecoverable errors and not of the areas containing unrecognizable errors if no unrecoverable errors are found in the re-recorded data, in the entire recorded data including the single records and re-recorded portions.

REPLACEMENT SHEET
03 APR ...

CD-ROM RECORDING

ABSTRACT

Methods for recording information onto CD-Recordable and CD-Erasable optical disks (12) are provided. In a first embodiment, after a session or packet of data is recorded, it is verified to detect unrecoverable errors. If no such errors are present, the session or packet is fixed and recording ends. If an unrecoverable error is detected, the session or packet is re-recorded in an area of the disk immediately following the originally recorded area. When the recorded data is verified as being readable, the session or packet is fixed by recording lead-in and lead-out areas on the disk and by updating a table of contents with the location of the verified data and not the originally recorded data. In a second embodiment, the data is checked as it is recorded. If a defect is suspected, recording halts and the presence of the defect is verified. If a defect is present, the data is re-recorded in an area of the disk immediately following the originally recorded area. When the data is verified as being readable, the session or packet is fixed and recording ends.

Fig. 1.

REPLACEMENT SHEET
03 APR 1999